

# **INFORMATION HANDOUT**

**For Contract No. 02-4E6004  
At 02-Tri-3-30.8/31.1**

**Identified by  
Project ID 0200020328**

## **MATERIALS INFORMATION**

Stockpile Site for Placement of Earth Material

**INFORMATIONAL HANDOUT**  
FOR A CONSTRUCTION CONTRACT  
ON STATE ROUTE 3  
IN TRINITY COUNTY

The  
**Weaverville Elementary School Sidewalk Installation Project**  
TRI 3-PM 30.8/31.3

For a  
**Stockpile Location for Placement  
of Earthen Material**  
POISON POND DISPOSAL SITE  
TRI 299-PM 46.0

Note: The records from this compilation may be inspected in the District Office at 1657 Riverside Drive Redding, CA 96001 or Contact the Disposal Site Coordinator, Russ Irvin, (530) 225-2084, email: Russell\_Irvin@dot.ca.gov

Facts stated herein are as known to the State of California, Caltrans, and are to be verified by the Contractor as per Section 2 "Bidding" of the 2010 Standard Specifications.

**Table of Contents**

General Information .....	2
Location Map .....	3
Site Plan Map .....	4

## General Information

This stockpile location is provided by Caltrans for the placement of excavated earthen material. The material can be deposited at the existing Caltrans disposal site on State Route 299 at PM 46.0 on the east bound side of the highway within Trinity County. It is located approximately 5.3 miles west of the project.

The site may be used by Caltrans Maintenance and other contractors without exclusive use to anyone. Use of this site must be coordinated with the Caltrans Weaverville Maintenance Supervisor or Superintendent who shall be contacted at least 2 weeks prior to the beginning of construction activities.

### Contact information:


Supervisor - Greg Duffy (530) 623-3895

Superintendent - Joe McNeely (530) 623-3628

### Provisions that apply:

- The only materials to be placed in the disposal site are earthen or rock materials; estimated quantity is 300-600 cubic yards. Access will be from the east end of the site through a locked gate. Make arrangements for access with the Weaverville Maintenance personnel listed above.
- Any slash or man-made materials must be disposed at a landfill.
- Section 19 of the 2010 Standard Specifications will apply to placement of earthen material from this project, including any material delivered to this site.
- Materials are to be placed within the site limits in an organized and safe manner, with no risk of instability to embankments and shall be compacted in accordance with section 19 of the 2010 Standard Specifications. Material may be stockpiled until all anticipated excavated material has been deposited and then the material uniformly graded.
- The contractor bears all liability for damage to haul vehicles and any facility or equipment damaged by the contractor's use of the site. The State assumes no liability for damage to contractor's equipment.
- Construction Storm Water Best Management Practices shall apply to this site. No additional compensation shall be made for placement of the erosion control measures at the disposal site. This site must be included in the contractor's Storm Water Pollution Control Program.
- Disposal or reuse of salvaged materials will be in accordance with Section 14 and Section 15 of the 2010 Standard Specifications.

### Location Map: Project Area & Material Disposal Site

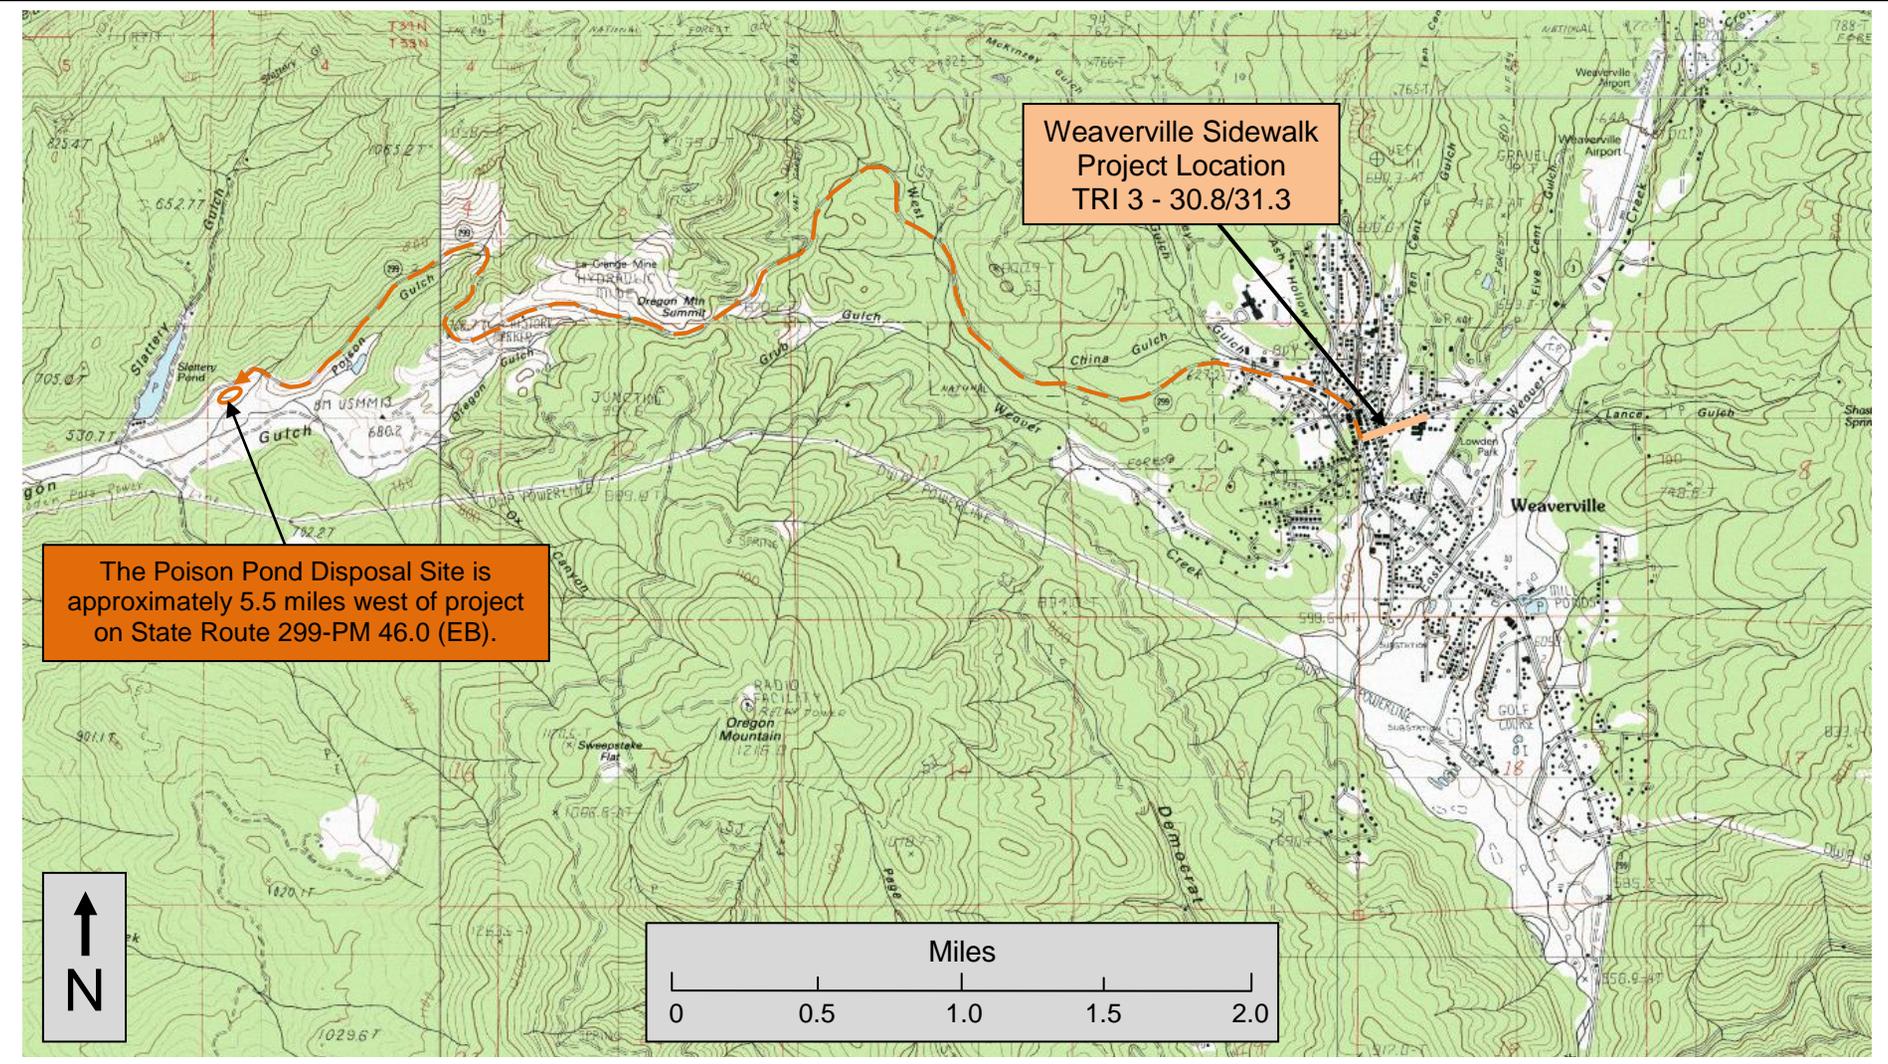

# Site Plan Map: Poison Pond Disposal Site

TRI 299 - 46.0 (EB)

