**** WARNING ** WARNING ** WARNING ** WARNING ****
**This document is intended for informational purposes only.**

Users are cautioned that California Department of Transportation (Department) does not assume any liability or responsibility based on these electronic files or for any defective or incomplete copying, exerpting, scanning, faxing or downloading of the contract documents. As always, for the official paper versions of the bidders packages and non-bidder packages, including addenda write to the California Department of Transportation, Plans and Bid Documents, Room 0200, P.O. Box 942874, Sacramento, CA 94272-0001, telephone (916) 654-4490 or fax (916) 654-7028. Office hours are 7:30 a.m. to 4:15 p.m. When ordering bidder or non-bidder packages it is important that you include a telephone number and fax number, P.O. Box and street address so that you can receive addenda.

STATE OF CALIFORNIA

DEPARTMENT OF TRANSPORTATION

# NOTICE TO CONTRACTORS

# AND

# SPECIAL PROVISIONS

## FOR CONSTRUCTION ON STATE HIGHWAY IN

**RIVERSIDE COUNTY AT GLEN AVON FROM ROUTE 15/60 SEPARATION TO VALLEY WAY UNDERCROSSING**

**DISTRICT 08, ROUTE 60**

**For Use in Connection with Standard Specifications Dated JULY 1999, Standard Plans Dated JULY 1999, and Labor Surcharge and Equipment Rental Rates.**

**CONTRACT NO. 08-354804**

**08-Riv-60-R0.8/11.1**

**Federal Aid Project**

**ACNH-P060(123)E**

**CMLN-6208(008)**

**Bids Open: December 15, 2005**
**Dated: October 24, 2005**

**OSD**

**********

# IMPORTANT SPECIAL NOTICES

**********

- Attention is directed to "Guarantee" of Section 5 of the special provisions regarding the Contractor's guarantee of contract work.

- Effective September 1, 2005, Padilla & Associates will no longer provide lists of certified DBEs to contractors bidding on projects. Padilla provided this service for contracts in Districts 05 (San Luis Obispo and Santa Barbara Counties), 06 (Kern County), 07, 08, 11 and 12.

  Contractors bidding on projects in these Districts may obtain lists of certified DBEs from the Department's Website at http://www.dot.ca.gov/hq/bep. The Department also publishes a yearly directory of certified firms that may be ordered from the Publications Unit at (916) 445-3520

- Attention is directed to Section 2-1.02B, "Submission of DBE Information," of the special provisions, regarding submittal of the "CALTRANS BIDDER – DBE INFORMATION" form and GOOD FAITH EFFORT (GFE) DOCUMENTATION form with the bid or by THE FOURTH DAY following bid opening.

A+B BIDDING SPECIAL NOTICE

The bidder's attention is directed to Section 2, "Proposal Requirements and Conditions," Section 3, "Award and Execution of Contract," and Section 4, "Beginning of Work, Time of Completion and Liquidated Damages," in the special provisions. In addition to the item prices and totals, the proposal shall set forth the number of working days bid to complete the work on the contract, except plant establishment. Bids will be compared on the basis of the sum of the item totals on the Engineer's Estimate for the work to be done (TOTAL BID (A)), plus the product of the number of working days bid to complete the work, except plant establishment, and the cost per day shown on the Engineer's Estimate (TOTAL BID (B)). The lowest bid will be determined on the basis of the "Total Basis for Comparison of Bids (A+B)" set forth in the Engineer's Estimate.

Bids in which the number of working days bid for completion of the work, except plant establishment, exceed the maximum number of days specified will be considered non-responsive and will be rejected.

# TABLE OF CONTENTS

NOTICE TO CONTRACTORS ..... 1
COPY OF ENGINEER'S ESTIMATE ..... 3
SPECIAL PROVISIONS ..... 11
SECTION 1. SPECIFICATIONS AND PLANS ..... 11
AMENDMENTS TO JULY 1999 STANDARD SPECIFICATIONS ..... 11
SECTION 2. PROPOSAL REQUIREMENTS AND CONDITIONS ..... 73
2-1.01 GENERAL ..... 73
2-1.015 FEDERAL LOBBYING RESTRICTIONS ..... 74
2-1.02 DISADVANTAGED BUSINESS ENTERPRISE (DBE) ..... 74
2-1.02A DBE GOAL FOR THIS PROJECT ..... 76
2-1.02B SUBMISSION OF DBE INFORMATION ..... 76
SECTION 3. AWARD AND EXECUTION OF CONTRACT ..... 78
SECTION 4. BEGINNING OF WORK, TIME OF COMPLETION AND LIQUIDATED DAMAGES ..... 78
SECTION 5. GENERAL ..... 78
SECTION 5-1. MISCELLANEOUS ..... 78
5-1.01 PLANS AND WORKING DRAWINGS ..... 78
5-1.011 EXAMINATION OF PLANS, SPECIFICATIONS, CONTRACT, AND SITE OF WORK ..... 79
5-1.012 DIFFERING SITE CONDITIONS ..... 79
5-1.013 LINES AND GRADES ..... 79
5-1.015 LABORATORY ..... 79
5-1.017 CONTRACT BONDS ..... 79
5-1.018 GUARANTEE ..... 79
5-1.019 COST REDUCTION INCENTIVE ..... 80
5-1.02 LABOR NONDISCRIMINATION ..... 81
5-1.022 EXCLUSION OF RETENTION ..... 81
5-1.023 UNSATISFACTORY PROGRESS ..... 81
5-1.03 INTEREST ON PAYMENTS ..... 81
5-1.04 PUBLIC SAFETY ..... 82
5-1.05 TESTING ..... 83
5-1.06 REMOVAL OF ASBESTOS AND HAZARDOUS SUBSTANCES ..... 83
5-1.065 SOLID WASTE DISPOSAL AND RECYCLING REPORT ..... 83
5-1.07 (BLANK) ..... 84
5-1.075 BUY AMERICA REQUIREMENTS ..... 84
5-1.08 SUBCONTRACTOR AND DBE RECORDS ..... 84
5-1.083 DBE CERTIFICATION STATUS ..... 84
5-1.086 PERFORMANCE OF DBE SUBCONTRACTORS AND SUPPLIERS ..... 85
5-1.09 SUBCONTRACTING ..... 85
5-1.10 PROMPT PROGRESS PAYMENT TO SUBCONTRACTORS ..... 86
5-1.103 RECORDS ..... 86
5-1.104 INTERNET DAILY EXTRA WORK REPORT ..... 86
5-1.11 PARTNERING ..... 86
5-1.114 VALUE ANALYSIS ..... 87
5-1.12 DISPUTE REVIEW BOARD ..... 88
5-1.13 FORCE ACCOUNT PAYMENT ..... 99
5-1.14 COMPENSATION ADJUSTMENTS FOR PRICE INDEX FLUCTUATIONS ..... 99
5-1.15 PAYMENTS ..... 100
5-1.16 PROJECT INFORMATION ..... 101
5-1.17 RELATIONS WITH CALIFORNIA DEPARTMENT OF FISH AND GAME ..... 102
5-1.18 RELATIONS WITH CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD ..... 102
5-1.19 AERIALLY DEPOSITED LEAD ..... 103
SECTION 6. (BLANK) ..... 103
SECTION 7. (BLANK) ..... 103
SECTION 8. MATERIALS ..... 103
SECTION 8-1. MISCELLANEOUS ..... 103

8-1.01 SUBSTITUTION OF NON-METRIC MATERIALS AND PRODUCTS ..... 103
8-1.02 PREQUALIFIED AND TESTED SIGNING AND DELINEATION MATERIALS ..... 110
8-1.03 STATE-FURNISHED MATERIALS ..... 116
8-1.04 SLAG AGGREGATE ..... 116
8-1.05 ENGINEERING FABRICS ..... 117
SECTION 8-2. CONCRETE ..... 117
8-2.01 PORTLAND CEMENT CONCRETE ..... 117
8-2.02 PRECAST CONCRETE QUALITY CONTROL ..... 119
GENERAL ..... 119
PRECAST CONCRETE QUALIFICATION AUDIT ..... 119
PRECAST CONCRETE QUALITY CONTROL PLAN ..... 119
REPORTING ..... 120
PAYMENT ..... 121
SECTION 8-3. WELDING ..... 121
8-3.01 WELDING ..... 121
GENERAL ..... 121
WELDING QUALITY CONTROL ..... 123
WELDING FOR OVERHEAD SIGN AND POLE STRUCTURES ..... 125
PAYMENT ..... 126
SECTION 9. DESCRIPTION OF BRIDGE WORK ..... 126
SECTION 10. CONSTRUCTION DETAILS ..... 126
SECTION 10-1. GENERAL ..... 126
10-1.00 CONSTRUCTION PROJECT INFORMATION SIGNS ..... 126
10-1.01 ORDER OF WORK ..... 127
10-1.02 WATER POLLUTION CONTROL ..... 128
RETENTION OF FUNDS ..... 129
STORM WATER POLLUTION PREVENTION PLAN PREPARATION, APPROVAL AND AMENDMENTS ..... 130
COST BREAK-DOWN ..... 131
SWPPP IMPLEMENTATION ..... 134
MAINTENANCE ..... 135
REPORTING REQUIREMENTS ..... 135
SAMPLING AND ANALYTICAL REQUIREMENTS ..... 136
PAYMENT ..... 137
10-1.03 TEMPORARY FENCE ..... 138
10-1.04 PRESERVATION OF PROPERTY ..... 138
10-1.05 DAMAGE REPAIR ..... 139
10-1.06 RELIEF FROM MAINTENANCE AND RESPONSIBILITY ..... 139
SCAFFOLDING ..... 139
10-1.07 COOPERATION ..... 140
10-1.08 PROGRESS SCHEDULE (CRITICAL PATH METHOD) ..... 140
DEFINITIONS ..... 140
GENERAL REQUIREMENTS ..... 140
COMPUTER SOFTWARE ..... 142
NETWORK DIAGRAMS, REPORTS AND DATA ..... 142
PRE-CONSTRUCTION SCHEDULING CONFERENCE ..... 143
BASELINE SCHEDULE ..... 143
UPDATE SCHEDULE ..... 144
TIME IMPACT ANALYSIS ..... 144
FINAL UPDATE SCHEDULE ..... 145
RETENTION ..... 145
PAYMENT ..... 145
10-1.09 TIME-RELATED OVERHEAD ..... 145
10-1.10 OBSTRUCTIONS ..... 148
10-1.11 DUST CONTROL ..... 148
10-1.12 MOBILIZATION ..... 148
10-1.13 CONSTRUCTION AREA TRAFFIC CONTROL DEVICES ..... 148
10-1.14 CONSTRUCTION AREA SIGNS ..... 149
10-1.15 MAINTAINING TRAFFIC ..... 149

10-1.16 CLOSURE REQUIREMENTS AND CONDITIONS ..... 158
CLOSURE SCHEDULE ..... 158
CONTINGENCY PLAN ..... 158
LATE REOPENING OF CLOSURES ..... 159
COMPENSATION ..... 159
10-1.17 TRAFFIC CONTROL SYSTEM FOR LANE CLOSURE ..... 159
STATIONARY LANE CLOSURE ..... 159
MOVING LANE CLOSURE ..... 160
PAYMENT ..... 160
10-1.18 TRAFFIC CONTROL SYSTEM FOR RAMP CLOSURES ..... 161
10-1.19 TEMPORARY PAVEMENT DELINEATION ..... 161
GENERAL ..... 161
TEMPORARY LANELINE AND CENTERLINE DELINEATION ..... 161
TEMPORARY EDGELINE DELINEATION ..... 162
MEASUREMENT AND PAYMENT ..... 162
10-1.20 BARRICADE ..... 163
10-1.21 FLASHING ARROW SIGN ..... 163
10-1.22 PORTABLE CHANGEABLE MESSAGE SIGN ..... 163
10-1.23 TEMPORARY RAILING ..... 163
10-1.24 CHANNELIZER ..... 164
10-1.25 CONES AND DELINEATORS ..... 164
10-1.26 TEMPORARY TRAFFIC SCREEN ..... 164
10-1.27 TEMPORARY CRASH CUSHION MODULE ..... 164
10-1.28 EXISTING HIGHWAY FACILITIES ..... 166
REMOVE BRIDGE RAILING ..... 166
REMOVE METAL BEAM GUARD RAILING ..... 166
REMOVE SIGN STRUCTURE ..... 166
REMOVE PAVEMENT MARKER ..... 166
REMOVE TRAFFIC STRIPE AND PAVEMENT MARKING ..... 166
ABANDON CULVERT ..... 167
REMOVE SIGN STRUCTURE ..... 168
REMOVE PAVEMENT MARKER ..... 168
REMOVE DRAINAGE FACILITY ..... 168
REMOVE ASPHALT CONCRETE DIKE ..... 168
REMOVE ROADSIDE SIGN ..... 168
RECONSTRUCT SIGN STRUCTURE ..... 169
REMOVE CHAIN LINK FENCE ..... 169
REMOVE TREES ..... 169
COLD PLANE ASPHALT CONCRETE PAVEMENT ..... 169
CAP INLET ..... 170
MODIFY INLET ..... 170
BRIDGE REMOVAL ..... 171
REMOVE CONCRETE ..... 173
10-1.29 CLEARING AND GRUBBING ..... 173
10-1.30 WATERING ..... 173
10-1.31 EARTHWORK ..... 173
10-1.32 SOIL ANCHOR ..... 174
WORKING DRAWINGS ..... 175
MATERIALS ..... 175
CONSTRUCTION ..... 176
TESTING ..... 177
MEASUREMENT ..... 178
PAYMENT ..... 178
10-1.33 MATERIAL CONTAINING AERIALLY DEPOSITED LEAD ..... 179
LEAD COMPLIANCE PLAN ..... 179
10-1.34 EROSION CONTROL (TYPE D) ..... 179
MATERIALS ..... 180
APPLICATION ..... 181
10-1.35 IRRIGATION CROSSOVERS ..... 182

10-1.36 LEAN CONCRETE BASE ..... 182
10-1.37 ASPHALT CONCRETE ..... 182
10-1.38 GRIND EXISTING CONCRETE PAVEMENT ..... 186
10-1.39 PILING ..... 186
GENERAL ..... 186
CAST-IN-DRILLED-HOLE CONCRETE PILES ..... 186
MEASUREMENT AND PAYMENT (PILING) ..... 187
10-1.40 PRESTRESSING CONCRETE ..... 187
10-1.41 CONCRETE STRUCTURES ..... 188
GENERAL ..... 188
FALSEWORK ..... 188
COST REDUCTION INCENTIVE PROPOSALS FOR CAST-IN-PLACE PRESTRESSED BOX GIRDER BRIDGES ..... 189
DECK CLOSURE POURS ..... 190
SLIDING BEARINGS ..... 190
ELASTOMERIC BEARING PADS ..... 190
DECK CRACK TREATMENT ..... 191
MEASUREMENT AND PAYMENT ..... 193
10-1.42 PTFE BEARING ..... 193
10-1.43 STRUCTURE APPROACH SLABS (TYPE N) ..... 196
GENERAL ..... 196
ENGINEERING FABRICS ..... 196
TREATED PERMEABLE BASE UNDER APPROACH SLAB ..... 196
APPROACH SLABS ..... 196
JOINTS ..... 197
MEASUREMENT AND PAYMENT ..... 197
10-1.44 STRUCTURE APPROACH SLABS (TYPE R) ..... 197
GENERAL ..... 198
TEMPORARY ROADWAY STRUCTURAL SECTION ..... 198
REMOVING EXISTING PAVEMENT AND BASE MATERIALS ..... 198
AGGREGATE BASE (APPROACH SLAB) ..... 199
STRUCTURE APPROACH SLAB ..... 199
JOINTS ..... 200
MEASUREMENT AND PAYMENT ..... 200
10-1.45 PAVING NOTCH EXTENSION ..... 201
10-1.46 SOUND WALL ..... 202
DESCRIPTION ..... 202
SOUND WALL (MASONRY BLOCK) ..... 202
ACCESS GATES ..... 203
MEASUREMENT AND PAYMENT ..... 204
10-1.47 DRILL AND BOND DOWELS ..... 204
10-1.48 CLEAN EXPANSION JOINTS ..... 204
10-1.49 SEALING JOINTS ..... 205
10-1.50 REINFORCEMENT ..... 205
MEASUREMENT AND PAYMENT ..... 205
10-1.51 HEADED BAR REINFORCEMENT ..... 205
GENERAL ..... 206
PRODUCTION TESTS ..... 206
MEASUREMENT AND PAYMENT ..... 207
10-1.52 SIGN STRUCTURES ..... 207
10-1.53 ROADSIDE SIGNS ..... 209
10-1.54 INSTALL SIGN PANEL ON EXISTING FRAME ..... 209
10-1.55 INSTALL SIGN OVERLAY ..... 210
10-1.56 FURNISH SIGN ..... 210
QUALITY CONTROL FOR SIGNS ..... 210
SINGLE SHEET ALUMINUM SIGN ..... 212
10-1.57 CLEAN AND PAINT STRUCTURAL STEEL ..... 212
CLEANING ..... 212
PAINTING ..... 212

10-1.58 ALTERNATIVE PIPE ..... 213
10-1.59 REINFORCED CONCRETE PIPE ..... 213
10-1.60 OVERSIDE DRAIN ..... 213
10-1.61 MISCELLANEOUS FACILITIES ..... 213
10-1.62 SLOPE PROTECTION ..... 213
10-1.63 SLOPE PAVING ..... 213
10-1.64 MISCELLANEOUS IRON AND STEEL ..... 213
10-1.65 CHAIN LINK FENCE ..... 213
10-1.66 TRANSITION RAILING (TYPE WB) ..... 214
10-1.67 METAL BEAM GUARD RAILING ..... 214
ALTERNATIVE FLARED TERMINAL SYSTEM ..... 214
10-1.68 CHAIN LINK RAILING ..... 215
10-1.69 CONCRETE BARRIER ..... 215
10-1.70 THERMOPLASTIC TRAFFIC STRIPE AND PAVEMENT MARKING ..... 215
10-1.71 PAINT TRAFFIC STRIPE AND PAVEMENT MARKING ..... 215
10-1.72 PAVEMENT MARKERS ..... 216
SECTION 10-2 HIGHWAY PLANTING AND IRRIGATION SYSTEMS ..... 216
10-2.01 GENERAL ..... 216
PROGRESS INSPECTIONS ..... 216
COST BREAK-DOWN ..... 216
MAINTAIN EXISTING PLANTED AREAS ..... 220
REMOVE EXISTING PLANTS FOR TRENCHING ..... 220
10-2.02 EXISTING HIGHWAY IRRIGATION FACILITIES ..... 221
CHECK AND TEST EXISTING IRRIGATION FACILITIES ..... 221
10-2.03 HIGHWAY PLANTING ..... 221
HIGHWAY PLANTING MATERIALS ..... 221
ROADSIDE CLEARING ..... 221
PESTICIDES ..... 222
PREPARE HOLES ..... 222
PLANTING ..... 223
PLANT ESTABLISHMENT WORK ..... 223
10-2.04 IRRIGATION SYSTEMS ..... 223
VALVE BOXES ..... 224
ELECTRIC AUTOMATIC IRRIGATION COMPONENTS ..... 224
ARMOR-CLAD CONDUCTORS ..... 225
IRRIGATION SYSTEMS FUNCTIONAL TEST ..... 226
PIPE ..... 226
WATER METER ..... 226
BACKFLOW PREVENTER ASSEMBLIES ..... 226
BACKFLOW PREVENTER ASSEMBLY ENCLOSURE ..... 226
TESTING NEW BACKFLOW PREVENTERS ..... 227
SPRINKLERS ..... 227
FINAL IRRIGATION SYSTEM CHECK ..... 227
SECTION 10-3. SIGNALS, LIGHTING AND ELECTRICAL SYSTEMS ..... 228
10-3.01 DESCRIPTION ..... 228
10-3.02 COST BREAK-DOWN ..... 228
10-3.03 MAINTAINING EXISTING AND TEMPORARY ELECTRICAL SYSTEMS ..... 228
10-3.04 FOUNDATIONS ..... 228
10-3.05 STANDARDS, STEEL PEDESTALS, AND POSTS ..... 229
10-3.06 CONDUIT ..... 229
STEEL SLEEVES ..... 229
FIBER OPTIC CONDUIT ..... 229
MULTIDUCT CONDUIT ..... 230
CONDUIT AND INNERDUCT SEALING PLUGS ..... 230
TRACER WIRE ..... 230
WARNING TAPE ..... 230
COLORED CONCRETE BACKFILL ..... 231
INNERDUCT ..... 231
10-3.07 ROUND TRAFFIC FIBER OPTIC SPLICE VAULTS ..... 231

10-3.08 CONDUCTORS AND WIRING ..... 231
10-3.09 BONDING AND GROUNDING ..... 232
10-3.10 SERVICE ..... 232
10-3.11 DETECTORS ..... 232
10-3.12 TRAFFIC MONITORING STATION ..... 232
10-3.13 LUMINAIRES ..... 232
10-3.14 SIGN LIGHTING FIXTURES-INDUCTION ..... 232
10-3.15 REMOVING, REINSTALLING OR SALVAGING ELECTRICAL EQUIPMENT ..... 233
10-3.16 PAYMENT ..... 234
SECTION 11. (BLANK) ..... 234
SECTION 12. (BLANK) ..... 234
SECTION 13. RAILROAD RELATIONS ..... 234
13-1.01 GENERAL ..... 234
13-1.02 RAILROAD REQUIREMENTS ..... 234
13-1.03 PROTECTION OF RAILROAD FACILITIES ..... 236
13-1.04 WORK BY RAILROAD ..... 236
13-1.05 DELAYS DUE TO WORK BY RAILROAD ..... 236
13-1.06 LEGAL RELATIONS ..... 236
CONTRACTOR'S RIGHT OF ENTRY AGREEMENT ..... 237
UNION PACIFIC RAILROAD COMPANY ..... 239
TO CONTRACTOR'S RIGHT OF ENTRY AGREEMENT ..... 241
SECTION 14 FEDERAL REQUIREMENTS FOR FEDERAL-AID CONSTRUCTION PROJECTS ..... 249
FEDERAL REQUIREMENT TRAINING SPECIAL PROVISIONS ..... 268

# STANDARD PLANS LIST

The Standard Plan sheets applicable to this contract include, but are not limited to those indicated below. The Revised Standard Plans (RSP) and New Standard Plans (NSP) which apply to this contract are included as individual sheets of the project plans.

| | |
|---|---|
| A10A | Abbreviations |
| A10B | Symbols |
| A20A | Pavement Markers and Traffic Lines, Typical Details |
| A20B | Pavement Markers and Traffic Lines, Typical Details |
| A20C | Pavement Markers and Traffic Lines, Typical Details |
| A20D | Pavement Markers and Traffic Lines, Typical Details |
| A24A | Pavement Markings - Arrows |
| A24B | Pavement Markings - Arrows |
| A24C | Pavement Markings - Symbols and Numerals |
| A24D | Pavement Markings - Words |
| A24E | Pavement Markings - Words and Crosswalks |
| RSP A35A | Portland Cement Concrete Pavement (Undoweled Transverse Joints) |
| A35C | Portland Cement Concrete Pavement Joint and End Anchor Details |
| A62D | Excavation and Backfill - Concrete Pipe Culverts |
| RSP A62DA | Excavation and Backfill - Concrete Pipe Culverts |
| A73A | Object Markers |
| A73B | Markers |
| RSP A73C | Delineators, Channelizers and Barricades |
| A76D | Concrete Barrier Type 60G |
| A76E | Concrete Barrier Type 60G |

| | |
|---|---|
| A76F | Concrete Barrier Type 60GE |
| A77A | Metal Beam Guard Railing – Typical Wood Post With Wood Block |
| A77B | Metal Beam Guard Railing - Standard Hardware |
| A77C | Metal Beam Guard Railing – Wood Post and Wood Block Details |
| A77D | Metal Beam Guard Railing – Typical Layouts |
| A77FA | Metal Beam Guard Railing – Typical Line Post Installation |
| RSP A77L | Metal Beam Guard Railing and Single Faced Barrier Railing Terminal System - End Treatments |
| A87 | Curbs, Dikes and Driveways |
| D73 | Drainage Inlets |
| D74B | Drainage Inlets |
| D74C | Drainage Inlet Details |
| D77A | Grate Details |
| D87A | Corrugated Metal Pipe Downdrain Details |
| D93B | Drainage Inlet Riser Connections |
| D94A | Metal and Plastic Flared End Sections |
| D94B | Concrete Flared End Sections |
| D97C | Corrugated Metal Pipe Coupling Details No. 3 - Helical and Universal Couplers |
| D97H | Reinforced Concrete Pipe or Non-Reinforced Concrete Pipe - Standard and Positive Joints |
| H1 | Planting and Irrigation - Abbreviations |
| H2 | Planting and Irrigation - Symbols |
| H3 | Planting and Irrigation Details |
| H4 | Planting and Irrigation Details |
| H5 | Planting and Irrigation Details |
| H6 | Planting and Irrigation Details |
| H7 | Planting and Irrigation Details |
| H8 | Planting and Irrigation Details |
| T1A | Temporary Crash Cushion, Sand Filled (Unidirectional) |
| T1B | Temporary Crash Cushion, Sand Filled (Bidirectional) |
| RSP T2 | Temporary Crash Cushion, Sand Filled (Shoulder Installations) |
| T3 | Temporary Railing (Type K) |
| T4 | Temporary Traffic Screen |
| T5 | Temporary Terminal Section (Type K) |
| RSP T7 | Construction Project Funding Identification Signs |
| RSP T10 | Traffic Control System for Lane Closure On Freeways and Expressways |
| RSP T11 | Traffic Control System for Lane Closure On Multilane Conventional Highways |
| RSP T12 | Traffic Control System for Lane Closure On Multilane Conventional Highways |
| RSP T14 | Traffic Control System for Ramp Closure |
| RSP T15 | Traffic Control System for Moving Lane Closure On Multilane Highways |
| RSP T16 | Traffic Control System for Moving Lane Closure On Multilane Highways |
| B0-1 | Bridge Details |
| RSP B0-3 | Bridge Details |
| B0-5 | Bridge Details |
| B0-13 | Bridge Details |
| B2-3 | 400 mm Cast-In-Drilled Hole-Concrete Pile |
| B2-5 | Pile Details-Class 400 and Class 625 |
| B6-21 | Joint Seals (Maximum Movement Rating = 50 mm) |
| B7-1 | Box Girder Details |
| B8-5 | Cast-in-Place Prestressed Girder Details |
| B14-3 | Communication and Sprinkler Control Conduits (Conduit Less Than size 103) |
| RS1 | Roadside Signs, Typical Installation Details No. 1 |
| RS2 | Roadside Signs - Wood Post, Typical Installation Details No. 2 |
| RS4 | Roadside Signs, Typical Installation Details No. 4 |
| RSP S1 | Overhead Signs - Truss, Instructions and Examples |
| NSP S2A | Overhead Signs - Truss, Single Post Type, Post Types II through IX |
| NSP S4A | Overhead Signs - Truss, Single Post Type, Structural Frame Members Details No. 1 |

| | |
|---|---|
| NSP S4B | Overhead Signs - Truss, Single Post Type, Structural Frame Members Details No. 2 |
| RSP S5 | Overhead Signs - Truss, Two Post Type, Structural Frame Members |
| RSP S6 | Overhead Signs - Truss, Structural Frame Details |
| RSP S7 | Overhead Signs - Truss, Frame Juncture Details |
| RSP S8A | Overhead Signs - Steel Frames - Removable Sign Panel Frames |
| RSP S8B | Overhead Signs - Removable Sign Panel Frames, Mounting Details |
| RSP S8C | Overhead Signs - Truss, Sign Mounting Details, Laminated Panel – Type A |
| RSP S8D | Overhead Signs - Truss, Removable Sign Panel Frames, 2794 mm and 3048 mm Sign Panels |
| RSP S9 | Overhead Signs - Walkway Details No. 1 |
| RSP S10 | Overhead Signs - Walkway Details No. 2 |
| NSP S10A | Overhead Signs - Walkway Details No. 3 |
| RSP S11 | Overhead Signs - Walkway Safety Railing Details |
| NSP S13A | Overhead Signs - Truss, Single Post Type, Square Pedestal Pile Foundation |
| NSP S13B | Overhead Signs - Truss, Single Post Type, Round Pedestal Pile Foundation |
| ES-1A | Signal, Lighting and Electrical Systems - Symbols and Abbreviations |
| ES-1B | Signal, Lighting and Electrical Systems - Symbols and Abbreviations |
| ES-2A | Signal, Lighting and Electrical Systems - Service Equipment |
| ES-2C | Signal, Lighting and Electrical Systems - Service Equipment Notes, Type III Series |
| ES-2F | Signal, Lighting and Electrical Systems - Service Equipment and Typical Wiring Diagram Type III-C Series |
| ES-3C | Signal, Lighting and Electrical Systems - Controller Cabinet Details |
| ES-5A | Signal, Lighting and Electrical Systems - Detectors |
| ES-5B | Signal, Lighting and Electrical Systems - Detectors |
| ES-5C | Signal, Lighting and Electrical Systems - Detectors |
| ES-5E | Signal, Lighting and Electrical Systems - Detectors |
| RSP ES-6A | Lighting Standards - Types 15, 21 and 22 |
| RSP ES-6B | Lighting Standards - Types 15 AND 21, Barrier Rail Mounted Details |
| ES-6E | Lighting Standards - Types 30 and 31 |
| RSP ES-6F | Lighting Standards - Type 30 and 31 Base Plate Details |
| ES-7N | Signal and Lighting Standards - Details No. 2 |
| ES-8 | Signal, Lighting and Electrical Systems - Pull Box Details |
| ES-9A | Signal, Lighting and Electrical Systems - Electrical Details, Structure Installations |
| ES-9B | Signal, Lighting and Electrical Systems - Electrical Details, Structure Installations |
| ES-9C | Signal, Lighting and Electrical Systems - Electrical Details, Structure Installations |
| ES-9D | Signal, Lighting and Electrical Systems - Electrical Details, Structure Installations |
| ES-9E | Signal, Lighting and Electrical Systems - Electrical Details, Structure Installations |
| ES-9F | Signal, Lighting and Electrical Systems - Flush Soffit Luminaire Modification Details, Structure Installations |
| ES-10 | Signal, Lighting and Electrical Systems - Isolux Diagrams |
| ES-11 | Signal, Lighting and Electrical Systems - Foundation Installations |
| ES-13A | Signal, Lighting and Electrical Systems - Splicing Details |
| ES-13B | Signal, Lighting and Electrical Systems - Wiring Details and Fuse Ratings |
| ES-15C | Sign Illumination - Sign Illumination Equipment |
| ES-15D | Sign Illumination - Sign Illumination Control |

**DEPARTMENT OF TRANSPORTATION**

# NOTICE TO CONTRACTORS

**CONTRACT NO. 08-354804**

**08-Riv-60-R0.8/11.1**

Sealed proposals for the work shown on the plans entitled:

**STATE OF CALIFORNIA; DEPARTMENT OF TRANSPORTATION; PROJECT PLANS FOR CONSTRUCTION ON STATE HIGHWAY IN RIVERSIDE COUNTY AT GLEN AVON FROM ROUTE 15/60 SEPARATION TO VALLEY WAY UNDERCROSSING**

will be received at the Department of Transportation, 3347 Michelson Drive, Suite 100, Irvine, CA 92612-1692, until 2 o'clock p.m. on December 15, 2005, at which time they will be publicly opened and read in Room C - 1116 at the same address.

Proposal forms for this work are included in a separate book entitled:

**STATE OF CALIFORNIA; DEPARTMENT OF TRANSPORTATION; PROPOSAL AND CONTRACT FOR CONSTRUCTION ON STATE HIGHWAY IN RIVERSIDE COUNTY AT GLEN AVON FROM ROUTE 15/60 SEPARATION TO VALLEY WAY UNDERCROSSING**

General work description: 6-lane Hwy widened to 10-lane Hwy , Widen Brdgs, Const Sound Walls

This project has a goal of 8 percent disadvantaged business enterprise (DBE) participation.

No prebid meeting is scheduled for this project.

**THIS PROJECT IS SUBJECT TO THE "BUY AMERICA" PROVISIONS OF THE SURFACE TRANSPORTATION ASSISTANCE ACT OF 1982 AS AMENDED BY THE INTERMODAL SURFACE TRANSPORTATION EFFICIENCY ACT OF 1991.**

Bids are required for the entire work described herein.

At the time this contract is awarded, the Contractor shall possess either a Class A license or one of the following Class C licenses: C-8, C-12,

This contract is subject to state contract nondiscrimination and compliance requirements pursuant to Government Code, Section 12990.

Inquiries or questions based on alleged patent ambiguity of the plans, specifications or estimate must be communicated as a bidder inquiry prior to bid opening. Any such inquiries or questions, submitted after bid opening, will not be treated as a bid protest.

Bidder inquiries may be made as follows:

The Department will consider bidder inquiries only when completed "Bidder Inquiry" form is submitted. A copy of the "Bidder Inquiry" form is available on the Internet at the address shown below. Submit "Bidder Inquiry" forms to:

Department of Transportation
Construction Program Duty Senior
464 West 4th Street, 6th Floor, CCO/Pre-Bid Inquiry Desk
San Bernardino, CA 92401-1400

Fax Number: (909) 383-6739
http://www.dot.ca.gov/dist8/construction

To expedite processing, submittal of "Bidder Inquiry" forms via internet is preferred.

To the extent feasible and at the discretion of the Department, completed "Bidder Inquiry" forms submitted for consideration will be investigated, and responses will be posted on the Internet at:

http://www.dot.ca.gov/dist8/construction

The responses to bidder's inquiries, unless incorporated into formal addenda to the contract, are not part of the contract and are provided for bidder's convenience only. In some instances, the question and answer may represent a summary of the matters discussed rather than a word-for-word recitation. The availability or use of information provided in the responses to bidder's inquiries is not to be construed in any way as a waiver of the provisions of Section 2-1.03 of the Standard Specifications or any other provision of the contract, the plans, Standard Specifications or Special Provisions, nor to excuse the contractor from full compliance with those contract requirements. Bidders are cautioned that subsequent to responses or contract addenda may affect or vary a response previously given.

Project plans, special provisions, and proposal forms for bidding this project can only be obtained at the Department of Transportation, Plans and Bid Documents, Room 0200, MS #26, Transportation Building, 1120 N Street, Sacramento, California 95814, FAX No. (916) 654-7028, Telephone No. (916) 654-4490. Use FAX orders to expedite orders for project plans, special provisions and proposal forms. FAX orders must include credit card charge number, card expiration date and authorizing signature. Project plans, special provisions, and proposal forms may be seen at the above Department of Transportation office and at the offices of the District Directors of Transportation at Irvine, Oakland, and the district in which the work is situated. Standard Specifications and Standard Plans are available through the State of California, Department of Transportation, Publications Unit, 1900 Royal Oaks Drive, Sacramento, CA 95815, Telephone No. (916) 445-3520.

The successful bidder shall furnish a payment bond and a performance bond.

The Department of Transportation hereby notifies all bidders that it will affirmatively ensure that in any contract entered into pursuant to this advertisement, disadvantaged business enterprises will be afforded full opportunity to submit bids in response to this invitation.

The U.S. Department of Transportation (DOT) provides a toll-free "hotline" service to report bid rigging activities. Bid rigging activities can be reported Mondays through Fridays, between 8:00 a.m. and 5:00 p.m., eastern time, Telephone No. 1-800-424-9071. Anyone with knowledge of possible bid rigging, bidder collusion, or other fraudulent activities should use the "hotline" to report these activities. The "hotline" is part of the DOT's continuing effort to identify and investigate highway construction contract fraud and abuse and is operated under the direction of the DOT Inspector General. All information will be treated confidentially and caller anonymity will be respected.

Pursuant to Section 1773 of the Labor Code, the general prevailing wage rates in the county, or counties, in which the work is to be done have been determined by the Director of the California Department of Industrial Relations. These wages are set forth in the General Prevailing Wage Rates for this project, available at the Labor Compliance Office at the offices of the District Director of Transportation for the district in which the work is situated, and available from the California Department of Industrial Relations' internet web site at: http://www.dir.ca.gov. The Federal minimum wage rates for this project as predetermined by the United States Secretary of Labor are available through the California Department of Transportation's Electronic Project Document Distribution Site on the internet at http://hqidoc1.dot.ca.gov/. Addenda to modify the Federal minimum wage rates, if necessary, will be issued to holders of "Proposal and Contract" books. Future effective general prevailing wage rates which have been predetermined and are on file with the California Department of Industrial Relations are referenced but not printed in the general prevailing wage rates.

If there is a difference between the minimum wage rates predetermined by the United States Secretary of Labor and the general prevailing wage rates determined by the Director of the California Department of Industrial Relations for similar classifications of labor, the Contractor and subcontractors shall pay not less than the higher wage rate. The Department will not accept lower State wage rates not specifically included in the Federal minimum wage determinations. This includes "helper" (or other classifications based on hours of experience) or any other classification not appearing in the Federal wage determinations. Where Federal wage determinations do not contain the State wage rate determination otherwise available for use by the Contractor and subcontractors, the Contractor and subcontractors shall pay not less than the Federal minimum wage rate which most closely approximates the duties of the employees in question.

DEPARTMENT OF TRANSPORTATION

Deputy Director Transportation Engineering

Dated October 24, 2005

MCT

**COPY OF ENGINEER'S ESTIMATE**

**(NOT TO BE USED FOR BIDDING PURPOSES)**

**08-354804**

| Item No. | Item Code | Item Description | Unit of Measure | Estimated Quantity |
|---|---|---|---|---|
| 1 | 070010 | PROGRESS SCHEDULE (CRITICAL PATH) | LS | LUMP SUM |
| 2 | 070018 | TIME-RELATED OVERHEAD | LS | LUMP SUM |
| 3 | 071322 | TEMPORARY FENCE (TYPE CL-1.8) | M | 380 |
| 4 | 074019 | PREPARE STORM WATER POLLUTION PREVENTION PLAN | LS | LUMP SUM |
| 5 | 074020 | WATER POLLUTION CONTROL | LS | LUMP SUM |
| 6 (S) | 120090 | CONSTRUCTION AREA SIGNS | LS | LUMP SUM |
| 7 (S) | 120100 | TRAFFIC CONTROL SYSTEM | LS | LUMP SUM |
| 8 (S) | 037820 | FLASHING ARROW SIGN | EA | 10 |
| 9 (S) | 120116 | TYPE II BARRICADE | EA | 180 |
| 10 (S) | 120120 | TYPE III BARRICADE | EA | 8 |
| 11 | 120165 | CHANNELIZER (SURFACE MOUNTED) | EA | 940 |
| 12 (S) | 128650 | PORTABLE CHANGEABLE MESSAGE SIGN | EA | 10 |
| 13 | 129000 | TEMPORARY RAILING (TYPE K) | M | 14 500 |
| 14 (S) | 129100 | TEMPORARY CRASH CUSHION MODULE | EA | 270 |
| 15 (S) | 129150 | TEMPORARY TRAFFIC SCREEN | M | 24 600 |
| 16 | 150206 | ABANDON CULVERT | EA | 1 |
| 17 | 150608 | REMOVE CHAIN LINK FENCE | M | 450 |
| 18 | 150662 | REMOVE METAL BEAM GUARD RAILING | M | 1830 |
| 19 | 150703 | REMOVE YELLOW PAINTED TRAFFIC STRIPE AND PAVEMENT MARKING | M | 27 500 |
| 20 | 150711 | REMOVE PAINTED TRAFFIC STRIPE | M | 56 900 |

| Item No. | Item Code | Item Description | Unit of Measure | Estimated Quantity |
|---|---|---|---|---|
| 21 | 150712 | REMOVE PAINTED PAVEMENT MARKING | M2 | 48 |
| 22 | 150714 | REMOVE THERMOPLASTIC TRAFFIC STRIPE | M | 59 100 |
| 23 | 150722 | REMOVE PAVEMENT MARKER | EA | 39 000 |
| 24 | 150730 | REMOVE CHANNELIZERS | EA | 57 |
| 25 | 150742 | REMOVE ROADSIDE SIGN | EA | 14 |
| 26 | 150744 | REMOVE ROADSIDE SIGN (WOOD POST) | EA | 7 |
| 27 | 150748 | REMOVE ROADSIDE SIGN PANEL | EA | 2 |
| 28 | 150760 | REMOVE SIGN STRUCTURE | EA | 10 |
| 29 | 040067 | RECONSTRUCT SIGN STRUCTURE, (LOCATION A) | LS | LUMP SUM |
| 30 | 040068 | RECONSTRUCT SIGN STRUCTURE, (LOCATION B) | LS | LUMP SUM |
| 31 | 150771 | REMOVE ASPHALT CONCRETE DIKE | M | 6500 |
| 32 | 150806 | REMOVE PIPE | M | 180 |
| 33 | 150820 | REMOVE INLET | EA | 22 |
| 34 | 152372 | RELOCATE CONCRETE BARRIER (TYPE K) | M | 10 100 |
| 35 | 152604 | MODIFY INLET | EA | 36 |
| 36 | 153103 | COLD PLANE ASPHALT CONCRETE PAVEMENT | M2 | 59 500 |
| 37 | 153210 | REMOVE CONCRETE | M3 | 33 |
| 38 | 155003 | CAP INLET | EA | 19 |
| 39 | 156577 | REMOVE BARRIER RAILING | M | 310 |
| 40 | 156579 | REMOVE BRIDGE RAILING | M | 540 |

| Item No. | Item Code | Item Description | Unit of Measure | Estimated Quantity |
|---|---|---|---|---|
| 41 | 157561 | BRIDGE REMOVAL (PORTION), LOCATION A | LS | LUMP SUM |
| 42 | 157562 | BRIDGE REMOVAL (PORTION), LOCATION B | LS | LUMP SUM |
| 43 | 157563 | BRIDGE REMOVAL (PORTION), LOCATION C | LS | LUMP SUM |
| 44 | 157564 | BRIDGE REMOVAL (PORTION), LOCATION D | LS | LUMP SUM |
| 45 | 157565 | BRIDGE REMOVAL (PORTION), LOCATION E | LS | LUMP SUM |
| 46 | 157566 | BRIDGE REMOVAL (PORTION), LOCATION F | LS | LUMP SUM |
| 47 | 157567 | BRIDGE REMOVAL (PORTION), LOCATION G | LS | LUMP SUM |
| 48 | 157568 | BRIDGE REMOVAL (PORTION), LOCATION H | LS | LUMP SUM |
| 49 | 160101 | CLEARING AND GRUBBING | LS | LUMP SUM |
| 50 | 170101 | DEVELOP WATER SUPPLY | LS | LUMP SUM |
| 51 | 190101 | ROADWAY EXCAVATION | M3 | 38 500 |
| 52 | 190110 | LEAD COMPLIANCE PLAN | LS | LUMP SUM |
| 53 | 192003 | STRUCTURE EXCAVATION (BRIDGE) | M3 | 2081 |
| 54 | 192037 | STRUCTURE EXCAVATION (RETAINING WALL) | M3 | 720 |
| 55 | 193003 | STRUCTURE BACKFILL (BRIDGE) | M3 | 1319 |
| 56 | 193013 | STRUCTURE BACKFILL (RETAINING WALL) | M3 | 250 |
| 57 (S) | 040069 | SOIL ANCHOR | M | 2027 |
| 58 (S) | 200001 | HIGHWAY PLANTING | LS | LUMP SUM |
| 59 (S) | 203003 | STRAW (EROSION CONTROL) | TONN | .8 |
| 60 (S) | 203014 | FIBER (EROSION CONTROL) | KG | 310 |

| Item No. | Item Code | Item Description | Unit of Measure | Estimated Quantity |
|---|---|---|---|---|
| 61 (S) | 203045 | PURE LIVE SEED (EROSION CONTROL) | KG | 4 |
| 62 (S) | 203056 | COMMERCIAL FERTILIZER (EROSION CONTROL) | KG | 58 |
| 63 (S) | 203061 | STABILIZING EMULSION (EROSION CONTROL) | KG | 150 |
| 64 (S) | 204099 | PLANT ESTABLISHMENT WORK | LS | LUMP SUM |
| 65 (S) | 208000 | IRRIGATION SYSTEM | LS | LUMP SUM |
| 66 (S) | 208731 | 200 MM CORRUGATED HIGH DENSITY POLYETHYLENE PIPE CONDUIT | M | 40 |
| 67 (S) | 208799 | 250 MM WELDED STEEL PIPE CONDUIT (6.35 MM THICK) | M | 15 |
| 68 | 260210 | AGGREGATE BASE (APPROACH SLAB) | M3 | 34 |
| 69 | 280000 | LEAN CONCRETE BASE | M3 | 25 500 |
| 70 | 390155 | ASPHALT CONCRETE (TYPE A) | TONN | 15 400 |
| 71 | 394048 | PLACE ASPHALT CONCRETE DIKE (TYPE E) | M | 3080 |
| 72 | 394049 | PLACE ASPHALT CONCRETE DIKE (TYPE F) | M | 450 |
| 73 | 401000 | CONCRETE PAVEMENT | M3 | 48 900 |
| 74 | 404092 | SEAL PAVEMENT JOINT | M | 95 000 |
| 75 | 037821 | 200 MM THERMOPLASTIC TRAFFIC STRIPE (BROKEN 3.66M-0.9M) | M | 3900 |
| 76 (S) | 420201 | GRIND EXISTING CONCRETE PAVEMENT | M2 | 19 900 |
| 77 (S) | 490655 | 400 MM CAST-IN-DRILLED-HOLE CONCRETE PILING | M | 420 |
| 78 | 490753 | FURNISH PILING (CLASS 625) | M | 622 |
| 79 (S) | 490754 | DRIVE PILE (CLASS 625) | EA | 78 |
| 80 (S) | 498024 | 400 MM CAST-IN-DRILLED-HOLE CONCRETE PILING (BARRIER) | M | 16 200 |

| Item No. | Item Code | Item Description | Unit of Measure | Estimated Quantity |
|---|---|---|---|---|
| 81 (S) | 500001 | PRESTRESSING CAST-IN-PLACE CONCRETE | LS | LUMP SUM |
| 82 (F) | 510051 | STRUCTURAL CONCRETE, BRIDGE FOOTING | M3 | 266 |
| 83 (F) | 510053 | STRUCTURAL CONCRETE, BRIDGE | M3 | 4717 |
| 84 | 510060 | STRUCTURAL CONCRETE, RETAINING WALL | M3 | 410 |
| 85 (F) | 510072 | STRUCTURAL CONCRETE, BARRIER SLAB | M3 | 449 |
| 86 (F) | 510086 | STRUCTURAL CONCRETE, APPROACH SLAB (TYPE N) | M3 | 809 |
| 87 | 510087 | STRUCTURAL CONCRETE, APPROACH SLAB (TYPE R) | M3 | 329 |
| 88 | 510502 | MINOR CONCRETE (MINOR STRUCTURE) | M3 | 26 |
| 89 | 510800 | PAVING NOTCH EXTENSION | M3 | 15 |
| 90 | 511106 | DRILL AND BOND DOWEL | M | 212 |
| 91 | 511118 | CLEAN EXPANSION JOINT | M | 374 |
| 92 | 517961 | SOUND WALL (BARRIER) (MASONRY BLOCK) | M2 | 19 511 |
| 93 | 518002 | SOUND WALL (MASONRY BLOCK) | M2 | 1470 |
| 94 (S) | 518050 | PTFE BEARING | EA | 16 |
| 95 (S) | 519102 | JOINT SEAL (TYPE AL) | M | 45 |
| 96 (S) | 519120 | JOINT SEAL (MR 15 MM) | M | 271 |
| 97 (S) | 519142 | JOINT SEAL (MR 40 MM) | M | 102 |
| 98 (S) | 519144 | JOINT SEAL (MR 50 MM) | M | 458 |
| 99 (S-F) | 520101 | BAR REINFORCING STEEL | KG | 36 150 |
| 100 (S-F) | 520102 | BAR REINFORCING STEEL (BRIDGE) | KG | 659 590 |

| Item No. | Item Code | Item Description | Unit of Measure | Estimated Quantity |
|---|---|---|---|---|
| 101 (S-F) | 520120 | HEADED BAR REINFORCEMENT | EA | 40 |
| 102 (F) | 560218 | FURNISH SIGN STRUCTURE (TRUSS) | KG | 95 720 |
| 103 (S-F) | 560219 | INSTALL SIGN STRUCTURE (TRUSS) | KG | 95 720 |
| 104 (S) | 561008 | 760 MM CAST-IN-DRILLED-HOLE CONCRETE PILE (SIGN FOUNDATION) | M | 32 |
| 105 (S) | 561009 | 920 MM CAST-IN-DRILLED-HOLE CONCRETE PILE (SIGN FOUNDATION) | M | 100 |
| 106 | 562002 | METAL (BARRIER MOUNTED SIGN) | KG | 3110 |
| 107 | 566011 | ROADSIDE SIGN - ONE POST | EA | 2 |
| 108 | 566012 | ROADSIDE SIGN - TWO POST | EA | 1 |
| 109 | 568001 | INSTALL SIGN (STRAP AND SADDLE BRACKET METHOD) | EA | 10 |
| 110 | 568007 | INSTALL SIGN OVERLAY | M2 | 5 |
| 111 | 568016 | INSTALL SIGN PANEL ON EXISTING FRAME | M2 | 58 |
| 112 | 620909 | 450 MM ALTERNATIVE PIPE CULVERT | M | 530 |
| 113 | 037822 | JACKED 450 MM REINFORCED CONCRETE PIPE (CLASS II) | M | 18 |
| 114 | 690160 | 300 MM CORRUGATED STEEL PIPE DOWNDRAIN (2.01 MM THICK) | M | 15 |
| 115 | 692088 | 300 MM ENTRANCE TAPER | EA | 3 |
| 116 | 703271 | 450 MM CORRUGATED STEEL PIPE RISER (2.01 MM THICK) | M | 9 |
| 117 | 705336 | 450 MM ALTERNATIVE FLARED END SECTION | EA | 5 |
| 118 | 721010 | ROCK SLOPE PROTECTION (BACKING NO. 1, METHOD B) | M3 | 5 |
| 119 (F) | 721810 | SLOPE PAVING (CONCRETE) | M3 | 121 |
| 120 | 037823 | ROCK SLOPE PROTECTION FABRIC (TYPE A) | M2 | 25 |

| Item No. | Item Code | Item Description | Unit of Measure | Estimated Quantity |
|---|---|---|---|---|
| 121 | 731502 | MINOR CONCRETE (MISCELLANEOUS CONSTRUCTION) | M3 | 23 |
| 122 (S-F) | 750001 | MISCELLANEOUS IRON AND STEEL | KG | 19 030 |
| 123 | 800391 | CHAIN LINK FENCE (TYPE CL-1.8) | M | 24 |
| 124 (S) | 839541 | TRANSITION RAILING (TYPE WB) | EA | 13 |
| 125 (S) | 832003 | METAL BEAM GUARD RAILING (WOOD POST) | M | 350 |
| 126 (S-F) | 833034 | CHAIN LINK RAILING (TYPE 7L) | M | 120 |
| 127 (S) | 839585 | ALTERNATIVE FLARED TERMINAL SYSTEM | EA | 12 |
| 128 | 037826 | CONCRETE BARRIER (TYPE 736S) | M | 4870 |
| 129 | 839706 | CONCRETE BARRIER (TYPE 60G) | M | 4980 |
| 130 (F) | 040070 | CONCRETE BARRIER (TYPE 60GA MODIFIED) | M | 57 |
| 131 (F) | 839707 | CONCRETE BARRIER (TYPE 60GA) | M | 510 |
| 132 | 839708 | CONCRETE BARRIER (TYPE 60GC) | M | 2470 |
| 133 | 839709 | CONCRETE BARRIER (TYPE 60GE) | M | 170 |
| 134 (F) | 839718 | CONCRETE BARRIER (TYPE 732R) | M | 783 |
| 135 | 037825 | CONCRETE BARRIER (TYPE 60GW MODIFY) | M | 2340 |
| 136 (F) | 839727 | CONCRETE BARRIER (TYPE 736 MODIFIED) | M | 687 |
| 137 (F) | 040071 | CONCRETE BARRIER (TYPE 736R MODIFIED) | M | 204 |
| 138 (S) | 840515 | THERMOPLASTIC PAVEMENT MARKING | M2 | 370 |
| 139 (S) | 840561 | 100 MM THERMOPLASTIC TRAFFIC STRIPE | M | 130 000 |
| 140 (S) | 840563 | 200 MM THERMOPLASTIC TRAFFIC STRIPE | M | 1700 |

| Item No. | Item Code | Item Description | Unit of Measure | Estimated Quantity |
|---|---|---|---|---|
| 141 (S) | 840574 | 200 MM THERMOPLASTIC TRAFFIC STRIPE (BROKEN 10.98 M - 3.66 M) | M | 4200 |
| 142 (S) | 840656 | PAINT TRAFFIC STRIPE (2-COAT) | M | 129 000 |
| 143 (S) | 840666 | PAINT PAVEMENT MARKING (2-COAT) | M2 | 65 |
| 144 (S) | 850101 | PAVEMENT MARKER (NON-REFLECTIVE) | EA | 34 000 |
| 145 (S) | 850111 | PAVEMENT MARKER (RETROREFLECTIVE) | EA | 21 200 |
| 146 (S) | 850122 | PAVEMENT MARKER (RETROREFLECTIVE-RECESSED) | EA | 300 |
| 147 (S) | 860796 | SPRINKLER CONTROL CONDUIT (BRIDGE) | M | 550 |
| 148 (S) | 860931 | TRAFFIC MONITORING STATION (LOCATION 1) | LS | LUMP SUM |
| 149 (S) | 860932 | TRAFFIC MONITORING STATION (LOCATION 2) | LS | LUMP SUM |
| 150 (S) | 861504 | MODIFY LIGHTING AND SIGN ILLUMINATION | LS | LUMP SUM |
| 151 (S) | 037826 | FIBER OPTIC SYSTEM | LS | LUMP SUM |
| 152 | 999990 | MOBILIZATION | LS | LUMP SUM |

**STATE OF CALIFORNIA**

**DEPARTMENT OF TRANSPORTATION**

---

# SPECIAL PROVISIONS

**Annexed to Contract No. 08-354804**

**SECTION 1. SPECIFICATIONS AND PLANS**

The work embraced herein shall conform to the provisions in the Standard Specifications dated July 1999, and the Standard Plans dated July 1999, of the Department of Transportation insofar as the same may apply, and these special provisions.

In case of conflict between the Standard Specifications and these special provisions, the special provisions shall take precedence over and shall be used in lieu of the conflicting portions.

# AMENDMENTS TO JULY 1999 STANDARD SPECIFICATIONS

**UPDATED JANUARY 31, 2005**

Amendments to the Standard Specifications set forth in these special provisions shall be considered as part of the Standard Specifications for the purposes set forth in Section 5-1.04, "Coordination and Interpretation of Plans, Standard Specifications and Special Provisions," of the Standard Specifications. Whenever either the term "Standard Specifications is amended" or the term "Standard Specifications are amended" is used in the special provisions, the text or table following the term shall be considered an amendment to the Standard Specifications. In case of conflict between such amendments and the Standard Specifications, the amendments shall take precedence over and be used in lieu of the conflicting portions.

**SECTION 1: DEFINITIONS AND TERMS**

Issue Date: January 31, 2005

Section 1-1.265, "Manual of Traffic Controls," of the Standard Specifications is amended to read:

**1-1.265 MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES**

- The Manual on Uniform Traffic Control Devices for Streets and Highways, 2003 Edition (MUTCD) is administered by the Federal Highway Administration.

Section 1, "Definitions and Terms," of the Standard Specifications is amended by adding the following section:

**1-1.266 MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES CALIFORNIA SUPPLEMENT**

- The MUTCD 2003 California Supplement (MUTCD California Supplement) is issued by the Department of Transportation to provide amendments to the MUTCD. The MUTCD and MUTCD California Supplement supersede the Department's Manual of Traffic Controls.

## SECTION 2: PROPOSAL REQUIREMENTS AND CONDITIONS

Issue Date: June 19, 2003

Section 2-1.03, "Examination of Plans, Specifications, Contract, and Site of Work," of the Standard Specifications is amended to read:

**2-1.03 Examination of Plans, Specifications, Contract, and Site of Work**

- The bidder shall examine carefully the site of the work contemplated, the plans and specifications, and the proposal and contract forms therefor. The submission of a bid shall be conclusive evidence that the bidder has investigated and is satisfied as to the general and local conditions to be encountered, as to the character, quality and scope of work to be performed, the quantities of materials to be furnished and as to the requirements of the proposal, plans, specifications and the contract.
- The submission of a bid shall also be conclusive evidence that the bidder is satisfied as to the character, quality and quantity of surface and subsurface materials or obstacles to be encountered insofar as this information was reasonably ascertainable from an inspection of the site and the records of exploratory work done by the Department as shown in the bid documents, as well as from the plans and specifications made a part of the contract.
- Where the Department has made investigations of site conditions including subsurface conditions in areas where work is to be performed under the contract, or in other areas, some of which may constitute possible local material sources, bidders or contractors may, upon written request, inspect the records of the Department as to those investigations subject to and upon the conditions hereinafter set forth.
- Where there has been prior construction by the Department or other public agencies within the project limits, records of the prior construction that are currently in the possession of the Department and which have been used by, or are known to, the designers and administrators of the project will be made available for inspection by bidders or contractors, upon written request, subject to the conditions hereinafter set forth. The records may include, but are not limited to, as-built drawings, design calculations, foundation and site studies, project reports and other data assembled in connection with the investigation, design, construction and maintenance of the prior projects.
- Inspection of the records of investigations and project records may be made at the office of the district in which the work is situated, or in the case of records of investigations related to structure work, at the Transportation Laboratory in Sacramento, California.
- When a log of test borings or other record of geotechnical data obtained by the Department's investigation of surface and subsurface conditions is included with the contract plans, it is furnished for the bidders' or Contractor's information and its use shall be subject to the conditions and limitations set forth in this Section 2-1.03.
- In some instances, information considered by the Department to be of possible interest to bidders or contractors has been compiled as "Materials Information." The use of the "Materials Information" shall be subject to the conditions and limitations set forth in this Section 2-1.03 and Section 6-2, "Local Materials."
- When cross sections are not included with the plans, but are available, bidders or contractors may inspect the cross sections and obtain copies for their use, at their expense.
- When cross sections are included with the contract plans, it is expressly understood and agreed that the cross sections do not constitute part of the contract, do not necessarily represent actual site conditions or show location, character, dimensions and details of work to be performed, and are included in the plans only for the convenience of bidders and their use is subject to the conditions and limitations set forth in this Section 2-1.03.
- When contour maps were used in the design of the project, the bidders may inspect those maps, and if available, they may obtain copies for their use.
- The availability or use of information described in this Section 2-1.03 is not to be construed in any way as a waiver of the provisions of the first paragraph in this Section 2-1.03 and bidders and contractors are cautioned to make independent investigations and examinations as they deem necessary to be satisfied as to conditions to be encountered in the performance of the work and, with respect to possible local material sources, the quality and quantity of material available from the property and the type and extent of processing that may be required in order to produce material conforming to the requirements of the specifications.
- The Department assumes no responsibility for conclusions or interpretations made by a bidder or contractor based on the information or data made available by the Department. The Department does not assume responsibility for representation made by its officers or agents before the execution of the contract concerning surface or subsurface conditions, unless that representation is expressly stated in the contract.
- No conclusions or interpretations made by a bidder or contractor from the information and data made available by the Department will relieve a bidder or contractor from properly fulfilling the terms of the contract.

## SECTION 5: CONTROL OF WORK

Issue Date: December 31, 2001

Section 5-1.02A, "Trench Excavation Safety Plans," of the Standard Specifications is amended to read:

**5-1.02A Excavation Safety Plans**

- The Construction Safety Orders of the Division of Occupational Safety and Health shall apply to all excavations. For all excavations 1.5 m or more in depth, the Contractor shall submit to the Engineer a detailed plan showing the design and details of the protective systems to be provided for worker protection from the hazard of caving ground during excavation. The detailed plan shall include any tabulated data and any design calculations used in the preparation of the plan. Excavation shall not begin until the detailed plan has been reviewed and approved by the Engineer.
- Detailed plans of protective systems for which the Construction Safety Orders require design by a registered professional engineer shall be prepared and signed by an engineer who is registered as a Civil Engineer in the State of California, and shall include the soil classification, soil properties, soil design calculations that demonstrate adequate stability of the protective system, and any other design calculations used in the preparation of the plan.
- No plan shall allow the use of a protective system less effective than that required by the Construction Safety Orders.
- If the detailed plan includes designs of protective systems developed only from the allowable configurations and slopes, or Appendices, contained in the Construction Safety Orders, the plan shall be submitted at least 5 days before the Contractor intends to begin excavation. If the detailed plan includes designs of protective systems developed from tabulated data, or designs for which design by a registered professional engineer is required, the plan shall be submitted at least 3 weeks before the Contractor intends to begin excavation.
- Attention is directed to Section 7-1.01E, "Trench Safety."

## SECTION 7: LEGAL RELATIONS AND RESPONSIBILITY

Issue Date: January 31, 2005

The eighth paragraph of Section 7-1.09, "Public Safety" of the Standard Specifications is amended to read:

- Signs, lights, flags, and other warning and safety devices and their use shall conform to the requirements set forth in Part 6 of the MUTCD and of the MUTCD California Supplement. Signs or other protective devices furnished and erected by the Contractor, at the Contractor's expense, as above provided, shall not obscure the visibility of, nor conflict in intent, meaning and function of either existing signs, lights and traffic control devices or any construction area signs and traffic control devices for which furnishing of, or payment for, is provided elsewhere in the specifications. Signs furnished and erected by the Contractor, at the Contractor's expense, shall be approved by the Engineer as to size, wording and location.

The fourteenth paragraph of Section 7-1.09, "Public Safety," of the Standard Specifications is amended to read:

- The Contractor shall notify the Engineer not less than 18 days and no more than 90 days prior to the anticipated start of an operation that will change the vertical or horizontal clearance available to public traffic (including shoulders).

The sixteenth paragraph of Section 7-1.09, "Public Safety," of the Standard Specifications is amended to read:

- When vertical clearance is temporarily reduced to 4.72 m or less, low clearance warning signs shall be placed in accordance with Part 2 of the MUTCD and the MUTCD California Supplement, and as directed by the Engineer. Signs shall conform to the dimensions, color, and legend requirements of the MUTCD, the MUTCD California Supplement, and these specifications except that the signs shall have black letters and numbers on an orange retroreflective background. W12-2P signs shall be illuminated so that the signs are clearly visible.

## SECTION 9: MEASUREMENT AND PAYMENT

Issue Date: November 17, 2004

Section 9-1.04, "Notice of Potential Claim," of the Standard Specifications is amended to read:

**9-1.04 NOTICE OF POTENTIAL CLAIM**

- It is the intention of this section that disputes between the parties arising under and by virtue of the contract be brought to the attention of the Engineer at the earliest possible time in order that the matters may be resolved, if possible, or other appropriate action promptly taken.
- Disputes will not be considered unless the Contractor has first complied with specified notice or protest requirements, including Section 4-1.03, "Changes," Section 5-1.116, "Differing Site Conditions," Section 8-1.06, "Time of Completion," Section 8-1.07, "Liquidated Damages," and Section 8-1.10, "Utility and Non-Highway Facilities."
- For disputes arising under and by virtue of the contract, including an act or failure to act by the Engineer, the Contractor shall provide a signed written initial notice of potential claim to the Engineer within 5 days from the date the dispute first arose. The initial notice of potential claim shall provide the nature and circumstances involved in the dispute which shall remain consistent through the dispute. The initial notice of potential claim shall be submitted on Form CEM-6201A furnished by the Department and shall be certified with reference to the California False Claims Act, Government Code Sections 12650-12655. The Contractor shall assign an exclusive identification number for each dispute, determined by chronological sequencing, based on the date of the dispute.
- The exclusive identification number for each dispute shall be used on the following corresponding documents:

A. Initial notice of potential claim.
B. Supplemental notice of potential claim.
C. Full and final documentation of potential claim.
D. Corresponding claim included in the Contractor's written statement of claims.

- The Contractor shall provide the Engineer the opportunity to examine the site of work within 5 days from the date of the initial notice of potential claim. The Contractor shall proceed with the performance of contract work unless otherwise specified or directed by the Engineer.
- Throughout the disputed work, the Contractor shall maintain records that provide a clear distinction between the incurred direct costs of disputed work and that of undisputed work. The Contractor shall allow the Engineer access to the Contractor's project records deemed necessary by the Engineer to evaluate the potential claim within 20 days of the date of the Engineer's written request.
- Within 15 days of submitting the initial notice of potential claim, the Contractor shall provide a signed supplemental notice of potential claim to the Engineer that provides the following information:

A. The complete nature and circumstances of the dispute which caused the potential claim.
B. The contract provisions that provide the basis of claim.
C. The estimated cost of the potential claim, including an itemized breakdown of individual costs and how the estimate was determined.
D. A time impact analysis of the project schedule that illustrates the effect on the scheduled completion date due to schedule changes or disruptions where a request for adjustment of contract time is made.

- The information provided in items A and B above shall provide the Contractor's complete reasoning for additional compensation or adjustments.
- The supplemental notice of potential claim shall be submitted on Form CEM-6201B furnished by the Department and shall be certified with reference to the California False Claims Act, Government Code Sections 12650-12655. The Engineer will evaluate the information presented in the supplemental notice of potential claim and provide a written response to the Contractor within 20 days of its receipt. If the estimated cost or effect on the scheduled completion date changes, the Contractor shall update information in items C and D above as soon as the change is recognized and submit this information to the Engineer.
- Within 30 days of the completion of work related to the potential claim, the Contractor shall provide the full and final documentation of potential claim to the Engineer that provides the following information:

A. A detailed factual narration of events fully describing the nature and circumstances that caused the dispute, including, but not limited to, necessary dates, locations, and items of work affected by the dispute.
B. The specific provisions of the contract that support the potential claim and a statement of the reasons these provisions support and provide a basis for entitlement of the potential claim.
C. When additional monetary compensation is requested, the exact amount requested calculated in conformance with Section 9-1.03, "Force Account Payment," or Section 8-1.09, "Right of Way Delays," including an itemized breakdown of individual costs. These costs shall be segregated into the following cost categories:

1. Labor – A listing of individuals, classifications, regular hours and overtime hours worked, dates worked, and other pertinent information related to the requested reimbursement of labor costs.
2. Materials – Invoices, purchase orders, location of materials either stored or incorporated into the work, dates materials were transported to the project or incorporated into the work, and other pertinent information related to the requested reimbursement of material costs.
3. Equipment – Listing of detailed description (make, model, and serial number), hours of use, dates of use and equipment rates. Equipment rates shall be at the applicable State rental rate as listed in the Department of Transportation publication entitled "Labor Surcharge and Equipment Rental Rates," in effect when the affected work related to the dispute was performed.
4. Other categories as specified by the Contractor or the Engineer.

D. When an adjustment of contract time is requested the following information shall be provided:

1. The specific dates for which contract time is being requested.
2. The specific reasons for entitlement to a contract time adjustment.
3. The specific provisions of the contract that provide the basis for the requested contract time adjustment.
4. A detailed time impact analysis of the project schedule. The time impact analysis shall show the effect of changes or disruptions on the scheduled completion date to demonstrate entitlement to a contract time adjustment.

E. The identification and copies of the Contractor's documents and the substance of oral communications that support the potential claim.

- The full and final documentation of the potential claim shall be submitted on Form CEM-6201C furnished by the Department and shall be certified with reference to the California False Claims Act, Government Code Sections 12650-12655.
- Pertinent information, references, arguments, and data to support the potential claim shall be included in the full and final documentation of potential claim. Information submitted subsequent to the full and final documentation submittal will not be considered. Information required in the full and final documentation of potential claim, as listed in items A to E above, that is not applicable to the dispute may be exempted as determined by the Engineer. No full and final documentation of potential claim will be considered that does not have the same nature and circumstances, and basis of claim as those specified on the initial and supplemental notices of potential claim.
- The Engineer will evaluate the information presented in the full and final documentation of potential claim and provide a written response to the Contractor within 30 days of its receipt unless otherwise specified. The Engineer's receipt of the full and final documentation of potential claim shall be evidenced by postal receipt or the Engineer's written receipt if delivered by hand. If the full and final documentation of potential claim is submitted by the Contractor after acceptance of the work by the Director, the Engineer need not provide a written response.
- Provisions in this section shall not apply to those claims for overhead costs and administrative disputes that occur after issuance of the proposed final estimate. Administrative disputes are disputes of administrative deductions or retentions, contract item quantities, contract item adjustments, interest payments, protests of contract change orders as provided in Section 4-1.03A, "Procedure and Protest," and protests of the weekly statement of working days as provided in Section 8-1.06, "Time of Completion." Administrative disputes that occur prior to issuance of the proposed final estimate shall follow applicable requirements of this section. Information listed in the supplemental notice and full and final documentation of potential claim that is not applicable to the administrative dispute may be exempted as determined by the Engineer.
- Unless otherwise specified in the special provisions, the Contractor may pursue the administrative claim process pursuant to Section 9-1.07B, "Final Payment and Claims," for any potential claim found by the Engineer to be without merit.
- Failure of the Contractor to conform to specified dispute procedures shall constitute a failure to pursue diligently and exhaust the administrative procedures in the contract, and is deemed as the Contractor's waiver of the potential claim and a waiver of the right to a corresponding claim for the disputed work in the administrative claim process in conformance with Section 9-1.07B, "Final Payment of Claims," and shall operate as a bar to arbitration pursuant to Section 10240.2 of the California Public Contract Code.

Section 9-1.07B, "Final Payment and Claims," of the Standard Specifications is amended to read:

**9-1.07B Final Payment and Claims**

- After acceptance by the Director, the Engineer will make a proposed final estimate in writing of the total amount payable to the Contractor, including an itemization of the total amount, segregated by contract item quantities, extra work and other bases for payment, and shall also show each deduction made or to be made for prior payments and amounts to be kept

or retained under the provisions of the contract. Prior estimates and payments shall be subject to correction in the proposed final estimate. The Contractor shall submit written approval of the proposed final estimate or a written statement of claims arising under or by virtue of the contract so that the Engineer receives the written approval or statement of claims no later than close of business of the thirtieth day after receiving the proposed final estimate. If the thirtieth day falls on a Saturday, Sunday or legal holiday, then receipt of the written approval or statement of claims by the Engineer shall not be later than close of business of the next business day. The Contractor's receipt of the proposed final estimate shall be evidenced by postal receipt. The Engineer's receipt of the Contractor's written approval or statement of claims shall be evidenced by postal receipt or the Engineer's written receipt if delivered by hand.

- On the Contractor's approval, or if the Contractor files no claim within the specified period of 30 days, the Engineer will issue a final estimate in writing in conformance with the proposed final estimate submitted to the Contractor, and within 30 days thereafter the State will pay the entire sum so found to be due. That final estimate and payment thereon shall be conclusive and binding against both parties to the contract on all questions relating to the amount of work done and the compensation payable therefor, except as otherwise provided in Sections 9-1.03C, "Records," and 9-1.09, "Clerical Errors."
- If the Contractor within the specified period of 30 days files claims, the Engineer will issue a semifinal estimate in conformance with the proposed final estimate submitted to the Contractor and within 30 days thereafter the State will pay the sum found to be due. The semifinal estimate and corresponding payment shall be conclusive and binding against both parties to the contract on each question relating to the amount of work done and the compensation payable therefor, except insofar as affected by the claims filed within the time and in the manner required hereunder and except as otherwise provided in Sections 9-1.03C, "Records," and 9-1.09, "Clerical Errors."
- Except for claims for overhead costs and administrative disputes that occur after issuance of the proposed final estimate, the Contractor shall only provide the following two items of information for each claim:

A. The exclusive identification number that corresponds to the supporting full and final documentation of potential claim.
B. The final amount of requested additional compensation.

- If the final amount of requested additional compensation is different than the amount of requested compensation included in the full and final documentation of potential claim, the Contractor shall provide in the written statement of claims the reasons for the changed amount, the specific provisions of the contract which support the changed amount, and a statement of the reasons the provisions support and provide a basis for the changed amount. If the Contractor's claim fails to provide an exclusive identification number or if there is a disparity in the provided exclusive identification number, the Engineer will notify the Contractor of the omission or disparity. The Contractor shall have 15 days after receiving notification from the Engineer to correct the omission or disparity. If after the 15 days has elapsed, there is still an omission or disparity of the exclusive identification number assigned to the claim, the Engineer will assign the number. No claim will be considered that has any of the following deficiencies:

A. The claim does not have the same nature, circumstances, and basis as the corresponding full and final documentation of potential claim.
B. The claim does not have a corresponding full and final documentation of potential claim.
C. The claim was not included in the written statement of claims.
D. The Contractor did not comply with applicable notice or protest requirements of Sections 4-1.03, "Changes," 5-1.116, "Differing Site Condition," 8-1.06, "Time of Completion," 8-1.07, "Liquidated Damages," 8-1.10, "Utility and Non-Highway Facilities," and 9-1.04, "Notice of Potential Claim."

- Administrative disputes that occur after issuance of the proposed final estimate shall be included in the Contractor's written statement of claims in sufficient detail to enable the Engineer to ascertain the basis and amounts of those claims.
- The Contractor shall keep full and complete records of the costs and additional time incurred for work for which a claim for additional compensation is made. The Engineer or designated claim investigators or auditors shall have access to those records and any other records as may be required by the Engineer to determine the facts or contentions involved in the claims. Failure to permit access to those records shall be sufficient cause for denying the claims.
- The written statement of claims submitted by the Contractor shall be accompanied by a notarized certificate containing the following language:

Under the penalty of law for perjury or falsification and with specific reference to the California False Claims Act, Government Code Section 12650 et. seq., the undersigned,

_____ .
*(name)*

_____ *of*
*(title)*

_____ .
*(company)*

hereby certifies that the claim for the additional compensation and time, if any, made herein for the work on this contract is a true statement of the actual costs incurred and time sought, and is fully documented and supported under the contract between parties.

Dated _____

/s/ _____

Subscribed and sworn before me this _____ day

of _____ .

_____
*(Notary Public)*
My Commission
Expires _____

- Failure to submit the notarized certificate will be sufficient cause for denying the claim.
- Claims for overhead type expenses or costs, in addition to being certified as stated above, shall be supported and accompanied by an audit report of an independent Certified Public Accountant. Omission of a supporting audit report of an independent Certified Public Accountant shall result in denial of the claim and shall operate as a bar to arbitration, as to the claim, in conformance with the requirements in Section 10240.2 of the California Public Contract Code. Claims for overhead type expenses or costs shall be subject to audit by the State at its discretion. The costs of performing an audit examination and submitting the report shall be borne by the Contractor. The Certified Public Accountant's audit examination shall be performed in conformance with the requirements of the American Institute of Certified Public Accountants Attestation Standards. The audit examination and report shall depict the Contractor's project and company-wide financial records and shall specify the actual overall average daily rates for both field and home office overhead for the entire duration of the project, and whether the costs have been properly allocated. The rates of field and home office overhead shall exclude unallowable costs as determined in Title 48 of the Federal Acquisition Regulations, Chapter 1, Part 31. The audit examination and report shall determine if the rates of field and home office overhead are:

A. Allowable in conformance with the requirements in Title 48 of the Federal Acquisition Regulations, Chapter 1, Part 31.
B. Adequately supported by reliable documentation.
C. Related solely to the project under examination.

- Costs or expenses incurred by the State in reviewing or auditing claims that are not supported by the Contractor's cost accounting or other records shall be deemed to be damages incurred by the State within the meaning of the California False Claims Act.
- If the Engineer determines that a claim requires additional analysis, the Engineer will schedule a board of review meeting. The Contractor shall meet with the review board or person and make a presentation in support of the claim. Attendance by the Contractor at the board of review meeting shall be mandatory.
- The District Director of the District that administered the contract will make the final determination of any claims which remain in dispute after completion of claim review by the Engineer or board of review meeting.

The final determination of claims will be sent to the Contractor by hand delivery or deposit in the U.S. mail. The Engineer will then make and issue the Engineer's final estimate in writing and within 30 days thereafter the State will pay the entire sum, if any, found due thereon. That final estimate shall be conclusive and binding against both parties to the contract on all questions relating to the amount of work done and the compensation payable therefor, except as otherwise provided in Sections 9-1.03C, "Records," and 9-1.09, "Clerical Errors."

• Failure of the Contractor to conform to the specified dispute procedures shall constitute a failure to pursue diligently and exhaust the administrative procedures in the contract and shall operate as a bar to arbitration in conformance with the requirements in Section 10240.2 of the California Public Contract Code.

## SECTION 12: CONSTRUCTION AREA TRAFFIC CONTROL DEVICES

Issue Date: November 2, 2004

The second paragraph of Section 12-1.01, "Description," of the Standard Specifications is amended to read:

• Attention is directed to Part 6 of the MUTCD and of the MUTCD California Supplement. Nothing in this Section 12 is to be construed as to reduce the minimum standards in these manuals.

Section 12-2.01, "Flaggers," of the Standard Specifications is amended to read:

• Flaggers while on duty and assigned to traffic control or to give warning to the public that the highway is under construction and of any dangerous conditions to be encountered as a result thereof, shall perform their duties and shall be provided with the necessary equipment in conformance with Part 6 of the MUTCD and of the MUTCD California Supplement. The equipment shall be furnished and kept clean and in good repair by the Contractor at the Contractor's expense.

The first paragraph of Section 12-3.01, "General," of the Standard Specifications is amended to read:

• In addition to the requirements in Part 6 of the MUTCD and of the MUTCD California Supplement, all devices used by the Contractor in the performance of the work shall conform to the provisions in this Section 12-3.

The first paragraph of Section 12-3.06, "Construction Area Signs," of the Standard Specifications is amended to read:

• The term "Construction Area Signs" shall include all temporary signs required for the direction of public traffic through or around the work during construction. Construction area signs are shown in or referred to in Part 6 of the MUTCD and of the MUTCD California Supplement.

The fourth paragraph of Section 12-3.06, "Construction Area Signs," of the Standard Specifications is amended to read:

• All construction area signs shall conform to the dimensions, color and legend requirements of the plans, Part 6 of the MUTCD, Part 6 of the MUTCD California Supplement, and these specifications. All sign panels shall be the product of a commercial sign manufacturer, and shall be as specified in these specifications.

The eighth paragraph of Section 12-3.06, "Construction Area Signs," of the Standard Specifications is amended to read:

• Used signs with the specified sheeting material will be considered satisfactory if they conform to the requirements for visibility and legibility and the colors conform to the requirements in Part 6 of the MUTCD and of the MUTCD California Supplement. A significant difference between day and nighttime retroreflective color will be grounds for rejecting signs.

Section 12-3.06A, "Stationary Mounted Signs," of the Standard Specifications is amended by deleting the third, fourth, fifth, and sixth paragraphs.

## SECTION 19: EARTHWORK

Issue Date: December 31, 2001

The third paragraph of Section 19-1.02, "Preservation of Property," of the Standard Specifications is amended to read:

• In addition to the provisions in Sections 5-1.02, "Plans and Working Drawings," and 5-1.02A, "Excavation Safety Plans," detailed plans of the protective systems for excavations on or affecting railroad property will be reviewed for adequacy of protection provided for railroad facilities, property, and traffic. These plans shall be submitted at least 9 weeks

before the Contractor intends to begin excavation requiring the protective systems. Approval by the Engineer of the detailed plans for the protective systems will be contingent upon the plans being satisfactory to the railroad company involved.

## SECTION 42: GROOVE AND GRIND PAVEMENT

Issue Date: December 31, 2001

The last sentence of the first subparagraph of the third paragraph in Section 42-2.02, "Construction," of the Standard Specifications is amended to read:

- After grinding has been completed, the pavement shall conform to the straightedge and profile requirements specified in Section 40-1.10, "Final Finishing."

## SECTION 49: PILING

Issue Date: November 2, 2004

The first paragraph in Section 49-1.03, "Determination of Length," of the Standard Specifications is amended to read:

- Foundation piles of any material shall be of such length as is required to obtain the specified penetration, and to extend into the cap or footing block as shown on the plans, or specified in the special provisions.

The fourth paragraph in Section 49-1.03, "Determination of Length," of the Standard Specifications is amended to read:

- Modification to the specified installation methods and specified pile tip elevation will not be considered at locations where tension or lateral load demands control design pile tip elevations or when the plans state that specified pile tip elevation shall not be revised.

The sixth and seventh paragraphs in Section 49-1.03, "Determination of Length," of the Standard Specifications are amended to read:

- Indicator compression pile load testing shall conform to the requirements in ASTM Designation: D 1143. The pile shall sustain the first compression test load applied which is equal to the nominal resistance in compression, as shown on the plans, with no more than 13 mm total vertical movement at the top of the pile measured relative to the top of the pile prior to the start of compression load testing.
- Indicator tension pile load testing shall conform to the requirements in ASTM Designation: D 3689. The loading apparatus described as "Load Applied to Pile by Hydraulic Jack(s) Acting at One End of Test Beam(s) Anchored to the Pile" shall not be used. The pile shall sustain the first tension test load applied which is equal to the nominal resistance in tension, as shown on the plans, with no more than 13 mm total vertical movement at the top of the pile measured relative to the top of the pile prior to the start of tension load testing.

The ninth paragraph in Section 49-1.03, "Determination of Length," of the Standard Specifications is amended to read:

- For driven piling, the Contractor shall furnish piling of sufficient length to obtain the specified tip elevation shown on the plans or specified in the special provisions. For cast-in-drilled-hole concrete piling, the Contractor shall construct piling of such length to develop the nominal resistance in compression and to obtain the specified tip elevation shown on the plans or specified in the special provisions.

The tenth paragraph in Section 49-1.03, "Determination of Length," of the Standard Specifications is deleted.

The fourth paragraph in Section 49-1.04, "Load Test Piles," of the Standard Specifications is amended to read:

- Load test piles and anchor piles which are not to be incorporated in the completed structure shall be removed in conformance with the provisions in Section 15-4.02, "Removal Methods," and the remaining holes shall be backfilled with earth or other suitable material approved by the Engineer.

The fifth paragraph in Section 49-1.04, "Load Test Piles," of the Standard Specifications is amended to read:

- Load test anchorages in piles used as anchor piles shall conform to the following requirements:

A. High strength threaded steel rods shall conform to the provisions for bars in Section 50-1.05, "Prestressing Steel," except Type II bars shall be used.
B. High strength steel plates shall conform to the requirements in ASTM Designation: A 709/A 709M, Grade 345.
C. Anchor nuts shall conform to the provisions in the second paragraph in Section 50-1.06, "Anchorages and Distribution."

The first paragraph in Section 49-1.05, "Driving Equipment," of the Standard Specifications is amended to read:

- Driven piles shall be installed with impact hammers that are approved in writing by the Engineer. Impact hammers shall be steam, hydraulic, air or diesel hammers. Impact hammers shall develop sufficient energy to drive the piles at a penetration rate of not less than 3 mm per blow at the specified nominal resistance.

The seventh paragraph in Section 49-1.05, "Driving Equipment," of the Standard Specifications is amended to read:

- When necessary to obtain the specified penetration and when authorized by the Engineer, the Contractor may supply and operate one or more water jets and pumps, or furnish the necessary drilling apparatus and drill holes not greater than the least dimension of the pile to the proper depth and drive the piles therein. Jets shall not be used at locations where the stability of embankments or other improvements would be endangered. In addition, for steel piles, steel shells, or steel casings, when necessary to obtain the specified penetration or to prevent damage to the pile during installation, the Contractor shall provide special driving tips or heavier pile sections or take other measures as approved by the Engineer.

- The use of followers or underwater hammers for driving piles will be permitted if authorized in writing by the Engineer. When a follower or underwater hammer is used, its efficiency shall be verified by furnishing the first pile in each bent or footing sufficiently long and driving the pile without the use of a follower or underwater hammer.

The second paragraph in Section 49-1.07, "Driving," of the Standard Specifications is amended to read:

- Timber piles shall be fresh-headed and square and when permitted by the Engineer, the heads of the piles may be protected by means of heavy steel or wrought iron rings. During driving operations timber piling shall be restrained from lateral movement at intervals not to exceed 6 m over the length between the driving head and the ground surface. During driving operations, the timber pile shall be kept moving by continuous operation of the hammer. When the blow count exceeds either 2 times the blow count required in 300 mm, or 3 times the blow count required in 75 mm for the nominal resistance as shown on the plans, computed in conformance with the provisions in Section 49-1.08, "Pile Driving Acceptance Criteria," additional aids shall be used to obtain the specified penetration. These aids may include the use of water jets or drilling, where permitted, or the use of a larger hammer employing a heavy ram striking with a low velocity.

Section 49-1.08, "Bearing Value and Penetration," of the Standard Specifications is amended to read:

**49-1.08 PILE DRIVING ACCEPTANCE CRITERIA**

- Except for piles to be load tested, driven piles shall be driven to a value of not less than the nominal resistance shown on the plans unless otherwise specified in the special provisions or permitted in writing by the Engineer. In addition, when a pile tip elevation is specified, driven piles shall penetrate at least to the specified tip elevation, unless otherwise permitted in writing by the Engineer. Piles to be load tested shall be driven to the specified tip elevation.
- When the pile nominal resistance is omitted from the plans or the special provisions, timber piles shall be driven to a nominal resistance of 800 kN, and steel and concrete piles shall be driven to a nominal resistance of 1250 kN.
- The nominal resistance for driven piles shall be determined from the following formula in which "$R_u$" is the nominal resistance in kilonewtons, "$E_r$" is the manufacturer's rating for joules of energy developed by the hammer at the observed field drop height, and "N" is the number of hammer blows in the last 300 millimeters. (maximum value to be used for N is 100):

$$R_u = (7 * (E_r)^{1/2} * \log_{10} (0.83 * N)) - 550$$

The first paragraph in Section 49-2.03, "Requirements," of the Standard Specifications is amended to read:

• When preservative treatment of timber piles is required by the plans or specified in the special provisions, the treatment shall conform to the provisions in Section 58, "Preservative Treatment of Lumber, Timber and Piling," and the applicable AWPA Use Category.

The first paragraph in Section 49-2.04, "Treatment of Pile Heads," of the Standard Specifications is amended to read:

A. An application of wood preservative conforming to the provisions in Section 58-1.04, "Wood Preservative for Manual Treatment," shall first be applied to the head of the pile and a protective cap shall then be built up by applying alternate layers of loosely woven fabric and hot asphalt or tar similar to membrane waterproofing, using 3 layers of asphalt or tar and 2 layers of fabric. The fabric shall measure at least 150 mm more in each direction than the diameter of the pile and shall be turned down over the pile and the edges secured by binding with 2 turns of No. 10 galvanized wire. The fabric shall be wired in advance of the application of the final layer of asphalt or tar, which shall extend down over the wiring.
B. The sawed surface shall be covered with 3 applications of a hot mixture of 60 percent creosote and 40 percent roofing pitch, or thoroughly brushcoated with 3 applications of hot creosote and covered with hot roofing pitch. A covering of 3.50-mm nominal thickness galvanized steel sheet shall be placed over the coating and bent down over the sides of each pile to shed water.

Section 49-3.01, "Description," of the Standard Specifications is amended by deleting the fifth paragraph.

The sixth and seventh paragraphs in Section 49-3.01, "Description," of the Standard Specifications are amended to read:

• Except for precast prestressed concrete piles in a corrosive environment, lifting anchors used in precast prestressed concrete piles shall be removed, and the holes filled in conformance with the provisions in Section 51-1.18A, "Ordinary Surface Finish."
• Lifting anchors used in precast prestressed concrete piles in a corrosive environment shall be removed to a depth of at least 25 mm below the surface of the concrete, and the resulting hole shall be filled with epoxy adhesive before the piles are delivered to the job site. The epoxy adhesive shall conform to the provisions in Sections 95-1, "General," and 95-2.01, "Binder (Adhesive), Epoxy Resin Base (State Specification 8040-03)."

The first and second paragraphs in Section 49-4.01, "Description," of the Standard Specifications are amended to read:

• Cast-in-place concrete piles shall consist of one of the following:

A. Steel shells driven permanently to the required nominal resistance and penetration and filled with concrete.
B. Steel casings installed permanently to the required penetration and filled with concrete.
C. Drilled holes filled with concrete.
D. Rock sockets filled with concrete.

• The drilling of holes shall conform to the provisions in these specifications. Concrete filling for cast-in-place concrete piles is designated by compressive strength and shall have a minimum 28-day compressive strength of 25 MPa. At the option of the Contractor, the combined aggregate grading for the concrete shall be either the 25-mm maximum grading, the 12.5-mm maximum grading, or the 9.5-mm maximum grading. Concrete shall conform to the provisions in Section 90, "Portland Cement Concrete," and Section 51, "Concrete Structures." Reinforcement shall conform to the provisions in Section 52, "Reinforcement."

The fourth paragraph in Section 49-4.03, "Drilled Holes," of the Standard Specifications is amended to read:

• After placing reinforcement and prior to placing concrete in the drilled hole, if caving occurs or deteriorated foundation material accumulates on the bottom of the hole, the bottom of the drilled hole shall be cleaned. The Contractor shall verify that the bottom of the drilled hole is clean.

The first and second paragraphs in Section 49-4.04, "Steel Shells," of the Standard Specifications are amended to read:

• Steel shells shall be sufficiently watertight to exclude water during the placing of concrete. The shells may be cylindrical or tapered, step-tapered, or a combination of either, with cylindrical sections.

The first paragraph in Section 49-4.05, "Inspection," of the Standard Specifications is amended to read:

• After being driven and prior to placing reinforcement and concrete therein, the steel shells shall be examined for collapse or reduced diameter at any point. Any shell which is improperly driven or broken or shows partial collapse to such an extent as to materially decrease its nominal resistance will be rejected. Rejected shells shall be removed and replaced, or a new shell shall be driven adjacent to the rejected shell. Rejected shells which cannot be removed shall be filled with concrete by the Contractor at the Contractor's expense. When a new shell is driven to replace a rejected shell, the Contractor, at the Contractor's expense, shall enlarge the footing as determined necessary by the Engineer.

The third paragraph in Section 49-5.01, "Description," of the Standard Specifications is amended to read:

• Steel pipe piles shall conform to the following requirements:

1. Steel pipe piles less than 360 mm in diameter shall conform to the requirements in ASTM Designation: A 252, Grade 2 or 3.
2. Steel pipe piles 360 mm and greater in diameter shall conform to the requirements in ASTM Designation: A 252, Grade 3.
3. Steel pipe piles shall be of the nominal diameter and nominal wall thickness shown on the plans or specified in the special provisions.
4. The carbon equivalency (CE) of steel for steel pipe piles, as defined in AWS D 1.1, Section XI5.1, shall not exceed 0.45.
5. The sulfur content of steel for steel pipe piles shall not exceed 0.05-percent.
6. Seams in steel pipe piles shall be complete penetration welds.

The first paragraph in Section 49-6.01, "Measurement," of the Standard Specifications is amended to read:

• The length of timber, steel, and precast prestressed concrete piles, and of cast-in-place concrete piles consisting of driven shells filled with concrete, shall be the greater of the following:

A. The total length in place in the completed work, measured along the longest side, from the tip of the pile to the plane of pile cut-off.
B. The length measured along the longest side, from the tip elevation shown on the plans or the tip elevation ordered by the Engineer, to the plane of pile cut-off.

The third paragraph in Section 49-6.02, "Payment," of the Standard Specifications is amended to read:

• The contract price paid per meter for cast-in-drilled-hole concrete piling shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all work involved in drilling holes, disposing of material resulting from drilling holes, temporarily casing holes and removing water when necessary, furnishing and placing concrete and reinforcement, and constructing reinforced concrete extensions, complete in place, to the required penetration, as shown on the plans, as specified in these specifications and in the special provisions, and as directed by the Engineer.

The seventh paragraph in Section 49-6.02, "Payment," of the Standard Specifications is amended to read

• The contract unit price paid for drive pile shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in driving timber, concrete and steel piles, driving steel shells for cast-in-place concrete piles, placing filling materials for cast-in-place concrete piles and cutting off piles, all complete in place to the required nominal resistance and penetration as shown on the plans and as specified in these specifications and the special provisions, and as directed by the Engineer.

The ninth paragraph in Section 49-6.02, "Payment," of the Standard Specifications is amended to read:

• Full compensation for all jetting, drilling, providing special driving tips or heavier sections for steel piles or shells, or other work necessary to obtain the specified penetration and nominal resistance of the piles, for predrilling holes through embankment and filling the space remaining around the pile with sand or pea gravel, for disposing of material resulting from jetting, drilling or predrilling holes, and for all excavation and backfill involved in constructing concrete extensions as shown on the plans, and as specified in these specifications and the special provisions, and as directed by the Engineer shall be considered as included in the contract unit price paid for drive pile or in the contract price paid per meter for cast-in-drilled-hole concrete piling, and no additional compensation will be allowed therefor.

Section 49-6.02, "Payment," of the Standard Specifications is amended by adding the following paragraphs:

Full compensation for furnishing and placing additional testing reinforcement, for load test anchorages, and for cutting off test piles, shall be considered as included in the contract price paid for piling of the type or class shown in the Engineer's Estimate, and no additional compensation will be allowed.

No additional compensation or extension of time will be made for additional foundation investigation, installation and testing of indicator piling, cutting off piling and restoring the foundation investigation and indicator pile sites, and review of request by the Engineer

## SECTION 50: PRESTRESSING CONCRETE

Issue Date: November 18, 2002

Section 50-1.02, "Drawings," of the Standard Specifications is amended by adding the following paragraph after the second paragraph:

- Each working drawing submittal shall consist of plans for a single bridge or portion thereof. For multi-frame bridges, each frame shall require a separate working drawing submittal.

Section 50-1.05, "Prestressing Steel," of the Standard Specifications is amended to read:

- Prestressing steel shall be high-tensile wire conforming to the requirements in ASTM Designation: A 421, including Supplement I; high-tensile seven-wire strand conforming to the requirements in ASTM Designation: A 416; or uncoated high-strength steel bars conforming to the requirements in ASTM Designation: A 722, including all supplementary requirements. The maximum mass requirement of ASTM Designation: A 722 will not apply.
- In addition to the requirements of ASTM Designation: A 722, for deformed bars, the reduction of area shall be determined from a bar from which the deformations have been removed. The bar shall be machined no more than necessary to remove the deformations over a length of 300 mm, and reduction will be based on the area of the machined portion.
- In addition to the requirements specified herein, epoxy-coated seven-wire prestressing steel strand shall be grit impregnated and filled in conformance with the requirements in ASTM Designation: A 882/A 882M, including Supplement I, and the following:

A. The coating material shall be on the Department's list of approved coating materials for epoxy-coated strand, available from the Transportation Laboratory.
B. The film thickness of the coating after curing shall be 381 µm to 1143 µm.
C. Prior to coating the strand, the Contractor shall furnish to the Transportation Laboratory a representative 230-g sample from each batch of epoxy coating material to be used. Each sample shall be packaged in an airtight container identified with the manufacturer's name and batch number.
D. Prior to use of the epoxy-coated strand in the work, written certifications referenced in ASTM Designation: A 882/A 882M, including a representative load-elongation curve for each size and grade of strand to be used and a copy of the quality control tests performed by the manufacturer, shall be furnished to the Engineer.
E. In addition to the requirements in Section 50-1.10, "Samples for Testing," four 1.5-m long samples of coated strand and one 1.5-m long sample of uncoated strand of each size and reel shall be furnished to the Engineer for testing. These samples, as selected by the Engineer, shall be representative of the material to be used in the work.
F. Epoxy-coated strand shall be cut using an abrasive saw.
G. All visible damage to coatings caused by shipping and handling, or during installation, including cut ends, shall be repaired in conformance with the requirements in ASTM Designation: A 882/A 882M. The patching material shall be furnished by the manufacturer of the epoxy powder and shall be applied in conformance with the manufacturer's written recommendations. The patching material shall be compatible with the original epoxy coating material and shall be inert in concrete.

- All bars in any individual member shall be of the same grade, unless otherwise permitted by the Engineer.
- When bars are to be extended by the use of couplers, the assembled units shall have a tensile strength of not less than the manufacturer's minimum guaranteed ultimate tensile strength of the bars. Failure of any one sample to meet this requirement will be cause for rejection of the heat of bars and lot of couplers. The location of couplers in the member shall be subject to approval by the Engineer.

- Wires shall be straightened if necessary to produce equal stress in all wires or wire groups or parallel lay cables that are to be stressed simultaneously or when necessary to ensure proper positioning in the ducts.
- Where wires are to be button-headed, the buttons shall be cold formed symmetrically about the axes of the wires. The buttons shall develop the minimum guaranteed ultimate tensile strength of the wire. No cold forming process shall be used that causes indentations in the wire. Buttonheads shall not contain wide open splits, more than 2 splits per head, or splits not parallel with the axis of the wire.
- Prestressing steel shall be protected against physical damage and rust or other results of corrosion at all times from manufacture to grouting or encasing in concrete. Prestressing steel that has sustained physical damage at any time shall be rejected. The development of visible rust or other results of corrosion shall be cause for rejection, when ordered by the Engineer.
- Epoxy-coated prestressing steel strand shall be covered with an opaque polyethylene sheeting or other suitable protective material to protect the strand from exposure to sunlight, salt spray, and weather. For stacked coils, the protective covering shall be draped around the perimeter of the stack. The covering shall be adequately secured; however, it should allow for air circulation around the strand to prevent condensation under the covering. Epoxy-coated strand shall not be stored within 300 m of ocean or tidal water for more than 2 months.
- Prestressing steel shall be packaged in containers or shipping forms for the protection of the steel against physical damage and corrosion during shipping and storage. Except for epoxy-coated strand, a corrosion inhibitor which prevents rust or other results of corrosion, shall be placed in the package or form, or shall be incorporated in a corrosion inhibitor carrier type packaging material, or when permitted by the Engineer, may be applied directly to the steel. The corrosion inhibitor shall have no deleterious effect on the steel or concrete or bond strength of steel to concrete. Packaging or forms damaged from any cause shall be immediately replaced or restored to original condition.
- The shipping package or form shall be clearly marked with a statement that the package contains high-strength prestressing steel, and the type of corrosion inhibitor used, including the date packaged.
- Prestressing steel for post-tensioning which is installed in members prior to placing and curing of the concrete, and which is not epoxy-coated, shall be continuously protected against rust or other results of corrosion, until grouted, by means of a corrosion inhibitor placed in the ducts or applied to the steel in the duct. The corrosion inhibitor shall conform to the provisions specified herein.
- When steam curing is used, prestressing steel for post-tensioning shall not be installed until the steam curing is completed.
- Water used for flushing ducts shall contain either quick lime (calcium oxide) or slaked lime (calcium hydroxide) in the amount of 0.01-kg/L. Compressed air used to blow out ducts shall be oil free.
- When prestressing steel for post-tensioning is installed in the ducts after completion of concrete curing, and if stressing and grouting are completed within 10 days after the installation of the prestressing steel, rust which may form during those 10 days will not be cause for rejection of the steel. Prestressing steel installed, tensioned, and grouted in this manner, all within 10 days, will not require the use of a corrosion inhibitor in the duct following installation of the prestressing steel. Prestressing steel installed as above but not grouted within 10 days shall be subject to all the requirements in this section pertaining to corrosion protection and rejection because of rust. The requirements in this section pertaining to tensioning and grouting within 10 days shall not apply to epoxy-coated prestressing steel strand.
- Any time prestressing steel for pretensioning is placed in the stressing bed and is exposed to the elements for more than 36 hours prior to encasement in concrete, adequate measures shall be taken by the Contractor, as approved by the Engineer, to protect the steel from contamination or corrosion.
- After final fabrication of the seven-wire prestressing steel strand, no electric welding of any form shall be performed on the prestressing steel. Whenever electric welding is performed on or near members containing prestressing steel, the welding ground shall be attached directly to the steel being welded.
- Pretensioned prestressing steel shall be cut off flush with the end of the member. For epoxy-coated prestressing steel, only abrasive saws shall be used to cut the steel. The exposed ends of the prestressing steel and a 25-mm strip of adjoining concrete shall be cleaned and painted. Cleaning shall be by wire brushing or abrasive blast cleaning to remove all dirt and residue on the metal or concrete surfaces. Immediately after cleaning, the surfaces shall be covered with one application of unthinned zinc-rich primer (organic vehicle type) conforming to the provisions in Section 91, "Paint," except that 2 applications shall be applied to surfaces which will not be covered by concrete or mortar. Aerosol cans shall not be used. The paint shall be thoroughly mixed at the time of application and shall be worked into any voids in the prestressing tendons.

The thirteenth paragraph in Section 50-1.08, "Prestressing," of the Standard Specifications is amended to read:

- Prestressing steel in pretensioned members shall not be cut or released until the concrete in the member has attained a compressive strength of not less than the value shown on the plans or 28 MPa, whichever is greater. In addition to these

concrete strength requirements, when epoxy-coated prestressing steel strand is used, the steel shall not be cut or released until the temperature of the concrete surrounding the strand is less than 65°C, and falling.

The fifth paragraph in Section 50-1.10, "Samples for Testing," of the Standard Specifications is amended to read:

• The following samples of materials and tendons, selected by the Engineer from the prestressing steel at the plant or jobsite, shall be furnished by the Contractor to the Engineer well in advance of anticipated use:

A. For wire or bars, one 2-m long sample and for strand, one 1.5-m long sample, of each size shall be furnished for each heat or reel.
B. For epoxy-coated strand, one 1.5-m long sample of uncoated strand of each size shall be furnished for each reel.
C. If the prestressing tendon is a bar, one 2-m long sample shall be furnished and in addition, if couplers are to be used with the bar, two 1.25-m long samples of bar, equipped with one coupler and fabricated to fit the coupler, shall be furnished.

The second paragraph in Section 50-1.11, "Payment," of the Standard Specifications is amended to read:

• The contract lump sum prices paid for prestressing cast-in-place concrete of the types listed in the Engineer's Estimate shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all work involved in furnishing, placing, and tensioning the prestressing steel in cast-in-place concrete structures, complete in place, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

## SECTION 51: CONCRETE STRUCTURES

Issue Date: January 31, 2005

The eleventh paragraph in Section 51-1.05, "Forms," of the Standard Specifications is amended to read:

• Form panels for exposed surfaces shall be furnished and placed in uniform widths of not less than 0.9-m and in uniform lengths of not less than 1.8 m, except at the end of continuously formed surfaces where the final panel length required is less than 1.8 m. Where the width of the member formed is less than 0.9-m, the width of the panels shall be not less than the width of the member. Panels shall be arranged in symmetrical patterns conforming to the general lines of the structure. Except when otherwise provided herein or shown on the plans, panels for vertical surfaces shall be placed with the long dimension horizontal and with horizontal joints level and continuous. Form panels for curved surfaces of columns shall be continuous for a minimum of one quarter of the circumference, or 1.8 m. For walls with sloping footings which do not abut other walls, panels may be placed with the long dimension parallel to the footing. Form panels on each side of the panel joint shall be precisely aligned, by means of supports or fasteners common to both panels, to result in a continuous unbroken concrete plane surface. When prefabricated soffit panels are used, form filler panels joining prefabricated panels shall have a uniform minimum width of 0.3-m and shall produce a smooth uniform surface with consistent longitudinal joint lines between the prefabricated panels.

The first and second paragraph in Section 51-1.06A, "Falsework Design and Drawings," of the Standard Specifications are amended to read:

• The Contractor shall submit to the Engineer working drawings and design calculations for falsework proposed for use at bridges. For bridges where the height of any portion of the falsework, as measured from the ground line to the soffit of the superstructure, exceeds 4.25 m; or where any individual falsework clear span length exceeds 4.85 m; or where provision for vehicular, pedestrian, or railroad traffic through the falsework is made; the drawings shall be signed by an engineer who is registered as a Civil Engineer in the State of California. Six sets of the working drawings and 2 copies of the design calculations shall be furnished. Additional working drawings and design calculations shall be submitted to the Engineer when specified in "Railroad Relations and Insurance" of the special provisions.

• The falsework drawings shall include details of the falsework erection and removal operations showing the methods and sequences of erection and removal and the equipment to be used. The details of the falsework erection and removal operations shall demonstrate the stability of all or any portions of the falsework during all stages of the erection and removal operations.

The seventh paragraph in Section 51-1.06A, "Falsework Design and Drawings," of the Standard Specifications is amended to read:

- In the event that several falsework plans are submitted simultaneously, or an additional plan is submitted for review before the review of a previously submitted plan has been completed, the Contractor shall designate the sequence in which the plans are to be reviewed. In such event, the time to be provided for the review of any plan in the sequence shall be not less than the review time specified above for that plan, plus 2 weeks for each plan of higher priority which is still under review. A falsework plan submittal shall consist of plans for a single bridge or portion thereof. For multi-frame bridges, each frame shall require a separate falsework plan submittal.

Section 51-1.06A, "Falsework Design and Drawings," of the Standard Specifications is amended by adding the following paragraphs:

- If structural composite lumber is proposed for use, the falsework drawings shall clearly identify the structural composite lumber members by grade (E value), species, and type. The Contractor shall provide technical data from the manufacturer showing the tabulated working stress values of the composite lumber. The Contractor shall furnish a certificate of compliance as specified in Section 6-1.07, "Certificates of Compliance," for each delivery of structural composite lumber to the project site.
- For falsework piles with a calculated loading capacity greater than 900 kN, the falsework piles shall be designed by an engineer who is registered as either a Civil Engineer or a Geotechnical Engineer in the State of California, and the calculations shall be submitted to the Engineer.

The first paragraph in Section 51-1.06A(1), "Design Loads," of the Standard Specifications is amended to read:

- The design load for falsework shall consist of the sum of dead and live vertical loads, and an assumed horizontal load. The minimum total design load for any falsework, including members that support walkways, shall be not less than 4800 $N/m^2$ for the combined live and dead load regardless of slab thickness.

The eighth paragraph in Section 51-1.06A(1), "Design Loads," of the Standard Specifications is amended to read:

- In addition to the minimum requirements specified in this Section 51-1.06A, falsework for box girder structures with internal falsework bracing systems using flexible members capable of withstanding tensile forces only, shall be designed to include the vertical effects caused by the elongation of the flexible member and the design horizontal load combined with the dead and live loads imposed by concrete placement for the girder stems and connected bottom slabs. Falsework comprised of individual steel towers with bracing systems using flexible members capable of withstanding tensile forces only to resist overturning, shall be exempt from these additional requirements.

The third paragraph in Section 51-1.06B, "Falsework Construction," of the Standard Specifications is amended to read:

- When falsework is supported on piles, the piles shall be driven and the actual nominal resistance assessed in conformance with the provisions in Section 49, "Piling."

Section 51-1.06B, "Falsework Construction," of the Standard Specifications is amended by adding the following paragraphs:

- For falsework piles with a calculated nominal resistance greater than 1800 kN, the Contractor shall conduct dynamic monitoring of pile driving and generate field acceptance criteria based on a wave equation analysis. These analyses shall be signed by an engineer who is registered as a Civil Engineer in the State of California and submitted to the Engineer prior to completion of falsework erection.

- Prior to the placement of falsework members above the stringers, the final bracing system for the falsework shall be installed.

Section 51-1.06C, "Removing Falsework," of the Standard Specifications is amended by adding the following paragraph:

- The falsework removal operation shall be conducted in such a manner that any portion of the falsework not yet removed remains in a stable condition at all times.

The sixth paragraph in Section 51-1.09, "Placing Concrete," of the Standard Specifications is amended to read:

• Vibrators used to consolidate concrete containing epoxy-coated bar reinforcement or epoxy-coated prestressing steel shall have a resilient covering to prevent damage to the epoxy-coating on the reinforcement or prestressing steel.

The third sentence of the fourth paragraph in Section 51-1.12D, "Sheet Packing, Preformed Pads and Board Fillers," of the Standard Specifications is amended to read:

Surfaces of expanded polystyrene against which concrete is placed shall be faced with hardboard.

Section 51-1.12F, "Sealed Joints," of the Standard Specifications is amended by adding the following paragraph:

• The opening of the joints at the time of placing shall be that shown on the plans adjusted for temperature. Care shall be taken to avoid impairment of the clearance in any manner.

The first paragraph in Section 51-1.12F, "Sealed Joints," of the Standard Specifications is amended to read:

• Where shown on the plans, joints in structures shall be sealed with joint seals, joint seal assemblies, or seismic joints in conformance with the details shown on the plans, the provisions in these specifications, and the special provisions.

The fourth paragraph in Section 51-1.12F, "Sealed Joints," of the Standard Specifications is amended to read:

• Joint seal assemblies and seismic joints shall consist of metal or metal and elastomeric assemblies which are anchored or cast into a recess in the concrete over the joint. Strip seal joint seal assemblies consist of only one joint cell. Modular unit joint seal assemblies consist of more than one joint cell.

The fifth paragraph in Section 51-1.12F, "Sealed Joints," of the Standard Specifications is amended to read:

• The Movement Rating (MR) shall be measured normal to the longitudinal axis of the joint. The type of seal to be used for the MR shown on the plans shall be as follows:

| Movement Rating (MR) | Seal Type |
|---|---|
| MR ≤ 15 mm | Type A or Type B |
| 15 mm < MR ≤ 30 mm | Type A (silicone only) or Type B |
| 30 mm < MR ≤ 50 mm | Type B |
| 50 mm < MR ≤ 100 mm | Joint Seal Assembly (Strip Seal) |
| MR > 100 mm | Joint Seal Assembly (Modular Unit) or Seismic Joint |

The second paragraph in Section 51-1.12F(3)(b), "Type B Seal," of the Standard Specifications is amended to read:

• The preformed elastomeric joint seal shall conform to the requirements in ASTM Designation: D 2628 and the following:

A. The seal shall consist of a multi-channel, nonporous, homogeneous material furnished in a finished extruded form.
B. The minimum depth of the seal, measured at the contact surface, shall be at least 95 percent of the minimum uncompressed width of the seal as designated by the manufacturer.
C. When tested in conformance with the requirements in California Test 673 for Type B seals, joint seals shall provide a Movement Rating (MR) of not less than that shown on the plans.
D. The top and bottom edges of the joint seal shall maintain continuous contact with the sides of the groove over the entire range of joint movement.
E. The seal shall be furnished full length for each joint with no more than one shop splice in any 18-m length of seal.
F. The Contractor shall demonstrate the adequacy of the procedures to be used in the work before installing seals in the joints.
G. Shop splices and field splices shall have no visible offset of exterior surfaces, and shall show no evidence of bond failure.
H. At all open ends of the seal that would admit water or debris, each cell shall be filled to a depth of 80 mm with commercial quality open cell polyurethane foam, or closed by other means subject to approval by the Engineer.

Section 51-1.12F(3)(c), "Joint Seal Assemblies," of the Standard Specifications is amended to read:

**(c) Joint Seal Assemblies and Seismic Joints**

- Joint seal assemblies and seismic joints shall be furnished and installed in joints in bridge decks as shown on the plans and as specified in the special provisions.

The eighth paragraph in Section 51-1.12H(1), "Plain and Fabric Reinforced Elastomeric Bearing Pads," of the Standard Specifications is amended to read:

- The elastomer, as determined from test specimens, shall conform to the following:

| Test | ASTM Designation | Requirement |
|---|---|---|
| Tensile strength, MPa | D 412 | 15.5 Min. |
| Elongation at break, percent | D 412 | 350 Min. |
| Compression set, 22 h at 70°C, percent | D 395 (Method B) | 25 Max. |
| Tear strength, kN/m | D 624 (Die C) | 31.5 Min. |
| Hardness (Type A) | D 2240 with 2 kg. mass | 55 ±5 |
| Ozone resistance 20% strain, 100 h at 40°C ±2°C | D 1149 (except 100 ±20 parts per 100 000 000) | No cracks |
| Instantaneous thermal stiffening at -40°C | D 1043 | Shall not exceed 4 times the stiffness measured at 23°C |
| Low temperature brittleness at -40°C | D 746 (Procedure B) | Pass |

The table in the ninth paragraph of Section 51-1.12H(1), "Plain and Fabric Reinforced Elastomeric Bearing Pads," of the Standard Specifications is amended to read:

| | |
|---|---|
| Tensile strength, percent | -15 |
| Elongation at break, percent | -40; but not less than 300% total elongation of the material |
| Hardness, points | +10 |

The first paragraph in Section 51-1.12H(2), "Steel Reinforced Elastomeric Bearings," of the Standard Specifications is amended to read:

- Steel reinforced elastomeric bearings shall conform to the requirements for steel-laminated elastomeric bearings in ASTM Designation: D 4014 and the following:

A. The bearings shall consist of alternating steel laminates and internal elastomer laminates with top and bottom elastomer covers. Steel laminates shall have a nominal thickness of 1.9 mm (14 gage). Internal elastomer laminates shall have a thickness of 12 mm, and top and bottom elastomer covers shall each have a thickness of 6 mm. The combined thickness of internal elastomer laminates and top and bottom elastomer covers shall be equal to the bearing pad thickness shown on the plans. The elastomer cover to the steel laminates at the sides of the bearing shall be 3 mm. If guide pins or other devices are used to control the side cover over the steel laminates, any exposed portions of the steel laminates shall be sealed by vulcanized patching. The length, width, or diameter of the bearings shall be as shown on the plans.
B. The total thickness of the bearings shall be equal to the thickness of elastomer laminates and covers plus the thickness of the steel laminates.
C. Elastomer for steel reinforced elastomeric bearings shall conform to the provisions for elastomer in Section 51-1.12H(1), "Plain and Fabric Reinforced Elastomeric Bearing Pads."
D. A Certificate of Compliance conforming to the provisions in Section 6-1.07, "Certificates of Compliance," shall be furnished to the Engineer certifying that the bearings to be furnished conform to all of the above provisions. The Certificate of Compliance shall be supported by a certified copy of the results of tests performed by the manufacturer on the bearings.

E. One sample bearing shall be furnished to the Engineer from each lot of bearings to be furnished for the contract. Samples shall be available at least 3 weeks in advance of intended use. The sample bearing shall be one of the following:

| Bearing Pad Thickness as Shown on the Plans | Sample Bearing |
|---|---|
| ≤ 50 mm | Smallest complete bearing shown on the plans |
| > 50 mm | * 57 ± 3 mm thick sample not less than 200 mm x 305 mm in plan and cut by the manufacturer from the center of one of the thickest complete bearings |

* The sample bearing plus remnant parts of the complete bearing shall be furnished to the Engineer.

F. A test specimen taken from the sample furnished to the Engineer will be tested in conformance with the requirements in California Test 663. Specimens tested shall show no indication of loss of bond between the elastomer and steel laminates.

The fourth paragraph in Section 51-1.14, "Waterstops," of the Standard Specifications is amended to read:

• Neoprene shall be manufactured from a vulcanized elastomeric compound containing neoprene as the sole elastomer and shall conform to the following:

| Test | ASTM Designation | Requirement |
|---|---|---|
| Tensile strength, MPa | D 412 | 13.8 Min. |
| Elongation at break, percent | D 412 | 300 Min. |
| Compression set, 22 h at 70°C, percent | D 395 (Method B) | 30 Max. |
| Tear strength, kN/m | D 624 (Die C) | 26.3 Min. |
| Hardness (Type A) | D 2240 | 55±5 |
| Ozone resistance 20% strain, 100 h at 38°C ±1°C | D 1149 (except 100± 20 parts per 100 000 000) | No cracks |
| Low temperature brittleness at -40°C | D 746 (Procedure B) | Pass |
| Flame resistance | C 542 | Must not propagate flame |
| Oil Swell, ASTM Oil #3, 70 h at 100°C, volume change, percent | D 471 | 80 Max. |
| Water absorption, immersed 7 days at 70°C, change in mass, percent | D 471 | 15 Max. |

The first sentence of the fourth paragraph in Section 51-1.17, "Finish Bridge Decks," of the Standard Specifications is amended to read:

• The smoothness of completed roadway surfaces of structures, approach slabs and the adjacent 15 m of approach pavement, and the top surfaces of concrete decks which are to be covered with another material, will be tested by the Engineer with a bridge profilograph in conformance with the requirements in California Test 547 and the requirements herein.

Section 51-1.17, "Finishing Bridge Decks," of the Standard Specifications is amended by deleting the seventh, thirteenth and fourteenth paragraphs.

The fourteenth paragraph in Section 51-1.23, "Payment," of the Standard Specifications is amended by deleting "and injecting epoxy in cracks".

## SECTION 52: REINFORCEMENT

Issue Date: November 2, 2004

The first paragraph in Section 52-1.02A, "Bar Reinforcement," of the Standard Specifications is amended to read:

• Reinforcing bars shall be low-alloy steel deformed bars conforming to the requirements in ASTM Designation: A 706/A 706M, except that deformed or plain billet-steel bars conforming to the requirements in ASTM Designation: A 615/A 615M, Grade 280 or 420, may be used as reinforcement in the following 5 categories:

A. Slope and channel paving,
B. Minor structures,
C. Sign and signal foundations (pile and spread footing types),
D. Roadside rest facilities, and
E. Concrete barrier Type 50 and Type 60 series and temporary railing.

The third paragraph in Section 52-1.04, "Inspection," of the Standard Specifications is amended to read:

• A Certificate of Compliance conforming to the provisions in Section 6-1.07, "Certificates of Compliance," shall also be furnished for each shipment of epoxy-coated bar reinforcement or wire reinforcement certifying that the coated reinforcement conforms to the requirements in ASTM Designation: A 775/A 775M or A 884/A 884M respectively, and the provisions in Section 52-1.02B, "Epoxy-coated Reinforcement." The Certificate of Compliance shall include all of the certifications specified in ASTM Designation: A 775/A 775M or A 884/A 884M respectively.

Section 52-1.07 "Placing," of the Standard Specifications is amended by deleting item C of the third paragraph.

The eleventh paragraph in Section 52-1.07, "Placing," of the Standard Specifications is amended to read:

• Attention is directed to the provisions in Section 7-1.09, "Public Safety." Whenever a portion of an assemblage of bar reinforcing steel that is not encased in concrete exceeds 6 m in height, the Contractor shall submit to the Engineer for approval, in accordance with the provisions in Section 5-1.02, "Plans and Working Drawings," working drawings and design calculations for the temporary support system to be used. The working drawings and design calculations shall be signed by an engineer who is registered as a Civil Engineer in the State of California. The temporary support system shall be designed to resist all expected loads and shall be adequate to prevent collapse or overturning of the assemblage. If the installation of forms or other work requires revisions to or temporary release of any portion of the temporary support system, the working drawings shall show the support system to be used during each phase of construction. The minimum horizontal wind load to be applied to the bar reinforcing steel assemblage, or to a combined assemblage of reinforcing steel and forms, shall be the sum of the products of the wind impact area and the applicable wind pressure value for each height zone. The wind impact area is the total projected area of the cage normal to the direction of the applied wind. Wind pressure values shall be determined from the following table:

| Height Zone (Meters above ground) | Wind Pressure Value (Pa) |
|---|---|
| 0-9.0 | 960 |
| 9.1-15.0 | 1200 |
| 15.1-30.0 | 1440 |
| Over 30 | 1675 |

Section 52-1.08 "Splicing," of the Standard Specifications is amended to read:

**52-1.08 SPLICING**

• Splices of reinforcing bars shall consist of lap splices, service splices, or ultimate butt splices.

• Splicing of reinforcing bars will not be permitted at a location designated on the plans as a "No-Splice Zone." At the option of the Contractor, reinforcing bars may be continuous at locations where splices are shown on the plans. The location of splices, except where shown on the plans, shall be determined by the Contractor using available commercial lengths where practicable.

• Unless otherwise shown on the plans, splices in adjacent reinforcing bars at any particular section shall be staggered. The minimum distance between staggered lap splices or mechanical lap splices shall be the same as the length required for a lap splice in the largest bar. The minimum distance between staggered butt splices shall be 600 mm, measured between the midpoints of the splices along a line which is centered between the axes of the adjacent bars.

**52-1.08A Lap Splicing Requirements**

• Splices made by lapping shall consist of placing reinforcing bars in contact and wiring them together, maintaining the alignment of the bars and the minimum clearances. Should the Contractor elect to use a butt welded or mechanical splice at a location not designated on the plans as requiring a service or ultimate butt splice, this splice shall conform to the testing requirements for service splice.

• Reinforcing bars shall not be spliced by lapping at locations where the concrete section is not sufficient to provide a minimum clear distance of 50 mm between the splice and the nearest adjacent bar. The clearance to the surface of the concrete specified in Section 52-1.07, "Placing," shall not be reduced.

• Reinforcing bars Nos. 43 and 57 shall not be spliced by lapping.

• Where ASTM Designations: A 615/A 615M, Grade 420 or A 706/A 706M reinforcing bars are required, the length of lap splices shall be as follows: Reinforcing bars No. 25 or smaller shall be lapped at least 45 diameters of the smaller bar joined; and reinforcing bars Nos. 29, 32, and 36 shall be lapped at least 60 diameters of the smaller bar joined, except when otherwise shown on the plans.

• Where ASTM Designation: A 615/A 615M, Grade 280 reinforcing bars are permitted, the length of lap splices shall be as follows: Reinforcing bars No. 25 or smaller shall be lapped at least 30 diameters of the smaller bar joined; and reinforcing bars Nos. 29, 32, and 36 shall be lapped at least 45 diameters of the smaller bar joined, except when otherwise shown on the plans.

• Splices in bundled bars shall conform to the following:

A In bundles of 2 bars, the length of the lap splice shall be the same as the length of a single bar lap splice.
B. In bundles of 3 bars, the length of the lap splice shall be 1.2 times the length of a single bar lap splice.

• Welded wire fabric shall be lapped such that the overlap between the outermost cross wires is not less than the larger of:

A. 150 mm,
B. The spacing of the cross wires plus 50 mm, or
C. The numerical value of the longitudinal wire size (MW-Size Number) times 370 divided by the spacing of the longitudinal wires in millimeters.

**52-1.08B Service Splicing and Ultimate Butt Splicing Requirements**

• Service splices and ultimate butt splices shall be either butt welded or mechanical splices, shall be used at the locations shown on the plans, and shall conform to the requirements of these specifications and the special provisions.

**52-1.08B(1) Mechanical Splices**

• Mechanical splices to be used in the work shall be on the Department's current prequalified list before use. The prequalified list can be obtained from the Department's internet site listed in the special provisions or by contacting the Transportation Laboratory directly.

• When tested in conformance with the requirements in California Test 670, the total slip shall not exceed the values listed in the following table:

| Reinforcing Bar Number | Total Slip (μm) |
|---|---|
| 13 | 250 |
| 16 | 250 |
| 19 | 250 |
| 22 | 350 |
| 25 | 350 |
| 29 | 350 |
| 32 | 450 |
| 36 | 450 |
| 43 | 600 |
| 57 | 750 |

• Slip requirements shall not apply to mechanical lap splices, splices that are welded, or splices that are used on hoops.

- Splicing procedures shall be in conformance with the manufacturer's recommendations, except as modified in this section. Splices shall be made using the manufacturer's standard equipment, jigs, clamps, and other required accessories.
- Splice devices shall have a clear coverage of not less than 40 mm measured from the surface of the concrete to the outside of the splice device. Stirrups, ties, and other reinforcement shall be adjusted or relocated, and additional reinforcement shall be placed, if necessary, to provide the specified clear coverage to reinforcement.
- The Contractor shall furnish the following information for each shipment of splice material in conformance with the provisions in Section 6-1.07, "Certificates of Compliance:"

A. The type or series identification of the splice material including tracking information for traceability.
B. The bar grade and size number to be spliced.
C. A copy of the manufacturer's product literature giving complete data on the splice material and installation procedures.
D. A statement that the splicing systems and materials used in conformance with the manufacturer's installation procedures will develop the required tensile strengths, based on the nominal bar area, and will conform to the total slip requirements and the other requirements in these specifications.
E. A statement that the splice material conforms to the type of mechanical splice in the Department's current prequalified list.

**52-1.08B(2) Butt Welded Splices**

- Except for resistance butt welds, butt welded splices of reinforcing bars shall be complete joint penetration butt welds conforming to the requirements in AWS D 1.4, and these specifications.
- Welders and welding procedures shall be qualified in conformance with the requirements in AWS D 1.4.
- Only the joint details and dimensions as shown in Figure 3.2, "Direct Butt Joints," of AWS D 1.4, shall be used for making complete joint penetration butt welds of bar reinforcement. Split pipe backing shall not be used.
- Butt welds shall be made with multiple weld passes using a stringer bead without an appreciable weaving motion. The maximum stringer bead width shall be 2.5 times the diameter of the electrode and slagging shall be performed between each weld pass. Weld reinforcement shall not exceed 4 mm in convexity.
- Electrodes used for welding shall meet the minimum Charpy V-notch impact requirement of 27°J at –20°C.
- For welding of bars conforming to the requirements of ASTM Designation: A 615/A 615M, Grade 280 or Grade 420, the requirements of Table 5.2, "Minimum Preheat and Interpass Temperatures," of AWS D 1.4 are superseded by the following:

The minimum preheat and interpass temperatures shall be 200°C for Grade 280 bars and 300°C for Grade 420 bars. Immediately after completing the welding, at least 150 mm of the bar on each side of the splice shall be covered by an insulated wrapping to control the rate of cooling. The insulated wrapping shall remain in place until the bar has cooled below 90°C.

- When welding different grades of reinforcing bars, the electrode shall conform to Grade 280 bar requirements and the preheat shall conform to the Grade 420 bar requirements.
- In the event that any of the specified preheat, interpass, and post weld cooling temperatures are not met, all weld and heat affected zone metal shall be removed and the splice rewelded.
- Welding shall be protected from air currents, drafts, and precipitation to prevent loss of heat or loss of arc shielding. The method of protecting the welding area from loss of heat or loss of arc shielding shall be subject to approval by the Engineer.
- Reinforcing bars shall not be direct butt spliced by thermite welding.
- Procedures to be used in making welded splices in reinforcing bars, and welders employed to make splices in reinforcing bars, shall be qualified by tests performed by the Contractor on sample splices of the type to be used, before making splices to be used in the work.

**52-1.08B(3) Resistance Butt Welds**

- Shop produced resistance butt welds shall be produced by a fabricator who is approved by the Transportation Laboratory. The list of approved fabricators can be obtained from the Department’s internet site or by contacting the Transportation Laboratory directly.
- Before manufacturing hoops using resistance butt welding, the Contractor shall submit to the Engineer the manufacturer's Quality Control (QC) manual for the fabrication of hoops. As a minimum, the QC manual shall include the following:

A. The pre-production procedures for the qualification of material and equipment.
B. The methods and frequencies for performing QC procedures during production.

C. The calibration procedures and calibration frequency for all equipment.
D. The welding procedure specification (WPS) for resistance welding.
E. The method for identifying and tracking lots.

**52-1.08C Service Splice and Ultimate Butt Splice Testing Requirements**

• The Contractor shall designate in writing a splicing Quality Control Manager (QCM). The QCM shall be responsible directly to the Contractor for 1) the quality of all service and ultimate butt splicing including the inspection of materials and workmanship performed by the Contractor and all subcontractors; and 2) submitting, receiving, and approving all correspondence, required submittals, and reports regarding service and ultimate splicing to and from the Engineer.

• The QCM shall not be employed or compensated by any subcontractor, or by other persons or entities hired by subcontractors, who will provide other services or materials for the project. The QCM may be an employee of the Contractor.

• Testing on prequalification and production sample splices shall be performed at the Contractor's expense, at an independent qualified testing laboratory. The laboratory shall not be employed or compensated by any subcontractor, or by other persons or entities hired by subcontractors who will provide other services or materials for the project, and shall have the following:

A. Proper facilities, including a tensile testing machine capable of breaking the largest size of reinforcing bar to be tested with minimum lengths as shown in this section.
B. A device for measuring the total slip of the reinforcing bars across the splice to the nearest 25 µm, that, when placed parallel to the longitudinal axis of the bar is able to simultaneously measure movement across the splice at 2 locations 180 degrees apart.
C. Operators who have received formal training for performing the testing requirements of ASTM Designation: A 370 and California Test 670.
D. A record of annual calibration of testing equipment performed by an independent third party that has 1) standards that are traceable to the National Institute of Standards and Technology, and 2) a formal reporting procedure, including published test forms.

• The Contractor shall provide samples for quality assurance testing in conformance with the provisions in these specifications and the special provisions.

• Prequalification and production sample splices shall be 1) a minimum length of 1.5 meters for reinforcing bars No. 25 or smaller, and 2 meters for reinforcing bars No. 29 or larger, with the splice located at mid-point; and 2) suitably identified before shipment with weatherproof markings that do not interfere with the Engineer's tamper-proof markings or seals. Splices that show signs of tampering will be rejected.

• Shorter length sample splice bars may be furnished if approved in writing by the Engineer.

• The Contractor shall ensure that sample splices are properly secured and transported to the testing laboratory in such a manner that no alterations to the physical conditions occur during transportation. Sample splices shall be tested in the same condition as received. No modifications to the sample splices shall be made before testing.

• Each set or sample splice, as defined herein, shall be identified as representing either a prequalification or production test sample splice.

• For the purpose of production testing, a lot of either service splices or ultimate butt splices is defined as 1) 150, or fraction thereof, of the same type of mechanical splices used for each bar size and each bar deformation pattern that is used in the work, or 2) 150, or fraction thereof, of complete joint penetration butt welded splices or resistance butt welded splices for each bar size used in the work. If different diameters of hoop reinforcement are shown on the plans, separate lots shall be used for each different hoop diameter.

• Whenever a lot of splices is rejected, the rejected lot and subsequent lots of splices shall not be used in the work until 1) the QCM performs a complete review of the Contractor's quality control process for these splices, 2) a written report is submitted to the Engineer describing the cause of failure for the splices in this lot and provisions for preventing similar failures in future lots, and 3) the Engineer has provided the Contractor with written notification that the report is acceptable. The Engineer shall have 3 working days after receipt of the report to provide notification to the Contractor. In the event the Engineer fails to provide notification within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in providing notification, the Contractor will be compensated for any resulting loss, and an extension of time will be granted in the same manner as provided for in Section 8-1.09, "Right of Way Delays."

**52-1.08C(1) Splice Prequalification Report**

• Before using any service splices or ultimate butt splices in the work, the Contractor shall submit a Splice Prequalification Report. The report shall include splice material information, names of the operators who will be performing the splicing, and descriptions of the positions, locations, equipment, and procedures that will be used in the work.

• The Splice Prequalification Report shall also include certifications from the fabricator for prequalifications of operators and procedures based on sample tests performed no more than 2 years before submitting the report. Each operator shall be certified by performing 2 sample splices for each bar size of each splice type that the operator will be performing in the work. For deformation-dependent types of splice devices, each operator shall be certified by performing 2 additional samples for each bar size and deformation pattern that will be used in the work.

• Prequalification sample splices shall be tested by an independent qualified testing laboratory and shall conform to the appropriate production test criteria and slip requirements specified herein. When epoxy-coated reinforcement is required, resistance butt welded sample splices shall have the weld flash removed by the same procedure as will be used in the work, before coating and testing. The Splice Prequalification Report shall include the certified test results for all prequalification sample splices.

• The QCM shall review and approve the Splice Prequalification Report before submitting it to the Engineer for approval. The Contractor shall allow 2 weeks for the review and approval of a complete report before performing any service splicing or ultimate butt splicing in the work. In the event the Engineer fails to complete the review within the time allowed, and in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays."

**52-1.08C(2) Service Splice Test Criteria**

• Service production and quality assurance sample splices shall be tensile tested in conformance with the requirements in ASTM Designation: A 370 and California Test 670 and shall develop a minimum tensile strength of not less than 550 MPa.

**52-1.08C(2)(a) Production Test Requirements for Service Splices**

• Production tests shall be performed by the Contractor's independent laboratory for all service splices used in the work. A production test shall consist of testing 4 sample splices prepared for each lot of completed splices. The samples shall be prepared by the Contractor using the same splice material, position, operators, location, and equipment, and following the same procedure as used in the work.

• At least one week before testing, the Contractor shall notify the Engineer in writing of the date when and the location where the testing of the samples will be performed.

• The 4 samples from each production test shall be securely bundled together and identified with a completed sample identification card before shipment to the independent laboratory. The card will be furnished by the Engineer. Bundles of samples containing fewer than 4 samples of splices shall not be tested.

• Before performing any tensile tests on production test sample splices, one of the 4 samples shall be tested for, and shall conform to, the requirements for total slip. Should this sample not meet the total slip requirements, one retest, in which the 3 remaining samples are tested for total slip, will be allowed. Should any of the 3 remaining samples not conform to the total slip requirements, all splices in the lot represented by this production test will be rejected.

• If 3 or more sample splices from a production test conform to the provisions in this Section 52-1.08C(2),"Service Splice Test Criteria," all splices in the lot represented by this production test will be considered acceptable, provided each of the 4 samples develop a minimum tensile strength of not less than 420 MPa.

• Should only 2 sample splices from a production test conform to the provisions in this Section 52-1.08C(2), "Service Splice Test Criteria," one additional production test shall be performed on the same lot of splices. This additional production test shall consist of testing 4 samples splices that have been randomly selected by the Engineer and removed by the Contractor from the actual completed lot of splices. Should any of the 4 splices from this additional test fail to conform to these provisions, all splices in the lot represented by these production tests will be rejected.

• If only one sample splice from a production test conforms to the provisions in this Section 52-1.08C(2), "Service Splice Test Criteria," all splices in the lot represented by this production test will be rejected.

• If a production test for a lot fails, the Contractor shall repair or replace all reinforcing bars from which sample splices were removed before the Engineer selects additional splices from this lot for further testing.

**52-1.08C(2)(b) Quality Assurance Test Requirements for Service Splices**

• For the first production test performed, and for at least one, randomly selected by the Engineer, of every 5 subsequent production tests, or portion thereof, the Contractor shall concurrently prepare 4 additional service quality assurance sample splices. These service quality assurance sample splices shall be prepared in the same manner as specified herein for service production sample splices.

• These 4 additional quality assurance sample splices shall be shipped to the Transportation Laboratory for quality assurance testing. The 4 sample splices shall be securely bundled together and identified by location and contract number

with weatherproof markings before shipment. Bundles containing fewer than 4 samples of splices will not be tested. Sample splices not accompanied by the supporting documentation required in Section 52-1.08B(1), for mechanical splices, or in Section 52-1.08B(3), for resistance butt welds, will not be tested.

- Quality assurance testing will be performed in conformance with the requirements for service production sample splices in Section 52-1.08C(2)(a), "Production Test Requirements for Service Splices."

**52-1.08C(3) Ultimate Butt Splice Test Criteria**

- Ultimate production and quality assurance sample splices shall be tensile tested in conformance with the requirements described in ASTM Designation: A 370 and California Test 670.
- A minimum of one control bar shall be removed from the same bar as, and adjacent to, all ultimate production, and quality assurance sample splices. Control bars shall be 1) a minimum length of one meter for reinforcing bars No. 25 or smaller and 1.5 meters for reinforcing bars No. 29 or larger, and 2) suitably identified before shipment with weatherproof markings that do not interfere with the Engineer's tamper-proof markings or seals. The portion of adjacent bar remaining in the work shall also be identified with weatherproof markings that correspond to its adjacent control bar.
- Each sample splice and its associated control bar shall be identified and marked as a set. Each set shall be identified as representing a prequalification, production, or quality assurance sample splice.
- The portion of hoop reinforcing bar, removed to obtain a sample splice and control bar, shall be replaced using a prequalified ultimate mechanical butt splice, or the hoop shall be replaced in kind.
- Reinforcing bars, other than hoops, from which sample splices are removed, shall be repaired using ultimate mechanical butt splices conforming to the provisions in Section 52-1.08C(1), "Splice Prequalification Report," or the bars shall be replaced in kind. These bars shall be repaired or replaced such that no splices are located in any "No Splice Zone" shown on the plans.
- Ultimate production and quality assurance sample splices shall rupture in the reinforcing bar either: 1) outside of the affected zone or 2) within the affected zone, provided that the sample splice has achieved at least 95 percent of the ultimate tensile strength of the control bar associated with the sample splice. In addition, necking of the bar, as defined in California Test 670, shall be evident at rupture regardless of whether the bar breaks inside or outside the affected zone.
- The affected zone is the portion of the reinforcing bar where any properties of the bar, including the physical, metallurgical, or material characteristics, have been altered by fabrication or installation of the splice.
- The ultimate tensile strength shall be determined for all control bars by tensile testing the bars to rupture, regardless of where each sample splice ruptures. If 2 control bars are tested for one sample splice, the bar with the lower ultimate tensile strength shall be considered the control bar.

**52-1.08C(3)(a) Production Test Requirements for Ultimate Butt Splices**

- Production tests shall be performed for all ultimate butt splices used in the work. A production test shall consist of testing 4 sets of sample splices and control bars removed from each lot of completed splices, except when quality assurance tests are performed.
- After the splices in a lot have been completed, and the bars have been epoxy-coated when required, the QCM shall notify the Engineer in writing that the splices in this lot conform to the specifications and are ready for testing. Except for hoops, sample splices will be selected by the Engineer at the job site. Sample splices for hoops will be selected by the Engineer either at the job site or a fabrication facility.
- After notification has been received, the Engineer will randomly select the 4 sample splices to be removed from the lot and place tamper-proof markings or seals on them. The Contractor shall select the adjacent control bar for each sample splice bar, and the Engineer will place tamper-proof markings or seals on them. These ultimate production sample splices and control bars shall be removed by the Contractor, and tested by an independent qualified testing laboratory.
- At least one week before testing, the Contractor shall notify the Engineer in writing of the date when and the location where the testing of the samples will be performed.
- A sample splice or control bar from any set will be rejected if a tamper-proof marking or seal is disturbed before testing.
- The 4 sets from each production test shall be securely bundled together and identified with a completed sample identification card before shipment to the independent laboratory. The card will be furnished by the Engineer. Bundles of samples containing fewer than 4 sets of splices shall not be tested.
- Before performing any tensile tests on production test sample splices, one of the 4 sample splices shall be tested for, and shall conform to, the requirements for total slip. Should this sample splice not meet these requirements, one retest, in which the 3 remaining sample splices are tested for total slip, will be allowed. Should any of the 3 remaining sample splices not conform to these requirements, all splices in the lot represented by this production test will be rejected.
- If 3 or more sample splices from a production test conform to the provisions in Section 52-1.08C(3), "Ultimate Butt Splice Test Criteria," all splices in the lot represented by this production test will be considered acceptable.
- Should only 2 sample splices from a production test conform to the provisions in Section 52-1.08C(3), "Ultimate Butt Splice Test Criteria," one additional production test shall be performed on the same lot of splices. Should any of the

4 sample splices from this additional test fail to conform to these provisions, all splices in the lot represented by these production tests will be rejected.

- If only one sample splice from a production test conforms to the provisions in Section 52-1.08C(3), "Ultimate Butt Splice Test Criteria," all splices in the lot represented by this production test will be rejected.
- If a production test for a lot fails, the Contractor shall repair or replace all reinforcing bars from which sample splices were removed, complete in place, before the Engineer selects additional splices from this lot for further testing.
- Production tests will not be required on repaired splices from a lot, regardless of the type of prequalified ultimate mechanical butt splice used to make the repair. However, should an additional production test be required, the Engineer may select any repaired splice for the additional production test.

**52-1.08C(3)(b) Quality Assurance Test Requirements for Ultimate Butt Splices**

- For the first production test performed, and for at least one, randomly selected by the Engineer, of every 5 subsequent production tests, or portion thereof, the Contractor shall concurrently prepare 4 additional ultimate quality assurance sample splices along with associated control bars.
- Each time 4 additional ultimate quality assurance sample splices are prepared, 2 of these quality assurance sample splice and associated control bar sets and 2 of the production sample splice and associated control bar sets, together, shall conform to the requirements for ultimate production sample splices in Section 52-1.08C(3)(a),"Production Test Requirements for Ultimate Butt Splices."
- The 2 remaining quality assurance sample splice and associated control bar sets, along with the 2 remaining production sample splice and associated control bar sets shall be shipped to the Transportation Laboratory for quality assurance testing. The 4 sets shall be securely bundled together and identified by location and contract number with weatherproof markings before shipment. Bundles containing fewer than 4 sets will not be tested.
- Quality assurance testing will be performed in conformance with the requirements for ultimate production sample splices in Section 52-1.08C(3)(a), "Production Test Requirements for Ultimate Butt Splices."

**52-1.08C(3)(c) Nondestructive Splice Tests**

- When the specifications allow for welded sample splices to be taken from other than the completed lot of splices, the Contractor shall meet the following additional requirements.
- Except for resistance butt welded splices, radiographic examinations shall be performed on 25 percent of all complete joint penetration butt welded splices from a production lot. The size of a production lot will be a maximum of 150 splices. The Engineer will select the splices which will compose the production lot and also the splices within each production lot to be radiographically examined.
- All required radiographic examinations of complete joint penetration butt welded splices shall be performed by the Contractor in conformance with the requirements in AWS D 1.4 and these specifications.
- Before radiographic examination, welds shall conform to the requirements in Section 4.4, "Quality of Welds," of AWS D 1.4.
- Should more than 12 percent of the splices which have been radiographically examined in any production lot be defective, an additional 25 percent of the splices, selected by the Engineer from the same production lot, shall be radiographically examined. Should more than 12 percent of the cumulative total of splices tested from the same production lot be defective, all remaining splices in the lot shall be radiographically examined.
- Additional radiographic examinations performed due to the identification of defective splices shall be at the Contractor's expense.
- All defects shall be repaired in conformance with the requirements in AWS D 1.4.
- The Contractor shall notify the Engineer in writing 48 hours before performing any radiographic examinations.
- The radiographic procedure used shall conform to the requirements in AWS D1.1, AWS D1.4, and the following:

Two exposures shall be made for each complete joint penetration butt welded splice. For each of the 2 exposures, the radiation source shall be centered on each bar to be radiographed. The first exposure shall be made with the radiation source placed at zero degrees from the top of the weld and perpendicular to the weld root and identified with a station mark of "0." The second exposure shall be at 90 degrees to the "0" station mark and shall be identified with a station mark of "90." When obstructions prevent a 90 degree placement of the radiation source for the second exposure, and when approved in writing by the Engineer, the source may be rotated, around the centerline of the reinforcing bar, a maximum of 25 degrees.

For field produced complete joint penetration butt welds, no more than one weld shall be radiographed during one exposure. For shop produced complete joint penetration butt welds, if more than one weld is to be radiographed during one exposure, the angle between the root line of each weld and the direction to the radiation source shall be not less than 65 degrees.

Radiographs shall be made by either X-ray or gamma ray. Radiographs made by X-ray or gamma rays shall have densities of not less than 2.3 nor more than 3.5 in the area of interest. A tolerance of 0.05 in density is allowed for

densitometer variations. Gamma rays shall be from the iridium 192 isotope and the emitting specimen shall not exceed 4.45 mm in the greatest diagonal dimension.

The radiographic film shall be placed perpendicular to the radiation source at all times; parallel to the root line of the weld unless source placement determines that the film must be turned; and as close to the root of the weld as possible.

The minimum source to film distance shall be maintained so as to ensure that all radiographs maintain a maximum geometric unsharpness of 0.020 at all times, regardless of the size of the reinforcing bars.

Penetrameters shall be placed on the source side of the bar and perpendicular to the radiation source at all times. One penetrameter shall be placed in the center of each bar to be radiographed, perpendicular to the weld root, and adjacent to the weld. Penetrameter images shall not appear in the weld area.

When radiography of more than one weld is being performed per exposure, each exposure shall have a minimum of one penetrameter per bar, or 3 penetrameters per exposure. When 3 penetrameters per exposure are used, one penetrameter shall be placed on each of the 2 outermost bars of the exposure, and the remaining penetrameter shall be placed on a centrally located bar.

An allowable weld buildup of 4 mm may be added to the total material thickness when determining the proper penetrameter selection. No image quality indicator equivalency will be accepted. Wire penetrameters or penetrameter blocks shall not be used.

Penetrameters shall be sufficiently shimmed using a radiographically identical material. Penetrameter image densities shall be a minimum of 2.0 and a maximum of 3.6.

Radiographic film shall be Class 1, regardless of the size of reinforcing bars.

Radiographs shall be free of film artifacts and processing defects, including, but not limited to, streaks, scratches, pressure marks or marks made for the purpose of identifying film or welding indications.

Each splice shall be clearly identified on each radiograph and the radiograph identification and marking system shall be established between the Contractor and the Engineer before radiographic inspection begins. Film shall be identified by lead numbers only; etching, flashing or writing in identifications of any type will not be permitted. Each piece of film identification information shall be legible and shall include, as a minimum, the following information: Contractor's name, date, name of nondestructive testing firm, initials of radiographer, contract number, part number and weld number. The letter "R" and repair number shall be placed directly after the weld number to designate a radiograph of a repaired weld.

Radiographic film shall be developed within a time range of one minute less to one minute more than the film manufacturer's recommended maximum development time. Sight development will not be allowed.

Processing chemistry shall be done with a consistent mixture and quality, and processing rinses and tanks shall be clean to ensure proper results. Records of all developing processes and any chemical changes to the developing processes shall be kept and furnished to the Engineer upon request. The Engineer may request, at any time, that a sheet of unexposed film be processed in the presence of the Engineer to verify processing chemical and rinse quality.

The results of all radiographic interpretations shall be recorded on a signed certification and a copy kept with the film packet.

Technique sheets prepared in conformance with the requirements in ASME Boiler and Pressure Vessels Code, Section V, Article 2 Section T-291 shall also contain the developer temperature, developing time, fixing duration and all rinse times.

**52-1.08D Reporting Test Results**

- A Production Test Report for all testing performed on each lot shall be prepared by the independent testing laboratory performing the testing and submitted to the QCM for review and approval. The report shall be signed by an engineer who represents the laboratory and is registered as a Civil Engineer in the State of California. The report shall include, as a minimum, the following information for each test: contract number, bridge number, lot number and location, bar size, type of splice, length of mechanical splice, length of test specimen, physical condition of test sample splice and any associated control bar, any notable defects, total measured slip, ultimate tensile strength of each splice, and for ultimate butt splices, limits of affected zone, location of visible necking area, ultimate tensile strength and 95 percent of this ultimate tensile strength for each control bar, and a comparison between 95 percent of the ultimate tensile strength of each control bar and the ultimate tensile strength of its associated splice.
- The QCM must review, approve, and forward each Production Test Report to the Engineer for review before the splices represented by the report are encased in concrete. The Engineer will have 3 working days to review each Production Test Report and respond in writing after a complete report has been received. Should the Contractor elect to encase any splices before receiving notification from the Engineer, it is expressly understood that the Contractor will not be relieved of the responsibility for incorporating material in the work that conforms to the requirements of the plans and specifications. Material not conforming to these requirements will be subject to rejection. Should the Contractor elect to wait to encase splices pending notification by the Engineer, and in the event the Engineer fails to complete the review and provide notification within the time allowed, and if, in the opinion of the Engineer, the work is delayed or interfered with by reason of

the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays."

- Quality assurance test results for each bundle of 4 sets or 4 samples of splices will be reported in writing to the Contractor within 3 working days after receipt of the bundle by the Transportation Laboratory. In the event that more than one bundle is received on the same day, 2 additional working days shall be allowed for providing test results for each additional bundle received. A test report will be made for each bundle received. Should the Contractor elect to encase splices before receiving notification from the Engineer, it is expressly understood that the Contractor will not be relieved of the responsibility for incorporating material in the work that conforms to the requirements of the plans and specifications. Material not conforming to these requirements will be subject to rejection. Should the Contractor elect to wait to encase splices pending notification by the Engineer, and in the event the Engineer fails to complete the review within the time allowed, and in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays."

Section 52-1.11, "Payment," of the Standard Specifications is amended by adding the following paragraph after the seventh paragraph:

- If a portion or all of the reinforcing steel is epoxy-coated more than 480 air line kilometers from both Sacramento and Los Angeles, additional shop inspection expenses will be sustained by the State. Whereas it is and will be impracticable and extremely difficult to ascertain and determine the actual increase in these expenses, it is agreed that payment to the Contractor for furnishing the epoxy-coated reinforcement will be reduced $5000 for each epoxy-coating facility located more than 480 air line kilometers from both Sacramento and Los Angeles and an additional $3000 ($8000 total) for each epoxy-coating facility located more than 4800 air line kilometers from both Sacramento and Los Angeles.

## SECTION 55: STEEL STRUCTURES

Issue Date: December 31, 2001

Section 55-3.14, "Bolted Connections," of the Standard Specifications is amended by adding the following after the ninth paragraph:

- If a torque multiplier is used in conjunction with a calibrated wrench as a method for tightening fastener assemblies to the required tension, both the multiplier and the wrench shall be calibrated together as a system. The same length input and output sockets and extensions that will be used in the work shall also be included in the calibration of the system. The manufacturer's torque multiplication ratio shall be adjusted during calibration of the system, such that when this adjusted ratio is multiplied by the actual input calibrated wrench reading, the product is a calculated output torque that is within 2 percent of the true output torque. When this system is used in the work to perform any installation tension testing, rotational capacity testing, fastener tightening, or tension verification, it shall be used, intact as calibrated.

The sixth paragraph of Section 55-4.02, "Payment," of the Standard Specifications is amended to read:

- If a portion or all of the structural steel is fabricated more than 480 air line kilometers from both Sacramento and Los Angeles, additional shop inspection expenses will be sustained by the State. Whereas it is and will be impracticable and extremely difficult to ascertain and determine the actual increase in these expenses, it is agreed that payment to the Contractor for furnishing the structural steel from each fabrication site located more than 480 air line kilometers from both Sacramento and Los Angeles will be reduced $5000 or by an amount computed at $0.044 per kilogram of structural steel fabricated, whichever is greater, or in the case of each fabrication site located more than 4800 air line kilometers from both Sacramento and Los Angeles, payment will be reduced $8000 or by $0.079 per kilogram of structural steel fabricated, whichever is greater.

## SECTION 56: SIGNS

Issue Date: November 2, 2004

Section 56-1.01, "Description," of the Standard Specifications is amended by deleting the third paragraph.

Section 56-1.02A, "Bars, Plates and Shapes," of the Standard Specifications is amended to read:

**56-1.02A Bars, Plates, Shapes, and Structural Tubing**

- Bars, plates, and shapes shall be structural steel conforming to the requirements in ASTM Designation: A 36/A 36M, except, at the option of the Contractor, the light fixture mounting channel shall be continuous-slot steel channel conforming to the requirements in ASTM Designation: A 1011/A 1011M, Designation SS, Grade 33[230], or aluminum Alloy 6063-T6 extruded aluminum conforming to the requirements in ASTM Designation: B 221 or B 221M.
- Structural tubing shall be structural steel conforming to the requirements in ASTM Designation: A 500, Grade B.
- Removable sign panel frames shall be constructed of structural steel conforming to the requirements in ASTM Designation: A 36/A 36M.

Section 56-1.02B, "Sheets," of the Standard Specifications is amended to read:

**56-1.02B Sheets**

- Sheets shall be carbon-steel sheets conforming to the requirements in ASTM Designation: A 1011/A 1011M, Designation SS, Grade 33[230].
- Ribbed sheet metal for box beam-closed truss sign structures shall be fabricated from galvanized sheet steel conforming to the requirements in ASTM Designation: A 653/A 653M, Designation SS, Grade 33[230]. Sheet metal panels shall be G 165 coating designation in conformance with the requirements in ASTM Designation: A 653/A 653M.

Section 56-1.02F, "Steel Walkway Gratings," of the Standard Specifications is amended to read:

**56-1.02F Steel Walkway Gratings**

- Steel walkway gratings shall be furnished and installed in conformance with the details shown on the plans and the following provisions:

A. Gratings shall be the standard product of an established grating manufacturer.
B. Material for gratings shall be structural steel conforming to the requirements in ASTM Designation: A 1011/A 1011M, Designation CS, Type B.
C. For welded type gratings, each joint shall be full resistance welded under pressure, to provide a sound, completely beaded joint.
D. For mechanically locked gratings, the method of fabrication and interlocking of the members shall be approved by the Engineer, and the fabricated grating shall be equal in strength to the welded type.
E. Gratings shall be accurately fabricated and free from warps, twists, or other defects affecting their appearance or serviceability. Ends of all rectangular panels shall be square. The tops of the bearing bars and cross members shall be in the same plane. Gratings distorted by the galvanizing process shall be straightened.

The sixth through the thirteenth paragraphs in Section 56-1.03, "Fabrication," of the Standard Specifications are amended to read:

- High-strength bolted connections, where shown on the plans, shall conform to the provisions in Section 55-3.14, "Bolted Connections," except that only fastener assemblies consisting of a high-strength bolt, nut, hardened washer, and direct tension indicator shall be used.
- High-strength fastener assemblies, and any other bolts, nuts, and washers attached to sign structures shall be zinc-coated by the mechanical deposition process.
- Nuts for high-strength bolts designated as snug-tight shall not be lubricated.
- An alternating snugging and tensioning pattern for anchor bolts and high-strength bolted splices shall be used. Once tensioned, high-strength fastener components and direct tension indicators shall not be reused.
- For bolt diameters less than 10 mm, the diameter of the bolt hole shall be not more than 0.80-mm larger than the nominal bolt diameter. For bolt diameters greater than or equal to 10 mm, the diameter of the bolt hole shall be not more than 1.6 mm larger than the nominal bolt diameter.
- Sign structures shall be fabricated into the largest practical sections prior to galvanizing.
- Ribbed sheet metal panels for box beam closed truss sign structures shall be fastened to the truss members by cap screws or bolts as shown on the plans, or by 4.76 mm stainless steel blind rivets conforming to Industrial Fasteners Institute, Standard IFI-114, Grade 51. The outside diameter of the large flange rivet head shall be not less than 15.88 mm in diameter. Web splices in ribbed sheet metal panels may be made with similar type blind rivets of a size suitable for the thickness of material being connected.
- Spalling or chipping of concrete structures shall be repaired by the Contractor at the Contractor's expense.

• Overhead sign supports shall have an aluminum identification plate permanently attached near the base, adjacent to the traffic side on one of the vertical posts, using either stainless steel rivets or stainless steel screws. As a minimum, the information on the plate shall include the name of the manufacturer, the date of manufacture and the contract number.

The fifth paragraph of Section 56-2.02B, "Wood Posts," of the Standard Specifications is amended to read:

• Douglas fir and Hem-Fir posts shall be treated in conformance with the provisions in Section 58, "Preservative Treatment of Lumber, Timber and Piling," and in conformance with AWPA Use Category System: UC4A, Commodity Specification A. Posts shall be incised and the minimum retention of preservative shall be as specified in AWPA Standards.

## SECTION 57: TIMBER STRUCTURES

Issue Date: October 12, 2004

The second paragraph of Section 57-1.02A, "Structural Timber and Lumber," of the Standard Specifications is amended to read:

• When preservative treatment of timber and lumber is required, the treatment shall conform to the provisions in Section 58, "Preservative Treatment of Lumber, Timber and Piling," and AWPA's Use Category 4B. The type of treatment to be used will be shown on the plans or specified in the special provisions.

## SECTION 58: PRESERVATIVE TREATMENT OF LUMBER, TIMBER AND PILING

Issue Date: November 2, 2004

The first paragraph of Section 58-1.02, "Treatment and Retention," of the Standard Specifications is amended to read:

• Unless otherwise permitted by the Engineer or otherwise specified in the special provisions, the timber, lumber and piling shall be pressure treated after all millwork is completed. The preservatives, treatment and results of treatment shall be in conformance with AWPA Standards U1-03, "User Specification for Treated Wood," and T1-03, "Processing and Treatment." Except as provided below, treatment of lumber and timber shall conform to the specified AWPA Use Category. The type of treatment to be used shall be one of those named in the special provisions, on the plans, or elsewhere in these specifications.

The second paragraph of Section 58-1.02, "Treatment and Retention," of the Standard Specifications is deleted.

## SECTION 59: PAINTING

Issue Date: December 31, 2001

Section 59-2.01, "General," of the Standard Specifications is amended by adding the following paragraphs after the first paragraph:

• Unless otherwise specified, no painting Contractors or subcontractors will be permitted to commence work without having the following current "SSPC: The Society for Protective Coatings" (formerly the Steel Structures Painting Council) certifications in good standing:

A. For cleaning and painting structural steel in the field, certification in conformance with the requirements in Qualification Procedure No. 1, "Standard Procedure For Evaluating Painting Contractors (Field Application to Complex Industrial Structures)" (SSPC-QP 1).
B. For removing paint from structural steel, certification in conformance with the requirements in Qualification Procedure No. 2, "Standard Procedure For Evaluating Painting Contractors (Field Removal of Hazardous Coatings from Complex Structures)" (SSPC-QP 2).
C. For cleaning and painting structural steel in a permanent painting facility, certification in conformance with the requirements in Qualification Procedure No. 3, "Standard Procedure For Evaluating Qualifications of Shop Painting Applicators" (SSPC-QP 3). The AISC's Sophisticated Paint Endorsement (SPE) quality program will be considered equivalent to SSPC-QP 3.

The third paragraph of Section 59-2.03, "Blast Cleaning," of the Standard Specifications is amended to read:

- Exposed steel or other metal surfaces to be blast cleaned shall be cleaned in conformance with the requirements in Surface Preparation Specification No. 6, "Commercial Blast Cleaning," of the "SSPC: The Society for Protective Coatings." Blast cleaning shall leave all surfaces with a dense, uniform, angular anchor pattern of not less than 35 µm as measured in conformance with the requirements in ASTM Designation: D 4417.

The first paragraph of Section 59-2.06, "Hand Cleaning," of the Standard Specifications is amended to read:

- Dirt, loose rust and mill scale, or paint which is not firmly bonded to the surfaces shall be removed in conformance with the requirements in Surface Preparation Specification No. 2, "Hand Tool Cleaning," of the "SSPC: The Society for Protective Coatings." Edges of old remaining paint shall be feathered.

The fourth paragraph of Section 59-2.12, "Painting," of the Standard Specifications is amended to read:

- The dry film thickness of the paint will be measured in place with a calibrated Type 2 magnetic film thickness gage in conformance with the requirements of specification SSPC-PA2 of the "SSPC: The Society for Protective Coatings."

## SECTION 75: MISCELLANEOUS METAL

Issue Date: November 2, 2004

The table in the tenth paragraph of Section 75-1.02, "Miscellaneous Iron and Steel," of the Standard Specifications is amended to read:

| Material | Specification |
|---|---|
| Steel bars, plates and shapes | ASTM Designation: A 36/A 36M or A 575, A 576 (AISI or M Grades 1016 through 1030) |
| Steel fastener components for general applications: | |
| Bolts and studs | ASTM Designation: A 307 |
| Headed anchor bolts | ASTM Designation: A 307, Grade B, including S1 supplementary requirements |
| Nonheaded anchor bolts | ASTM Designation: A 307, Grade C, including S1 supplementary requirements and S1.6 of AASHTO Designation: M 314 supplementary requirements<br>or AASHTO Designation: M 314, Grade 36 or 55, including S1 supplementary requirements |
| High-strength bolts and studs, threaded rods, and nonheaded anchor bolts | ASTM Designation: A 449, Type 1 |
| Nuts | ASTM Designation: A 563, including Appendix X1* |
| Washers | ASTM Designation: F 844 |
| Components of high-strength steel fastener assemblies for use in structural steel joints: | |
| Bolts | ASTM Designation: A 325, Type 1 |
| Tension control bolts | ASTM Designation: F 1852, Type 1 |
| Nuts | ASTM Designation: A 563, including Appendix X1* |
| Hardened washers | ASTM Designation: F 436, Type 1, Circular, including S1 supplementary requirements |
| Direct tension indicators | ASTM Designation: F 959, Type 325, zinc-coated |
| Stainless steel fasteners (Alloys 304 & 316) for general applications: | |
| Bolts, screws, studs, threaded rods, and nonheaded anchor bolts | ASTM Designation: F 593 or F 738M |
| Nuts | ASTM Designation: F 594 or F 836M |
| Washers | ASTM Designation: A 240/A 240M and ANSI B 18.22M |
| Carbon-steel castings | ASTM Designation: A 27/A 27M, Grade 65-35 [450-240], Class 1 |
| Malleable iron castings | ASTM Designation: A 47, Grade 32510 or A 47M, Grade 22010 |
| Gray iron castings | ASTM Designation: A 48, Class 30B |
| Ductile iron castings | ASTM Designation: A 536, Grade 65-45-12 |
| Cast iron pipe | Commercial quality |
| Steel pipe | Commercial quality, welded or extruded |
| Other parts for general applications | Commercial quality |

* Zinc-coated nuts that will be tightened beyond snug or wrench tight shall be furnished with a dyed dry lubricant conforming to Supplementary Requirement S2 in ASTM Designation: A 563.

The second paragraph in Section 75-1.03, "Miscellaneous Bridge Metal," of the Standard Specifications is amended to read:

• Miscellaneous bridge metal shall consist of the following, except as further provided in Section 51-1.19, "Utility Facilities," and in the special provisions:

A. Bearing assemblies, equalizing bolts and expansion joint armor in concrete structures.
B. Expansion joint armor in steel structures.
C. Manhole frames and covers, frames and grates, ladder rungs, guard posts and access door assemblies.
D. Deck drains, area drains, retaining wall drains, and drainage piping, except drainage items identified as "Bridge Deck Drainage System" in the special provisions.

The table in the eighteenth paragraph of Section 75-1.03, "Miscellaneous Bridge Metal," of the Standard Specifications is amended to read:

| Stud Diameter (millimeters) | Sustained Tension Test Load (kilonewtons) |
|---|---|
| 29.01-33.00 | 137.9 |
| 23.01-29.00 | 79.6 |
| 21.01-23.00 | 64.1 |
| * 18.01-21.00 | 22.2 |
| 15.01-18.00 | 18.2 |
| 12.01-15.00 | 14.2 |
| 9.01-12.00 | 9.34 |
| 6.00-9.00 | 4.23 |

* Maximum stud diameter permitted for mechanical expansion anchors.

The table in the nineteenth paragraph of Section 75-1.03, "Miscellaneous Bridge Metal," of the Standard Specifications is amended to read:

| Stud Diameter (millimeters) | Ultimate Tensile Load (kilonewtons) |
|---|---|
| 30.01-33.00 | 112.1 |
| 27.01-30.00 | 88.1 |
| 23.01-27.00 | 71.2 |
| 20.01-23.00 | 51.6 |
| 16.01-20.00 | 32.0 |
| 14.01-16.00 | 29.4 |
| 12.00-14.00 | 18.7 |

The table in the twenty-second paragraph of Section 75-1.03, "Miscellaneous Bridge Metal," of the Standard Specifications is amended to read:

Installation Torque Values, (newton meters)

| Stud Diameter (millimeters) | Shell Type Mechanical Expansion Anchors | Integral Stud Type Mechanical Expansion Anchors | Resin Capsule Anchors and Cast-in-Place Inserts |
|---|---|---|---|
| 29.01-33.00 | — | — | 540 |
| 23.01-29.00 | — | — | 315 |
| 21.01-23.00 | — | — | 235 |
| 18.01-21.00 | 110 | 235 | 200 |
| 15.01-18.00 | 45 | 120 | 100 |
| 12.01-15.00 | 30 | 65 | 40 |
| 9.01-12.00 | 15 | 35 | 24 |
| 6.00-9.00 | 5 | 10 | — |

The third paragraph in Section 75-1.035, "Bridge Joint Restrainer Units," of the Standard Specifications is amended to read:

- Cables shall be 19 mm preformed, 6 x 19, wire strand core or independent wire rope core (IWRC), galvanized, and in conformance with the requirements in Federal Specification RR-W-410D, right regular lay, manufactured of improved plow steel with a minimum breaking strength of 200 kN. Two certified copies of mill test reports of each manufactured length of cable used shall be furnished to the Engineer.

The second paragraph in Section 75-1.05, "Galvanizing," of the Standard Specifications is amended to read:

At the option of the Contractor, material thinner than 3.2 mm shall be galvanized either before fabrication in conformance with the requirements of ASTM Designation: A 653/A 653M, Coating Designation Z600, or after fabrication in conformance with the requirements of ASTM Designation: A 123, except that the weight of zinc coating shall average not less than 365 g per square meter of actual surface area with no individual specimen having a coating weight of less than 305 g per square meter.

## SECTION 80: FENCES

Issue Date: October 12, 2004

The second paragraph of Section 80-3.01B(2), "Treated Wood Posts and Braces," of the Standard Specifications is amended to read:

- Posts and braces to be treated shall be pressure treated in conformance with the provisions in Section 58, "Preservative Treatment of Lumber, Timber and Piling," and AWPA Use Category System: UC4A, Commodity Specification A or B.

## SECTION 83: RAILINGS AND BARRIERS

Issue Date: January 31, 2005

The ninth paragraph in Section 83-1.02B, "Metal Beam Guard Railing," of the Standard Specifications is amended to read:

- The grades and species of wood posts and blocks shall be No. 1 timbers (also known as No. 1 structural) Douglas fir or No. 1 timbers Southern yellow pine. Wood posts and blocks shall be graded in conformance with the provisions in Section 57-2, "Structural Timber," of the Standard Specifications, except allowances for shrinkage after mill cutting shall in no case exceed 5 percent of the American Lumber Standards minimum sizes, at the time of installation.

The eleventh paragraph in Section 83-1.02B, "Metal Beam Guard Railing," of the Standard Specifications is amended to read:

- After fabrication, wood posts and blocks shall be pressure treated in conformance with Section 58, "Preservative Treatment of Lumber, Timber and Piling," and AWPA Use Category System: UC4A, Commodity Specification A.

The twelfth paragraph in Section 83-1.02B, "Metal Beam Guard Railing," of the Standard Specifications is amended to read:

- If copper naphthenate, ammoniacal copper arsenate, chromated copper arsenate, ammoniacal copper zinc arsenate, ammoniacal copper quat or copper azole is used to treat the wood posts and blocks, the bolt holes shall be treated as follows:

A. Before the bolts are inserted, bolt holes shall be filled with a grease, recommended by the manufacturer for corrosion protection, which will not melt or run at a temperature of 65°C.

The second paragraph in Section 83-1.02D, "Steel Bridge Railing," of the Standard Specifications is amended to read:

- Structural shapes, tubing, plates, bars, bolts, nuts, and washers shall be structural steel conforming to the provisions in Section 55-2, "Materials." Other fittings shall be commercial quality.

The second and third paragraphs in Section 83-1.02E, "Cable Railing," of the Standard Specifications are replaced with the following paragraph:

- Pipe for posts and braces shall be standard steel pipe or pipe that conforms to the provisions in Section 80-4.01A, "Posts and Braces."

The fourteenth paragraph in Section 83-1.02I, "Chain Link Railing," of the Standard Specifications is amended to read:

- Chain link fabric shall be either 11-gage Type I zinc coated fabric conforming to the requirements in AASHTO Designation: M 181 or 11-gage Type IV polyvinyl chloride (PVC) coated fabric conforming to the requirements in Federal Specification RR-F-191/1D.

The first paragraph in Section 83-2.02D(2), "Materials," of the Standard Specifications is amended to read:

- Type 50 and 60 series concrete barriers shall be constructed of minor concrete conforming to the provisions in Section 90-10, "Minor Concrete," except as follows:

a. The maximum size of aggregate used for extruded or slip-formed concrete barriers shall be at the option of the Contractor, but in no case shall the maximum size be larger than 37.5-mm or smaller than 9.5-mm.
b. If the 9.5-mm maximum size aggregate grading is used to construct extruded or slip-formed concrete barriers, the cementitious material content of the minor concrete shall be not less than 400 kg/m$^3$.

The third paragraph in Section 83-2.02D(2), "Materials," of the Standard Specifications is amended to read:

- The concrete paving between the tops of the 2 walls of concrete barrier (Types 50E, 60E, 60GE, and 60SE) and the optional concrete slab at the base between the 2 walls of concrete barrier (Types 50E, 60E, 60GE, and 60SE) shall be constructed of minor concrete conforming to the provisions of Section 90-10, except that the minor concrete shall contain not less than 300 kg of cementitious material per cubic meter.

The fourth paragraph in Section 83-2.04, "Payments," of the Standard Specifications is amended to read:

- Steel plate barrier attached to concrete barrier at overhead sign foundations, electroliers, drainage structures, and other locations shown on the plans will be measured and paid for as the type of concrete barrier attached thereto.

## SECTION 85: PAVEMENT MARKERS

Issue Date: May 16, 2003

The second through fifth paragraphs in Section 85-1.03, "Sampling, Tolerances and Packaging," of the Standard Specifications are amended to read:

**Sampling**

- Twenty markers selected at random will constitute a representative sample for each lot of markers.
- The lot size shall not exceed 25000 markers.

**Tolerances**

- Three test specimens will be randomly selected from the sample for each test and tested in conformance with these specifications. Should any one of the 3 specimens fail to conform with the requirements in these specifications, 6 additional specimens will be tested. The failure of any one of these 6 specimens shall be cause for rejection of the entire lot or shipment represented by the sample.
- The entire sample of retroreflective pavement markers will be tested for reflectance. The failure of 10 percent or more of the original sampling shall be cause for rejection.

Section 85-1.04, "Non-Reflective Pavement Markers," of the Standard Specifications is amended to read:

**85-1.04 Non-Reflective Pavement Markers**

- Non-reflective pavement markers (Types A and AY) shall be, at the option of the Contractor, either ceramic or plastic conforming to these specifications.
- The top surface of the marker shall be convex with a gradual change in curvature. The top, bottom and sides shall be free of objectionable marks or discoloration that will affect adhesion or appearance.
- The bottom of markers shall have areas of integrally formed protrusions or indentations, which will increase the effective bonding surface area of adhesive. The bottom surface of the marker shall not deviate more than 1.5 mm from a flat surface. The areas of protrusion shall have faces parallel to the bottom of the marker and shall project approximately one mm from the bottom.

The second through fourth paragraphs of Section 85-1.04A, "Non-Reflective Pavement Markers (Ceramic)," of the Standard Specifications are deleted.

The table in the fifth paragraph in Section 85-1.04A, "Non-Reflective Pavement Markers (Ceramic)," of the Standard Specifications is amended to read:

**Testing**

- Tests shall be performed in conformance with the requirements in California Test 669.

| Test | Test Description | Requirement |
|---|---|---|
| a | Bond strength | 4.8 MPa, min. |
| b | Glaze thickness | 180 µm, min. |
| c | Hardness | 6 Moh, min. |
| d | Luminance factor, Type A, white markers only, glazed surface | 75, min. |
| e | Yellowness index, Type A, white markers only, glazed surface | 7, max. |
| f | Color-yellow, Type AY, yellow markers only. The chromaticity coordinates shall be within a color box defined in CTM 669 | Pass |
| g | Compressive strength | 6700 N, min. |
| h | Water absorption | 2.0 %, max. |
| i | Artificial weathering, 500 hours exposure, yellowness index | 20, max. |

Section 85-1.04B, "Non-Reflective Pavement Markers (Plastic)," of the Standard Specifications is amended to read:

**85-1.04B Non-Reflective Pavement Markers (Plastic)**

- Plastic non-reflective pavement markers Types A and AY shall be, at the option of the Contractor, either polypropylene or acrylonitrile-butadiene-styrene (ABS) plastic type.
- Plastic markers shall conform to the testing requirements specified in Section 85-1.04A, "Non-Reflective Pavement Markers (Ceramic)," except that Tests a, b, c, and h shall not apply. The plastic markers shall not be coated with substances that interfere with the ability of the adhesive bonding to the marker.

The sixth and seventh paragraphs in Section 85-1.05, "Retroreflective Pavement Markers," of the Standard Specifications are amended to read:

**Testing**

- Tests shall be performed in conformance with the requirements in California Test 669.

| Test Description | Requirement | | |
|---|---|---|---|
| Bond strength[a] | 3.4 MPa, min. | | |
| Compressive strength[b] | 8900 N, min. | | |
| Abrasion resistance, marker must meet the respective specific intensity minimum requirements after abrasion. | Pass | | |
| Water Soak Resistance | No delamination of the body or lens system of the marker nor loss of reflectance | | |
| | Specific Intensity | | |
| Reflectance | Clear | Yellow | Red |
| 0° Incidence Angle, min. | 3.0 | 1.5 | 0.75 |
| 20° Incidence Angle, min. | 1.2 | 0.60 | 0.30 |
| After one year field evaluation | 0.30 | 0.15 | 0.08 |

a Failure of the marker body or filler material prior to reaching 3.4 MPa shall constitute a failing bond strength test.

b Deformation of the marker of more than 3 mm at a load of less than 8900 N or delamination of the shell and the filler material of more than 3 mm regardless of the load required to break the marker shall be cause for rejection of the markers as specified in Section 85-1.03, "Sampling, Tolerances and Packaging."

- Pavement markers to be placed in pavement recesses shall conform to the above requirements for retroreflective pavement markers except that the minimum compressive strength requirement shall be 5338 N.

The eighth paragraph of Section 85-1.05, "Retroreflective Pavement Markers" of the Standard Specifications is deleted.

The eighth paragraph in Section 85-1.06, "Replacement," of the Standard Specifications is amended to read:

- Epoxy adhesive shall not be used to apply non-reflective plastic pavement markers.

## SECTION 86: SIGNALS, LIGHTING AND ELECTRICAL SYSTEMS

Issue Date: January 31, 2005

The first paragraph of Section 86-2.03, "Foundations," of the Standard Specifications is amended to read:

- Except for concrete for cast-in-drilled-hole concrete pile foundations, portland cement concrete shall conform to Section 90-10, "Minor Concrete."

The fifth paragraph of Section 86-2.03, "Foundations," of the Standard Specifications is amended to read:

- Reinforced cast-in-drilled-hole concrete pile foundations for traffic signal and lighting standards shall conform to the provisions in Section 49, "Piling," with the following exceptions: 1) Material resulting from drilling holes shall be disposed of in conformance with the provisions in Section 86-2.01, "Excavating and Backfilling," and 2) Concrete filling for cast-in-drilled-hole concrete piles will not be considered as designated by compressive strength.

The seventh paragraph of Section 86-2.03, "Foundations," of the Standard Specifications is amended to read:

- Forms shall be true to line and grade. Tops of foundations for posts and standards, except special foundations, shall be finished to curb or sidewalk grade or as directed by the Engineer. Forms shall be rigid and securely braced in place. Conduit ends and anchor bolts shall be placed in proper position and to proper height, and anchor bolts shall be held in place by means of rigid top and bottom templates. The bottom template shall be made of steel. The bottom template shall provide proper spacing and alignment of the anchor bolts near their bottom embedded end. The bottom template shall be installed before placing footing concrete. Anchor bolts shall not be installed more than 1:40 from vertical.

Section 86-2.03, "Foundations," of the Standard Specifications is amended by deleting the eighth paragraph.

The twelfth paragraph of Section 86-2.03, "Foundations," of the Standard Specifications is amended to read:

• Plumbing of the standards shall be accomplished by adjusting the leveling nuts before placing the mortar or before the foundation is finished to final grade. Shims or other similar devices shall not be used for plumbing or raking of posts, standards, or pedestals. After final adjustments of both top nuts and leveling nuts on anchorage assemblies have been made, firm contact shall exist between all bearing surfaces of the anchor bolt nuts, washers, and the base plates.

The first paragraph of Section 86-2.04, "Standards, Steel Pedestals and Posts," of the Standard Specifications is amended to read:

**86-2.04 STANDARDS, STEEL PEDESTALS, AND POSTS**

• Standards for traffic signals and lighting, and steel pedestals for cabinets and other similar equipment, shall be located as shown on the plans. Bolts, nuts and washers, and anchor bolts for use in signal and lighting support structures shall conform to the provisions in Section 55-2, "Materials." Except when bearing-type connections or slipbases are specified, high-strength bolted connections shall conform to the provisions in Section 55-3.14, "Bolted Connections." Welding, nondestructive testing (NDT) of welds, and acceptance and repair criteria for NDT of steel members shall conform to the requirements of AWS D1.1 and the contract special provisions.

The second paragraph of Section 86-2.04, "Standards, Steel Pedestals and Posts," of the Standard Specifications is amended to read:

• On each lighting standard except Type 1, one rectangular corrosion resistant metal identification tag shall be permanently attached above the hand hole, near the base of the standard, using stainless steel rivets. On each signal pole support, two corrosion resistant metal identification tags shall be attached, one above the hand hole near the base of the vertical standard and one on the underside of the signal mast arm near the arm plate. As a minimum, the information on each identification tag shall include the name of the manufacturer, the date of manufacture, the identification number as shown on the plans, the contract number, and a unique identification code assigned by the fabricator. This number shall be traceable to a particular contract and the welds on that component, and shall be readable after the support structure is coated and installed. The lettering shall be a minimum of 7 mm high. The information may be either depressed or raised, and shall be legible.

The fourth paragraph of Section 86-2.04, "Standards, Steel Pedestals and Posts," of the Standard Specifications is amended to read:

• Ferrous metal parts of standards, with shaft length of 4.6 m and longer, shall conform to the details shown on the plans, the provisions in Section 55-2, "Materials," except as otherwise noted, and the following requirements:

Except as otherwise specified, standards shall be fabricated from sheet steel of weldable grade having a minimum yield strength, after fabrication, of 276 MPa.

Certified test reports which verify conformance to the minimum yield strength requirements shall be submitted to the Engineer. The test reports may be the mill test reports for the as-received steel or, when the as-received steel has a lower yield strength than required, the Contractor shall provide supportive test data which provides assurance that the Contractor's method of cold forming will consistently increase the tensile properties of the steel to meet the specified minimum yield strength. The supportive test data shall include tensile properties of the steel after cold forming for specific heats and thicknesses.

When a single-ply 8-mm thick pole is specified, a 2-ply pole with equivalent section modulus may be substituted.

Standards may be fabricated of full-length sheets or shorter sections. Each section shall be fabricated from not more than 2 pieces of sheet steel. Where 2 pieces are used, the longitudinal welded seams shall be directly opposite one another. When the sections are butt-welded together, the longitudinal welded seams on adjacent sections shall be placed to form continuous straight seams from base to top of standard.

Butt-welded circumferential joints of tubular sections requiring CJP groove welds shall be made using a metal sleeve backing ring inside each joint. The sleeve shall be 3-mm nominal thickness, or thicker, and manufactured from steel having the same chemical composition as the steel in the tubular sections to be joined. When the sections to be joined have different specified minimum yield strengths, the steel in the sleeve shall have the same chemical composition as the tubular section having the higher minimum yield strength. The width of the metal sleeve shall be consistent with the type of NDT chosen and shall be a minimum width of 25 mm. The sleeve shall be centered at the joint and be in contact with the tubular section at the point of the weld at time of fit-up.

Welds shall be continuous.

The weld metal at the transverse joint shall extend to the sleeve, making the sleeve an integral part of the joint.

During fabrication, longitudinal seams on vertical tubular members of cantilevered support structures shall be centered on and along the side of the pole that the pole plate is located. Longitudinal seams on horizontal tubular members, including signal and luminaire arms, shall be within +/-45 degrees of the bottom of the arm.

The longitudinal seam welds in steel tubular sections may be made by the electric resistance welding process.

Longitudinal seam welds shall have 60 percent minimum penetration, except that within 150 mm of circumferential welds, longitudinal seam welds shall be CJP groove welds. In addition, longitudinal seam welds on lighting support structures having telescopic pole segment splices shall be CJP groove welds on the female end for a length on each end equal to the designated slip fit splice length plus 150 mm.

Exposed circumferential welds, except fillet and fatigue-resistant welds, shall be ground flush (-0, +2mm) with the base metal prior to galvanizing or painting.

Circumferential welds and base plate-to-pole welds may be repaired only one time without written permission from the Engineer.

Exposed edges of the plates that make up the base assembly shall be finished smooth and exposed corners of the plates shall be broken unless otherwise shown on the plans. Shafts shall be provided with slip-fitter shaft caps.

Flatness of surfaces of 1) base plates that are to come in contact with concrete, grout, or washers and leveling nuts; 2) plates in high-strength bolted connections; 3) plates in joints where cap screws are used to secure luminaire and signal arms; and 4) plates used for breakaway slip base assemblies shall conform to the requirements in ASTM A6.

Standards shall be straight, with a permissive variation not to exceed 25 mm measured at the midpoint of a 9-m or 11-m standard and not to exceed 20 mm measured at the midpoint of a 5-m through 6-m standard. Variation shall not exceed 25 mm at a point 4.5 m above the base plate for Type 35 and Type 36 standards.

Zinc-coated nuts used on fastener assemblies having a specified preload (obtained by specifying a prescribed tension, torque value, or degree of turn) shall be provided with a colored lubricant that is clean and dry to the touch. The color of the lubricant shall be in contrast to the zinc coating on the nut so that the presence of the lubricant is visually obvious. In addition, either the lubricant shall be insoluble in water, or fastener components shall be shipped to the job site in a sealed container.

No holes shall be made in structural members unless the holes are shown on the plans or are approved in writing by the Engineer.

Standards with an outside diameter of 300 mm or less shall be round. Standards with an outside diameter greater than 300 mm shall be round or multisided. Multisided standards shall have a minimum of 12 sides which shall be convex and shall have a minimum bend radius of 100 mm.

Mast arms for standards shall be fabricated from material as specified for standards, and shall conform to the dimensions shown on the plans.

The cast steel option for slip bases shall be fabricated from material conforming to the requirements in ASTM Designation: A 27/A 27M, Grade 70-40. Other comparable material may be used if written permission is given by the Engineer. The casting tolerances shall be in conformance with the Steel Founder's Society of America recommendations (green sand molding).

One casting from each lot of 50 castings or less shall be subject to radiographic inspection, in conformance with the requirements in ASTM Designation: E 94. The castings shall comply with the acceptance criteria severity level 3 or better for the types and categories of discontinuities in conformance with the requirements in ASTM Designations: E 186 and E 446. If the one casting fails to pass the inspection, 2 additional castings shall be radiographed. Both of these castings shall pass the inspection, or the entire lot of 50 will be rejected.

Material certifications, consisting of physical and chemical properties, and radiographic films of the castings shall be filed at the manufacturer's office. These certifications and films shall be available for inspection upon request.

High-strength bolts, nuts, and flat washers used to connect slip base plates shall conform to the requirements in ASTM Designation: A 325 or A 325M and shall be galvanized in conformance with the provisions in Section 75-1.05, "Galvanizing."

Plate washers shall be fabricated by saw cutting and drilling steel plate conforming to the requirements in AISI Designation: 1018, and be galvanized in conformance with the provisions in Section 75-1.05, "Galvanizing." Prior to galvanizing, burrs and sharp edges shall be removed and holes shall be chamfered sufficiently on each side to allow the bolt head to make full contact with the washer without tension on the bolt.

High-strength cap screws shown on the plans for attaching arms to standards shall conform to the requirements in ASTM Designation: A 325, A 325M, or A 449, and shall comply with the mechanical requirements in ASTM Designation: A 325 or A 325M after galvanizing. The cap screws shall be galvanized in conformance with the provisions in Section 75-1.05, "Galvanizing." The threads of the cap screws shall be coated with a colored lubricant that is clean and dry to the touch. The color of the lubricant shall be in contrast to the color of the zinc coating on the cap screw so that presence of the lubricant is visually obvious. In addition, either the lubricant shall be insoluble in water, or fastener components shall be shipped to the job site in a sealed container.

Unless otherwise specified, bolted connections attaching signal or luminaire arms to poles shall be considered slip critical. Galvanized faying surfaces on plates on luminaire and signal arms and matching plate surfaces on poles shall be

roughened by hand using a wire brush prior to assembly and shall conform to the requirements for Class C surface conditions for slip-critical connections in "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts," a specification approved by the Research Council on Structural Connections (RCSC) of the Engineering Foundation. For faying surfaces required to be painted, the paint shall be an approved type, brand, and thickness that has been tested and approved according to the RCSC Specification as a Class B coating.

Samples of fastener components will be randomly taken from each production lot by the Engineer and submitted, along with test reports required by appropriate ASTM fastener specifications, for QA testing and evaluation. Sample sizes for each fastener component shall be as determined by the Engineer.

The seventh paragraph of Section 86-2.04, "Standards, Steel Pedestals and Posts," of the Standard Specifications is amended to read:

- To avoid interference of arm plate-to-tube welds with cap screw heads, and to ensure cap screw heads can be turned using conventional installation tools, fabricators shall make necessary adjustments to details prior to fabrication and properly locate the position of arm tubes on arm plates during fabrication.

The sixth and seventh paragraphs of 86-2.12, "Wood Poles," of the Standard Specifications are amended to read:

- After fabrication, wood poles shall be pressure treated in conformance with the provisions in Section 58, "Preservative Treatment of Lumber, Timber and Piling," and AWPA Use Category System: UC4B, Commodity Specification D.
- Wood poles, when specified in the special provisions to be painted, shall be treated with waterborne wood preservatives.

The first paragraph of Section 86-2.15, "Galvanizing," of the Standard Specifications is amended to read:

- Galvanizing shall be in conformance with the provisions in Section 75-1.05, "Galvanizing," except that cabinets may be constructed of material galvanized prior to fabrication in conformance with the requirements in ASTM Designation: A 653/653M, Coating Designation G 90, in which case all cut or damaged edges shall be painted with at least 2 applications of approved unthinned zinc-rich primer (organic vehicle type) conforming to the provisions in Section 91, "Paint." Aerosol cans shall not be used. Other types of protective coating must be approved by the Engineer prior to installation.

The first paragraph of Section 86-4.06, "Pedestrian Signal Faces" of the Standard Specifications is amended to read:

- Message symbols for pedestrian signal faces shall be white WALKING PERSON and Portland orange UPRAISED HAND conforming to the requirements in the Institute of Transportation Engineers Standards: "Pedestrian Traffic Control Signal Indications," "Manual on Uniform Traffic Control Devices," and "MUTCD California Supplement." The height of each symbol shall be not less than 250 mm and the width of each symbol shall be not less than 165 mm.

The tenth paragraph of Section 86-4.07, "Light Emitting Diode Pedestrian Signal Face 'Upraised Hand' Module" of the Standard Specifications is amended to read:

- The luminance of the "UPRAISED HAND" symbol shall be 3750 cd/m$^2$ minimum. The color of "UPRAISED HAND" shall be Portland orange conforming to the requirements of the Institute of Transportation Engineers Standards: "Pedestrian Traffic Control Signal Indications," "Manual on Uniform Traffic Control Devices," and "MUTCD California Supplement." The height of each symbol shall be not less than 250 mm and the width of each symbol shall be not less than 165 mm.

Section 86-8.01, "Payment," of the Standard Specifications is amended by adding the following paragraph after the first paragraph:

- If a portion or all of the poles for signal, lighting and electrical systems pursuant to Standard Specification Section 86, "Signals, Lighting and Electrical Systems," is fabricated more than 480 air line kilometers from both Sacramento and Los Angeles, additional shop inspection expenses will be sustained by the State. Whereas it is and will be impracticable and extremely difficult to ascertain and determine the actual increase in such expenses, it is agreed that payment to the Contractor for furnishing such items from each fabrication site located more than 480 air line kilometers from both Sacramento and Los Angeles will be reduced $5000; in addition, in the case where a fabrication site is located more than 4800 air line kilometers from both Sacramento and Los Angeles, payment will be reduced an additional $3000 per each fabrication site ($8000 total per site).

## SECTION 88: ENGINEERING FABRIC

Issue Date: January 15, 2002

Section 88-1.02, "Pavement Reinforcing Fabric," of the Standard Specifications is amended to read:

• Pavement reinforcing fabric shall be 100 percent polypropylene staple fiber fabric material, needle-punched, thermally bonded on one side, and conform to the following:

| Specification | Requirement |
|---|---|
| Weight, grams per square meter<br>ASTM Designation: D 5261 | 140 |
| Grab tensile strength<br>(25-mm grip), kilonewtons, min. in each direction<br>ASTM Designation: D 4632 | 0.45 |
| Elongation at break, percent min.<br>ASTM Designation: D 4632 | 50 |
| Asphalt retention by fabric, grams per square meter. (Residual Minimum)<br>ASTM Designation: D 6140 | 900 |

Note: Weight, grab, elongation and asphalt retention are based on Minimum Average Roll Value (MARV)

## SECTION 90: PORTLAND CEMENT CONCRETE

Issue Date: November 2, 2004

Section 90, "Portland Cement Concrete," of the Standard Specifications is amended to read:

## SECTION 90: PORTLAND CEMENT CONCRETE
## 90-1 GENERAL

### 90-1.01 DESCRIPTION

• Portland cement concrete shall be composed of cementitious material, fine aggregate, coarse aggregate, admixtures if used, and water, proportioned and mixed as specified in these specifications.

• The Contractor shall determine the mix proportions for concrete in conformance with these specifications. Unless otherwise specified, cementitious material shall be a combination of cement and mineral admixture. Cementitious material shall be either:

1. "Type IP (MS) Modified" cement; or
2. A combination of "Type II Modified" portland cement and mineral admixture; or
3. A combination of Type V portland cement and mineral admixture.

• Type III portland cement shall be used only as allowed in the special provisions or with the approval of the Engineer.

• Class 1 concrete shall contain not less than 400 kg of cementitious material per cubic meter.

• Class 2 concrete shall contain not less than 350 kg of cementitious material per cubic meter.

• Class 3 concrete shall contain not less than 300 kg of cementitious material per cubic meter.

• Class 4 concrete shall contain not less than 250 kg of cementitious material per cubic meter.

• Minor concrete shall contain not less than 325 kg of cementitious material per cubic meter unless otherwise specified in these specifications or the special provisions.

• Unless otherwise designated on the plans or specified in these specifications or the special provisions, the amount of cementitious material used per cubic meter of concrete in structures or portions of structures shall conform to the following:

| Use | Cementitious Material Content (kg/m3) |
|---|---|
| Concrete designated by compressive strength: | |
| Deck slabs and slab spans of bridges | 400 min., 475 max. |
| Roof sections of exposed top box culverts | 400 min., 475 max. |
| Other portions of structures | 350 min., 475 max. |
| Concrete not designated by compressive strength: | |
| Deck slabs and slab spans of bridges | 400 min. |
| Roof sections of exposed top box culverts | 400 min. |
| Prestressed members | 400 min. |
| Seal courses | 400 min. |
| Other portions of structures | 350 min. |
| Concrete for precast members | 350 min., 550 max. |

- Whenever the 28-day compressive strength shown on the plans is greater than 25 MPa, the concrete shall be designated by compressive strength. If the plans show a 28-day compressive strength that is 28 MPa or greater, an additional 14 days will be allowed to obtain the specified strength. The 28-day compressive strengths shown on the plans that are 25 MPa or less are shown for design information only and are not a requirement for acceptance of the concrete.
- Concrete designated by compressive strength shall be proportioned such that the concrete will attain the strength shown on the plans or specified in the special provisions.
- Before using concrete for which the mix proportions have been determined by the Contractor, or in advance of revising those mix proportions, the Contractor shall submit in writing to the Engineer a copy of the mix design.
- Compliance with cementitious material content requirements will be verified in conformance with procedures described in California Test 518 for cement content. For testing purposes, mineral admixture shall be considered to be cement. Batch proportions shall be adjusted as necessary to produce concrete having the specified cementitious material content.
- If any concrete has a cementitious material, portland cement, or mineral admixture content that is less than the minimum required, the concrete shall be removed. However, if the Engineer determines that the concrete is structurally adequate, the concrete may remain in place and the Contractor shall pay to the State $0.55 for each kilogram of cementitious material, portland cement, or mineral admixture that is less than the minimum required. The Department may deduct the amount from any moneys due, or that may become due, the Contractor under the contract. The deductions will not be made unless the difference between the contents required and those actually provided exceeds the batching tolerances permitted by Section 90-5, "Proportioning." No deductions will be made based on the results of California Test 518.
- The requirements of the preceding paragraph shall not apply to minor concrete or commercial quality concrete.

## 90-2 MATERIALS

### 90-2.01 CEMENT

- Unless otherwise specified, cement shall be either "Type IP (MS) Modified" cement, "Type II Modified" portland cement or Type V portland cement.
- "Type IP (MS) Modified" cement shall conform to the requirements for Type IP (MS) cement in ASTM Designation: C 595, and shall be comprised of an intimate and uniform blend of Type II cement and not more than 35 percent by mass of mineral admixture. The type and minimum amount of mineral admixture used in the manufacture of "Type IP (MS) Modified" cement shall be in conformance with the provisions in Section 90-4.08, "Required Use of Mineral Admixtures."
- "Type II Modified" portland cement shall conform to the requirements for Type II portland cement in ASTM Designation: C 150-02a.
- In addition, "Type IP (MS) Modified" cement and "Type II Modified" portland cement shall conform to the following requirements:

A. The cement shall not contain more than 0.60-percent by mass of alkalies, calculated as the percentage of $Na_2O$ plus 0.658 times the percentage of $K_2O$, when determined by either direct intensity flame photometry or by the atomic absorption method. The instrument and procedure used shall be qualified as to precision and accuracy in conformance with the requirements in ASTM Designation: C 114;
B. The autoclave expansion shall not exceed 0.50-percent; and
C. Mortar, containing the cement to be used and Ottawa sand, when tested in conformance with California Test 527, shall not expand in water more than 0.010 percent and shall not contract in air more than 0.048 percent, except that

when cement is to be used for precast prestressed concrete piling, precast prestressed concrete members, or steam cured concrete products, the mortar shall not contract in air more than 0.053 percent.

- Type III and Type V portland cements shall conform to the requirements in ASTM Designation: C 150-02a and the additional requirements listed above for "Type II Modified" portland cement, except that when tested in conformance with California Test 527, mortar containing Type III portland cement shall not contract in air more than 0.075 percent.
- Cement used in the manufacture of cast-in-place concrete for exposed surfaces of like elements of a structure shall be from the same cement mill.
- Cement shall be protected from exposure to moisture until used. Sacked cement shall be piled to permit access for tally, inspection, and identification of each shipment.
- Adequate facilities shall be provided to assure that cement meeting the provisions specified in this Section 90-2.01 shall be kept separate from other cement in order to prevent any but the specified cement from entering the work. Safe and suitable facilities for sampling cement shall be provided at the weigh hopper or in the feed line immediately in advance of the hopper, in conformance with California Test 125.
- If cement is used prior to sampling and testing as provided in Section 6-1.07, "Certificates of Compliance," and the cement is delivered directly to the site of the work, the Certificate of Compliance shall be signed by the cement manufacturer or supplier of the cement. If the cement is used in ready-mixed concrete or in precast concrete products purchased as such by the Contractor, the Certificate of Compliance shall be signed by the manufacturer of the concrete or product.
- Cement furnished without a Certificate of Compliance shall not be used in the work until the Engineer has had sufficient time to make appropriate tests and has approved the cement for use.

**90-2.02 AGGREGATES**

- Aggregates shall be free from deleterious coatings, clay balls, roots, bark, sticks, rags, and other extraneous material.
- Natural aggregates shall be thoroughly and uniformly washed before use.
- The Contractor, at the Contractor's expense, shall provide safe and suitable facilities, including necessary splitting devices for obtaining samples of aggregates, in conformance with California Test 125.
- Aggregates shall be of such character that it will be possible to produce workable concrete within the limits of water content provided in Section 90-6.06, "Amount of Water and Penetration."
- Aggregates shall have not more than 10 percent loss when tested for soundness in conformance with the requirements in California Test 214. The soundness requirement for fine aggregate will be waived, provided that the durability index, $D_f$, of the fine aggregate is 60, or greater, when tested for durability in conformance with California Test 229.
- If the results of any one or more of the Cleanness Value, Sand Equivalent, or aggregate grading tests do not meet the requirements specified for "Operating Range" but all meet the "Contract Compliance" requirements, the placement of concrete shall be suspended at the completion of the current pour until tests or other information indicate that the next material to be used in the work will comply with the requirements specified for "Operating Range."
- If the results of either or both the Cleanness Value and coarse aggregate grading tests do not meet the requirements specified for "Contract Compliance," the concrete that is represented by the tests shall be removed. However, if the Engineer determines that the concrete is structurally adequate, the concrete may remain in place, and the Contractor shall pay to the State $4.60 per cubic meter for paving concrete and $7.20 per cubic meter for all other concrete for the concrete represented by these tests and left in place. The Department may deduct the amount from any moneys due, or that may become due, the Contractor under the contract.
- If the results of either or both the Sand Equivalent and fine aggregate grading tests do not meet the requirements specified for "Contract Compliance," the concrete which is represented by the tests shall be removed. However, if the Engineer determines that the concrete is structurally adequate, the concrete may remain in place, and the Contractor shall pay to the State $4.60 per cubic meter for paving concrete and $7.20 per cubic meter for all other concrete for the concrete represented by these tests and left in place. The Department may deduct the amount from any moneys due, or that may become due, the Contractor under the contract.
- The 2 preceding paragraphs apply individually to the "Contract Compliance" requirements for coarse aggregate and fine aggregate. When both coarse aggregate and fine aggregate do not conform to the "Contract Compliance" requirements, both paragraphs shall apply. The payments specified in those paragraphs shall be in addition to any payments made in conformance with the provisions in Section 90-1.01, "Description."
- No single Cleanness Value, Sand Equivalent or aggregate grading test shall represent more than 250 $m^3$ of concrete or one day's pour, whichever is smaller.
- When the source of an aggregate is changed, the Contractor shall adjust the mix proportions and submit in writing to the Engineer a copy of the mix design before using the aggregates.

**90-2.02A Coarse Aggregate**

• Coarse aggregate shall consist of gravel, crushed gravel, crushed rock, crushed air-cooled iron blast furnace slag or combinations thereof. Crushed air-cooled blast furnace slag shall not be used in reinforced or prestressed concrete.

• Coarse aggregate shall conform to the following quality requirements:

| Tests | California Test | Requirements |
|---|---|---|
| Loss in Los Angeles Rattler (after 500 revolutions) | 211 | 45% max. |
| Cleanness Value | | |
| Operating Range | 227 | 75 min. |
| Contract Compliance | 227 | 71 min. |

• In lieu of the above Cleanness Value requirements, a Cleanness Value "Operating Range" limit of 71, minimum, and a Cleanness Value "Contract Compliance" limit of 68, minimum, will be used to determine the acceptability of the coarse aggregate if the Contractor furnishes a Certificate of Compliance, as provided in Section 6-1.07, "Certificates of Compliance," certifying that:

1. coarse aggregate sampled at the completion of processing at the aggregate production plant had a Cleanness Value of not less than 82 when tested by California Test 227; and
2. prequalification tests performed in conformance with the requirements in California Test 549 indicated that the aggregate would develop a relative strength of not less than 95 percent and would have a relative shrinkage not greater than 105 percent, based on concrete.

**90-2.02B Fine Aggregate**

• Fine aggregate shall consist of natural sand, manufactured sand produced from larger aggregate or a combination thereof. Manufactured sand shall be well graded.

• Fine aggregate shall conform to the following quality requirements:

| Test | California Test | Requirements |
|---|---|---|
| Organic Impurities | 213 | Satisfactory[a] |
| Mortar Strengths Relative to Ottawa Sand | 515 | 95%, min. |
| Sand Equivalent: | | |
| Operating Range | 217 | 75, min. |
| Contract Compliance | 217 | 71, min. |

a Fine aggregate developing a color darker than the reference standard color solution may be accepted if it is determined by the Engineer, from mortar strength tests, that a darker color is acceptable.

• In lieu of the above Sand Equivalent requirements, a Sand Equivalent "Operating Range" limit of 71 minimum and a Sand Equivalent "Contract Compliance" limit of 68 minimum will be used to determine the acceptability of the fine aggregate if the Contractor furnishes a Certificate of Compliance, as provided in Section 6-1.07, "Certificates of Compliance," certifying that:

1. fine aggregate sampled at the completion of processing at the aggregate production plant had a Sand Equivalent value of not less than 82 when tested by California Test 217; and
2. prequalification tests performed in conformance with California Test 549 indicated that the aggregate would develop a relative strength of not less than 95 percent and would have a relative shrinkage not greater than 105 percent, based on concrete.

**90-2.03 WATER**

• In conventionally reinforced concrete work, the water for curing, for washing aggregates, and for mixing shall be free from oil and shall not contain more than 1000 parts per million of chlorides as Cl, when tested in conformance with California Test 422, nor more than 1300 parts per million of sulfates as $SO_4$, when tested in conformance with California Test 417. In prestressed concrete work, the water for curing, for washing aggregates, and for mixing shall be free from oil

and shall not contain more than 650 parts per million of chlorides as Cl, when tested in conformance with California Test 422, nor more than 1300 parts per million of sulfates as $SO_4$, when tested in conformance with California Test 417. In no case shall the water contain an amount of impurities that will cause either: 1) a change in the setting time of cement of more than 25 percent when tested in conformance with the requirements in ASTM Designation: C 191 or ASTM Designation: C 266 or 2) a reduction in the compressive strength of mortar at 14 days of more than 5 percent, when tested in conformance with the requirements in ASTM Designation: C 109, when compared to the results obtained with distilled water or deionized water, tested in conformance with the requirements in ASTM Designation: C 109.

- In non-reinforced concrete work, the water for curing, for washing aggregates and for mixing shall be free from oil and shall not contain more than 2000 parts per million of chlorides as Cl, when tested in conformance with California Test 422, or more than 1500 parts per million of sulfates as $SO_4$, when tested in conformance with California Test 417.
- In addition to the above provisions, water for curing concrete shall not contain impurities in a sufficient amount to cause discoloration of the concrete or produce etching of the surface.
- Water reclaimed from mixer wash-out operations may be used in mixing concrete. The water shall not contain coloring agents or more than 300 parts per million of alkalis ($Na_2O$ + 0.658 $K_2O$) as determined on the filtrate. The specific gravity of the water shall not exceed 1.03 and shall not vary more than ±0.010 during a day's operations.

### 90-2.04 ADMIXTURE MATERIALS

- Admixture materials shall conform to the requirements in the following ASTM Designations:

A. Chemical Admixtures—ASTM Designation: C 494.
B. Air-entraining Admixtures—ASTM Designation: C 260.
C. Calcium Chloride—ASTM Designation: D 98.
D. Mineral Admixtures—Coal fly ash; raw or calcined natural pozzolan as specified in ASTM Designation: C 618; silica fume conforming to the requirements in ASTM Designation: C 1240, with reduction of mortar expansion of 80 percent, minimum, using the cement from the proposed mix design.

- Unless otherwise specified in the special provisions, mineral admixtures shall be used in conformance with the provisions in Section 90-4.08, "Required Use of Mineral Admixtures."

## 90-3 AGGREGATE GRADINGS

### 90-3.01 GENERAL

- Before beginning concrete work, the Contractor shall submit in writing to the Engineer the gradation of the primary aggregate nominal sizes that the Contractor proposes to furnish. If a primary coarse aggregate or the fine aggregate is separated into 2 or more sizes, the proposed gradation shall consist of the gradation for each individual size, and the proposed proportions of each individual size, combined mathematically to indicate one proposed gradation. The proposed gradation shall meet the grading requirements shown in the table in this section, and shall show the percentage passing each of the sieve sizes used in determining the end result.
- The Engineer may waive, in writing, the gradation requirements in this Section 90-3.01 and in Sections 90-3.02, "Coarse Aggregate Grading," 90-3.03, "Fine Aggregate Grading," and 90-3.04, "Combined Aggregate Gradings," if, in the Engineer's opinion, furnishing the gradation is not necessary for the type or amount of concrete work to be constructed.
- Gradations proposed by the Contractor shall be within the following percentage passing limits:

| Primary Aggregate Nominal Size | Sieve Size | Limits of Proposed Gradation |
|---|---|---|
| 37.5-mm x 19-mm | 25-mm | 19 - 41 |
| 25-mm x 4.75-mm | 19-mm | 52 - 85 |
| 25-mm x 4.75-mm | 9.5-mm | 15 - 38 |
| 12.5-mm x 4.75-mm | 9.5-mm | 40 - 78 |
| 9.5-mm x 2.36-mm | 9.5-mm | 50 - 85 |
| Fine Aggregate | 1.18-mm | 55 - 75 |
| Fine Aggregate | 600-µm | 34 - 46 |
| Fine Aggregate | 300-µm | 16 - 29 |

- Should the Contractor change the source of supply, the Contractor shall submit in writing to the Engineer the new gradations before their intended use.

## 90-3.02 COARSE AGGREGATE GRADING

- The grading requirements for coarse aggregates are shown in the following table for each size of coarse aggregate:

| Sieve Sizes | Percentage Passing Primary Aggregate Nominal Sizes | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| | 37.5-mm x 19-mm | | 25-mm x 4.75-mm | | 12.5-mm x 4.75-mm | | 9.5-mm x 2.36-mm | |
| | Operating Range | Contract Compliance | Operating Range | Contract Compliance | Operating Range | Contract Compliance | Operating Range | Contract Compliance |
| 50-mm | 100 | 100 | — | — | — | — | — | — |
| 37.5-mm | 88-100 | 85-100 | 100 | 100 | — | — | — | — |
| 25-mm | x ± 18 | X ± 25 | 88-100 | 86-100 | — | — | — | — |
| 19-mm | 0-17 | 0-20 | X ± 15 | X ± 22 | 100 | 100 | — | — |
| 12.5-mm | — | — | — | — | 82-100 | 80-100 | 100 | 100 |
| 9.5-mm | 0-7 | 0-9 | X ± 15 | X ± 22 | X ± 15 | X ± 22 | X ± 15 | X ± 20 |
| 4.75-mm | — | — | 0-16 | 0-18 | 0-15 | 0-18 | 0-25 | 0-28 |
| 2.36-mm | — | — | 0-6 | 0-7 | 0-6 | 0-7 | 0-6 | 0-7 |

- In the above table, the symbol X is the gradation that the Contractor proposes to furnish for the specific sieve size as provided in Section 90-3.01, "General."
- Coarse aggregate for the 37.5-mm, maximum, combined aggregate grading as provided in Section 90-3.04, "Combined Aggregate Gradings," shall be furnished in 2 or more primary aggregate nominal sizes. Each primary aggregate nominal size may be separated into 2 sizes and stored separately, provided that the combined material conforms to the grading requirements for that particular primary aggregate nominal size.
- When the 25-mm, maximum, combined aggregate grading as provided in Section 90-3.04, "Combined Aggregate Gradings," is to be used, the coarse aggregate may be separated into 2 sizes and stored separately, provided that the combined material shall conform to the grading requirements for the 25-mm x 4.75-mm primary aggregate nominal size.

## 90-3.03 FINE AGGREGATE GRADING

- Fine aggregate shall be graded within the following limits:

| Sieve Sizes | Percentage Passing | |
|---|---|---|
| | Operating Range | Contract Compliance |
| 9.5-mm | 100 | 100 |
| 4.75-mm | 95-100 | 93-100 |
| 2.36-mm | 65-95 | 61-99 |
| 1.18-mm | X ± 10 | X ± 13 |
| 600-µm | X ± 9 | X ± 12 |
| 300-µm | X ± 6 | X ± 9 |
| 150-µm | 2-12 | 1-15 |
| 75-µm | 0-8 | 0-10 |

- In the above table, the symbol X is the gradation that the Contractor proposes to furnish for the specific sieve size as provided in Section 90-3.01, "General."
- In addition to the above required grading analysis, the distribution of the fine aggregate sizes shall be such that the difference between the total percentage passing the 1.18-mm sieve and the total percentage passing the 600-µm sieve shall be between 10 and 40, and the difference between the percentage passing the 600-µm and 300-µm sieves shall be between 10 and 40.
- Fine aggregate may be separated into 2 or more sizes and stored separately, provided that the combined material conforms to the grading requirements specified in this Section 90-3.03.

## 90-3.04 COMBINED AGGREGATE GRADINGS

- Combined aggregate grading limits shall be used only for the design of concrete mixes. Concrete mixes shall be designed so that aggregates are combined in proportions that shall produce a mixture within the grading limits for combined aggregates as specified herein.
- The combined aggregate grading, except when otherwise specified in these specifications or the special provisions, shall be either the 37.5-mm, maximum grading, or the 25-mm, maximum grading, at the option of the Contractor.

Grading Limits of Combined Aggregates

| Sieve Sizes | Percentage Passing | | | |
|---|---|---|---|---|
| | 37.5-mm Max. | 25-mm Max. | 12.5-mm Max. | 9.5-mm Max. |
| 50-mm | 100 | — | — | — |
| 37.5-mm | 90-100 | 100 | — | — |
| 25-mm | 50-86 | 90-100 | — | — |
| 19-mm | 45-75 | 55-100 | 100 | — |
| 12.5-mm | — | — | 90-100 | 100 |
| 9.5-mm | 38-55 | 45-75 | 55-86 | 50 - 100 |
| 4.75-mm | 30-45 | 35-60 | 45-63 | 45 - 63 |
| 2.36-mm | 23-38 | 27-45 | 35-49 | 35 - 49 |
| 1.18-mm | 17-33 | 20-35 | 25-37 | 25 - 37 |
| 600-µm | 10-22 | 12-25 | 15-25 | 15 - 25 |
| 300-µm | 4-10 | 5-15 | 5-15 | 5 - 15 |
| 150-µm | 1-6 | 1-8 | 1-8 | 1 - 8 |
| 75-µm | 0-3 | 0-4 | 0-4 | 0 - 4 |

- Changes from one grading to another shall not be made during the progress of the work unless permitted by the Engineer.

## 90-4 ADMIXTURES

### 90-4.01 GENERAL

- Admixtures used in portland cement concrete shall conform to and be used in conformance with the provisions in this Section 90-4 and the special provisions. Admixtures shall be used when specified or ordered by the Engineer and may be used at the Contractor's option as provided herein.
- Chemical admixtures and air-entraining admixtures containing chlorides as Cl in excess of one percent by mass of admixture, as determined by California Test 415, shall not be used in prestressed or reinforced concrete.
- Calcium chloride shall not be used in concrete except when otherwise specified.
- Mineral admixture used in concrete for exposed surfaces of like elements of a structure shall be from the same source and of the same percentage.
- Admixtures shall be uniform in properties throughout their use in the work. Should it be found that an admixture as furnished is not uniform in properties, its use shall be discontinued.
- If more than one admixture is used, the admixtures shall be compatible with each other so that the desirable effects of all admixtures used will be realized.

### 90-4.02 MATERIALS

- Admixture materials shall conform to the provisions in Section 90–2.04, "Admixture Materials."

### 90-4.03 ADMIXTURE APPROVAL

- No admixture brand shall be used in the work unless it is on the Department's current list of approved brands for the type of admixture involved.
- Admixture brands will be considered for addition to the approved list if the manufacturer of the admixture submits to the Transportation Laboratory a sample of the admixture accompanied by certified test results demonstrating that the admixture complies with the requirements in the appropriate ASTM Designation and these specifications. The sample shall be sufficient to permit performance of all required tests. Approval of admixture brands will be dependent upon a determination as to compliance with the requirements, based on the certified test results submitted, together with tests the Department may elect to perform.
- When the Contractor proposes to use an admixture of a brand and type on the current list of approved admixture brands, the Contractor shall furnish a Certificate of Compliance from the manufacturer, as provided in Section 6-1.07, "Certificates of Compliance," certifying that the admixture furnished is the same as that previously approved. If a previously approved admixture is not accompanied by a Certificate of Compliance, the admixture shall not be used in the work until the Engineer has had sufficient time to make the appropriate tests and has approved the admixture for use. The Engineer may take samples for testing at any time, whether or not the admixture has been accompanied by a Certificate of Compliance.
- If a mineral admixture is delivered directly to the site of the work, the Certificate of Compliance shall be signed by the manufacturer or supplier of the mineral admixture. If the mineral admixture is used in ready-mix concrete or in precast

concrete products purchased as such by the Contractor, the Certificate of Compliance shall be signed by the manufacturer of the concrete or product.

### 90-4.04 REQUIRED USE OF CHEMICAL ADMIXTURES AND CALCIUM CHLORIDE

- When the use of a chemical admixture or calcium chloride is specified, the admixture shall be used at the dosage specified, except that if no dosage is specified, the admixture shall be used at the dosage normally recommended by the manufacturer of the admixture.
- Calcium chloride shall be dispensed in liquid, flake, or pellet form. Calcium chloride dispensed in liquid form shall conform to the provisions for dispensing liquid admixtures in Section 90-4.10, "Proportioning and Dispensing Liquid Admixtures."

### 90-4.05 OPTIONAL USE OF CHEMICAL ADMIXTURES

- The Contractor will be permitted to use Type A or F, water-reducing; Type B, retarding; or Type D or G, water-reducing and retarding admixtures as described in ASTM Designation: C 494 to conserve cementitious material or to facilitate any concrete construction application subject to the following conditions:

A. When a water-reducing admixture or a water-reducing and retarding admixture is used, the cementitious material content specified or ordered may be reduced by a maximum of 5 percent by mass, except that the resultant cementitious material content shall be not less than 300 kilograms per cubic meter; and
B. When a reduction in cementitious material content is made, the dosage of admixture used shall be the dosage used in determining approval of the admixture.

- Unless otherwise specified, a Type C accelerating chemical admixture conforming to the requirements in ASTM Designation: C 494, may be used in portland cement concrete. Inclusion in the mix design submitted for approval will not be required provided that the admixture is added to counteract changing conditions that contribute to delayed setting of the portland cement concrete, and the use or change in dosage of the admixture is approved in writing by the Engineer.

### 90-4.06 REQUIRED USE OF AIR-ENTRAINING ADMIXTURES

- When air-entrainment is specified or ordered by the Engineer, the air-entraining admixture shall be used in amounts to produce a concrete having the specified air content as determined by California Test 504.

### 90-4.07 OPTIONAL USE OF AIR-ENTRAINING ADMIXTURES

- When air-entrainment has not been specified or ordered by the Engineer, the Contractor will be permitted to use an air-entraining admixture to facilitate the use of any construction procedure or equipment provided that the average air content, as determined by California Test 504, of 3 successive tests does not exceed 4 percent, and no single test value exceeds 5.5 percent. If the Contractor elects to use an air-entraining admixture in concrete for pavement, the Contractor shall so indicate at the time the Contractor designates the source of aggregate as provided in Section 40-1.015, "Cement Content."

### 90-4.08 REQUIRED USE OF MINERAL ADMIXTURES

- Unless otherwise specified, mineral admixture shall be combined with cement to make cementitious material.
- The calcium oxide content shall not exceed 10 percent when determined in conformance with the requirements in ASTM Designation: C 114. The available alkali content (as sodium oxide equivalent) shall not exceed 1.5 percent when determined in conformance with the requirements in ASTM Designation: C 311, or the total alkali content (as sodium oxide equivalent) shall not exceed 5.0 percent when determined in conformance with the requirements in ASTM Designation: D 4326.
- The amounts of cement and mineral admixture used in cementitious material shall be sufficient to satisfy the minimum cementitious material content requirements specified in Section 90-1.01, "Description," or Section 90-4.05, "Optional Use of Chemical Admixtures," and shall conform to the following:

A. The minimum amount of cement shall not be less than 75 percent by mass of the specified minimum cementitious material content;
B. The minimum amount of mineral admixture to be combined with cement shall be determined using one of the following criteria:

    1. When the calcium oxide content of a mineral admixture is equal to or less than 2 percent by mass, the amount of mineral admixture shall not be less than 15 percent by mass of the total amount of cementitious material to be used in the mix;

2. When the calcium oxide content of a mineral admixture is greater than 2 percent, the amount of mineral admixture shall not be less than 25 percent by mass of the total amount of cementitious material to be used in the mix;
3. When a mineral admixture that conforms to the provisions for silica fume in Section 90-2.04, "Admixture Materials," is used, the amount of mineral admixture shall not be less than 10 percent by mass of the total amount of cementitious material to be used in the mix

C. The total amount of mineral admixture shall not exceed 35 percent by mass of the total amount of cementitious material to be used in the mix. Where Section 90-1.01, "Description," specifies a maximum cementitious content in kilograms per cubic meter, the total mass of cement and mineral admixture per cubic meter shall not exceed the specified maximum cementitious material content.

**90-4.09 BLANK**

**90-4.10 PROPORTIONING AND DISPENSING LIQUID ADMIXTURES**

• Chemical admixtures and air-entraining admixtures shall be dispensed in liquid form. Dispensers for liquid admixtures shall have sufficient capacity to measure at one time the prescribed quantity required for each batch of concrete. Each dispenser shall include a graduated measuring unit into which liquid admixtures are measured to within ±5 percent of the prescribed quantity for each batch. Dispensers shall be located and maintained so that the graduations can be accurately read from the point at which proportioning operations are controlled to permit a visual check of batching accuracy prior to discharge. Each measuring unit shall be clearly marked for the type and quantity of admixture.

• Each liquid admixture dispensing system shall be equipped with a sampling device consisting of a valve located in a safe and readily accessible position such that a sample of the admixture may be withdrawn slowly by the Engineer.

• If more than one liquid admixture is used in the concrete mix, each liquid admixture shall have a separate measuring unit and shall be dispensed by injecting equipment located in such a manner that the admixtures are not mixed at high concentrations and do not interfere with the effectiveness of each other. When air-entraining admixtures are used in conjunction with other liquid admixtures, the air-entraining admixture shall be the first to be incorporated into the mix.

• When automatic proportioning devices are required for concrete pavement, dispensers for liquid admixtures shall operate automatically with the batching control equipment. The dispensers shall be equipped with an automatic warning system in good operating condition that will provide a visible or audible signal at the point at which proportioning operations are controlled when the quantity of admixture measured for each batch of concrete varies from the preselected dosage by more than 5 percent, or when the entire contents of the measuring unit are not emptied from the dispenser into each batch of concrete.

• Unless liquid admixtures are added to premeasured water for the batch, their discharge into the batch shall be arranged to flow into the stream of water so that the admixtures are well dispersed throughout the batch, except that air-entraining admixtures may be dispensed directly into moist sand in the batching bins provided that adequate control of the air content of the concrete can be maintained.

• Liquid admixtures requiring dosages greater than 2.5 L/m$^3$ shall be considered to be water when determining the total amount of free water as specified in Section 90-6.06, "Amount of Water and Penetration."

• Special admixtures, such as "high range" water reducers that may contribute to a high rate of slump loss, shall be measured and dispensed as recommended by the admixture manufacturer and as approved by the Engineer.

**90-4.11 STORAGE, PROPORTIONING, AND DISPENSING OF MINERAL ADMIXTURES**

• Mineral admixtures shall be protected from exposure to moisture until used. Sacked material shall be piled to permit access for tally, inspection and identification for each shipment.

• Adequate facilities shall be provided to assure that mineral admixtures meeting the specified requirements are kept separate from other mineral admixtures in order to prevent any but the specified mineral admixtures from entering the work. Safe and suitable facilities for sampling mineral admixtures shall be provided at the weigh hopper or in the feed line immediately in advance of the hopper.

• Mineral admixtures shall be incorporated into concrete using equipment conforming to the requirements for cement weigh hoppers, and charging and discharging mechanisms in ASTM Designation: C 94, in Section 90-5.03, "Proportioning," and in this Section 90-4.11.

• When concrete is completely mixed in stationary paving mixers, the mineral admixture shall be weighed in a separate weigh hopper conforming to the provisions for cement weigh hoppers and charging and discharging mechanisms in Section 90-5.03A, "Proportioning for Pavement," and the mineral admixture and cement shall be introduced simultaneously into the mixer proportionately with the aggregate. If the mineral admixture is not weighed in a separate weigh hopper, the Contractor shall provide certification that the stationary mixer is capable of mixing the cement, admixture, aggregates and water uniformly prior to discharge. Certification shall contain the following:

A. Test results for 2 compressive strength test cylinders of concrete taken within the first one-third and 2 compressive strength test cylinders of concrete taken within the last one-third of the concrete discharged from a single batch from the stationary paving mixer. Strength tests and cylinder preparation will be in conformance with the provisions of Section 90-9, "Compressive Strength;"
B. Calculations demonstrating that the difference in the averages of 2 compressive strengths taken in the first one-third is no greater than 7.5 percent different than the averages of 2 compressive strengths taken in the last one-third of the concrete discharged from a single batch from the stationary paving mixer. Strength tests and cylinder preparation will be in conformance with the provisions of Section 90-9, "Compressive Strength;" and
C. The mixer rotation speed and time of mixing prior to discharge that are required to produce a mix that meets the requirements above.

## 90-5 PROPORTIONING

### 90-5.01 STORAGE OF AGGREGATES

• Aggregates shall be stored or stockpiled in such a manner that separation of coarse and fine particles of each size shall be avoided and also that the various sizes shall not become intermixed before proportioning.

• Aggregates shall be stored or stockpiled and handled in a manner that shall prevent contamination by foreign materials. In addition, storage of aggregates at batching or mixing facilities that are erected subsequent to the award of the contract and that furnish concrete to the project shall conform to the following:

A. Intermingling of the different sizes of aggregates shall be positively prevented. The Contractor shall take the necessary measures to prevent intermingling. The preventive measures may include, but are not necessarily limited to, physical separation of stockpiles or construction of bulkheads of adequate length and height; and
B. Contamination of aggregates by contact with the ground shall be positively prevented. The Contractor shall take the necessary measures to prevent contamination. The preventive measures shall include, but are not necessarily limited to, placing aggregates on wooden platforms or on hardened surfaces consisting of portland cement concrete, asphalt concrete, or cement treated material.

• In placing aggregates in storage or in moving the aggregates from storage to the weigh hopper of the batching plant, any method that may cause segregation, degradation, or the combining of materials of different gradings that will result in any size of aggregate at the weigh hopper failing to meet the grading requirements, shall be discontinued. Any method of handling aggregates that results in excessive breakage of particles shall be discontinued. The use of suitable devices to reduce impact of falling aggregates may be required by the Engineer.

### 90-5.02 PROPORTIONING DEVICES

• Weighing, measuring, or metering devices used for proportioning materials shall conform to the requirements in Section 9-1.01, "Measurement of Quantities," and this Section 90-5.02. In addition, automatic weighing systems shall comply with the requirements for automatic proportioning devices in Section 90-5.03A, "Proportioning for Pavement." Automatic devices shall be automatic to the extent that the only manual operation required for proportioning the aggregates, cement, and mineral admixture for one batch of concrete is a single operation of a switch or starter.

• Proportioning devices shall be tested at the expense of the Contractor as frequently as the Engineer may deem necessary to ensure their accuracy.

• Weighing equipment shall be insulated against vibration or movement of other operating equipment in the plant. When the plant is in operation, the mass of each batch of material shall not vary from the mass designated by the Engineer by more than the tolerances specified herein.

• Equipment for cumulative weighing of aggregate shall have a zero tolerance of ±0.5 percent of the designated total batch mass of the aggregate. For systems with individual weigh hoppers for the various sizes of aggregate, the zero tolerance shall be ±0.5 percent of the individual batch mass designated for each size of aggregate. Equipment for cumulative weighing of cement and mineral admixtures shall have a zero tolerance of ±0.5 percent of the designated total batch mass of the cement and mineral admixture. Equipment for weighing cement or mineral admixture separately shall have a zero tolerance of ±0.5 percent of their designated individual batch masses. Equipment for measuring water shall have a zero tolerance of ±0.5 percent of its designated mass or volume.

• The mass indicated for any batch of material shall not vary from the preselected scale setting by more than the following:

A. Aggregate weighed cumulatively shall be within 1.0 percent of the designated total batch mass of the aggregate. Aggregates weighed individually shall be within 1.5 percent of their respective designated batch masses; and

B. Cement shall be within 1.0 percent of its designated batch mass. When weighed individually, mineral admixture shall be within 1.0 percent of its designated batch mass. When mineral admixture and cement are permitted to be weighed cumulatively, cement shall be weighed first to within 1.0 percent of its designated batch mass, and the total for cement and mineral admixture shall be within 1.0 percent of the sum of their designated batch masses; and
C. Water shall be within 1.5 percent of its designated mass or volume.

• Each scale graduation shall be approximately 0.001 of the total capacity of the scale. The capacity of scales for weighing cement, mineral admixture, or cement plus mineral admixture and aggregates shall not exceed that of commercially available scales having single graduations indicating a mass not exceeding the maximum permissible mass variation above, except that no scale shall be required having a capacity of less than 500 kg, with 0.5-kg graduations.

**90-5.03 PROPORTIONING**

• Proportioning shall consist of dividing the aggregates into the specified sizes, each stored in a separate bin, and combining them with cement, mineral admixture, and water as provided in these specifications. Aggregates shall be proportioned by mass.

• At the time of batching, aggregates shall have been dried or drained sufficiently to result in a stable moisture content such that no visible separation of water from aggregate will take place during transportation from the proportioning plant to the point of mixing. In no event shall the free moisture content of the fine aggregate at the time of batching exceed 8 percent of its saturated, surface-dry mass.

• Should separate supplies of aggregate material of the same size group, but of different moisture content or specific gravity or surface characteristics affecting workability, be available at the proportioning plant, withdrawals shall be made from one supply exclusively and the materials therein completely exhausted before starting upon another.

• Bulk "Type IP (MS) Modified" cement shall be weighed in an individual hopper and shall be kept separate from the aggregates until the ingredients are released for discharge into the mixer.

• Bulk cement and mineral admixture may be weighed in separate, individual weigh hoppers or may be weighed in the same weigh hopper and shall be kept separate from the aggregates until the ingredients are released for discharge into the mixer. If the cement and mineral admixture are weighed cumulatively, the cement shall be weighed first.

• When cement and mineral admixtures are weighed in separate weigh hoppers**,** the weigh systems for the proportioning of the aggregate, the cement, and the mineral admixture shall be individual and distinct from all other weigh systems. Each weigh system shall be equipped with a hopper, a lever system, and an indicator to constitute an individual and independent material weighing device. The cement and the mineral admixture shall be discharged into the mixer simultaneously with the aggregate.

• The scales and weigh hoppers for bulk weighing cement, mineral admixture, or cement plus mineral admixture shall be separate and distinct from the aggregate weighing equipment.

• For batches with a volume of one cubic meter or more, the batching equipment shall conform to one of the following combinations:

A. Separate boxes and separate scale and indicator for weighing each size of aggregate.
B. Single box and scale indicator for all aggregates.
C. Single box or separate boxes and automatic weighing mechanism for all aggregates.

• In order to check the accuracy of batch masses, the gross mass and tare mass of batch trucks, truck mixers, truck agitators, and non-agitating hauling equipment shall be determined when ordered by the Engineer. The equipment shall be weighed at the Contractor's expense on scales designated by the Engineer.

**90-5.03A Proportioning for Pavement**

• Aggregates and bulk cement, mineral admixture, and cement plus mineral admixture for use in pavement shall be proportioned by mass by means of automatic proportioning devices of approved type conforming to these specifications.

• The Contractor shall install and maintain in operating condition an electronically actuated moisture meter that will indicate, on a readily visible scale, changes in the moisture content of the fine aggregate as it is batched within a sensitivity of 0.5 percent by mass of the fine aggregate.

• The batching of cement, mineral admixture, or cement plus mineral admixture and aggregate shall be interlocked so that a new batch cannot be started until all weigh hoppers are empty, the proportioning devices are within zero tolerance, and the discharge gates are closed. The interlock shall permit no part of the batch to be discharged until all aggregate hoppers and the cement and mineral admixture hoppers or the cement plus mineral admixture hopper are charged with masses that are within the tolerances specified in Section 90-5.02, "Proportioning Devices."

• When interlocks are required for cement and mineral admixture charging mechanisms and cement and mineral admixtures are weighed cumulatively, their charging mechanisms shall be interlocked to prevent the introduction of mineral

admixture until the mass of cement in the cement weigh hopper is within the tolerances specified in Section 90-5.02, "Proportioning Devices."

- The discharge gate on the cement and mineral admixture hoppers or the cement plus mineral admixture hopper shall be designed to permit regulating the flow of cement, mineral admixture, or cement plus mineral admixture into the aggregate as directed by the Engineer.
- When separate weigh boxes are used for each size of aggregate, the discharge gates shall permit regulating the flow of each size of aggregate as directed by the Engineer.
- Material discharged from the several bins shall be controlled by gates or by mechanical conveyors. The means of withdrawal from the several bins, and of discharge from the weigh box, shall be interlocked so that not more than one bin can discharge at a time, and so that the weigh box cannot be tripped until the required quantity from each of the several bins has been deposited therein. Should a separate weigh box be used for each size of aggregate, all may be operated and discharged simultaneously.
- When the discharge from the several bins is controlled by gates, each gate shall be actuated automatically so that the required mass is discharged into the weigh box, after which the gate shall automatically close and lock.
- The automatic weighing system shall be designed so that all proportions required may be set on the weighing controller at the same time.

## 90-6 MIXING AND TRANSPORTING

### 90-6.01 GENERAL

- Concrete shall be mixed in mechanically operated mixers, except that when permitted by the Engineer, batches not exceeding 0.25 $m^3$ may be mixed by hand methods in conformance with the provisions in Section 90-6.05, "Hand-Mixing."
- Equipment having components made of aluminum or magnesium alloys that would have contact with plastic concrete during mixing, transporting, or pumping of portland cement concrete shall not be used.
- Concrete shall be homogeneous and thoroughly mixed, and there shall be no lumps or evidence of undispersed cement, mineral admixture, or cement plus mineral admixture.
- Uniformity of concrete mixtures will be determined by differences in penetration as determined by California Test 533, or slump as determined by ASTM Designation: C 143, and by variations in the proportion of coarse aggregate as determined by California Test 529.
- When the mix design specifies a penetration value, the difference in penetration, determined by comparing penetration tests on 2 samples of mixed concrete from the same batch or truck mixer load, shall not exceed 10 mm. When the mix design specifies a slump value, the difference in slump, determined by comparing slump tests on 2 samples of mixed concrete from the same batch or truck mixer load, shall not exceed the values given in the table below. Variation in the proportion of coarse aggregate will be determined by comparing the results of tests of 2 samples of mixed concrete from the same batch or truck mixer load and the difference between the 2 results shall not exceed 100 kg per cubic meter of concrete.

| Average Slump | Maximum Permissible Difference |
|---|---|
| Less than 100-mm | 25-mm |
| 100-mm to 150-mm | 38-mm |
| Greater than 150-mm to 225-mm | 50-mm |

- The Contractor, at the Contractor's expense, shall furnish samples of the freshly mixed concrete and provide satisfactory facilities for obtaining the samples.

### 90-6.02 MACHINE MIXING

- Concrete mixers may be of the revolving drum or the revolving blade type, and the mixing drum or blades shall be operated uniformly at the mixing speed recommended by the manufacturer. Mixers and agitators that have an accumulation of hard concrete or mortar shall not be used.
- The temperature of mixed concrete, immediately before placing, shall be not less than 10°C or more than 32°C. Aggregates and water shall be heated or cooled as necessary to produce concrete within these temperature limits. Neither aggregates nor mixing water shall be heated to exceed 65°C. If ice is used to cool the concrete, discharge of the mixer will not be permitted until all ice is melted.
- The batch shall be so charged into the mixer that some water will enter in advance of cementitious materials and aggregates. All water shall be in the drum by the end of the first one-fourth of the specified mixing time.
- Cementitious materials shall be batched and charged into the mixer by means that will not result either in loss of cementitious materials due to the effect of wind, in accumulation of cementitious materials on surfaces of conveyors or hoppers, or in other conditions that reduce or vary the required quantity of cementitious material in the concrete mixture.

- Paving and stationary mixers shall be operated with an automatic timing device. The timing device and discharge mechanism shall be interlocked so that during normal operation no part of the batch will be discharged until the specified mixing time has elapsed.
- The total elapsed time between the intermingling of damp aggregates and all cementitious materials and the start of mixing shall not exceed 30 minutes.
- The size of batch shall not exceed the manufacturer's guaranteed capacity.
- When producing concrete for pavement or base, suitable batch counters shall be installed and maintained in good operating condition at jobsite batching plants and stationary mixers. The batch counters shall indicate the exact number of batches proportioned and mixed.
- Concrete shall be mixed and delivered to the jobsite by means of one of the following combinations of operations:

A. Mixed completely in a stationary mixer and the mixed concrete transported to the point of delivery in truck agitators or in non-agitating hauling equipment (central-mixed concrete).
B. Mixed partially in a stationary mixer, and the mixing completed in a truck mixer (shrink-mixed concrete).
C. Mixed completely in a truck mixer (transit-mixed concrete).
D. Mixed completely in a paving mixer.

- Agitators may be truck mixers operating at agitating speed or truck agitators. Each mixer and agitator shall have attached thereto in a prominent place a metal plate or plates on which is plainly marked the various uses for which the equipment is designed, the manufacturer's guaranteed capacity of the drum or container in terms of the volume of mixed concrete and the speed of rotation of the mixing drum or blades.
- Truck mixers shall be equipped with electrically or mechanically actuated revolution counters by which the number of revolutions of the drum or blades may readily be verified.
- When shrink-mixed concrete is furnished, concrete that has been partially mixed at a central plant shall be transferred to a truck mixer and all requirements for transit-mixed concrete shall apply. No credit in the number of revolutions at mixing speed shall be allowed for partial mixing in a central plant.

**90-6.03 TRANSPORTING MIXED CONCRETE**

- Mixed concrete may be transported to the delivery point in truck agitators or truck mixers operating at the speed designated by the manufacturer of the equipment as agitating speed, or in non-agitating hauling equipment, provided the consistency and workability of the mixed concrete upon discharge at the delivery point is suitable for adequate placement and consolidation in place, and provided the mixed concrete after hauling to the delivery point conforms to the provisions in Section 90-6.01, "General."
- Truck agitators shall be loaded not to exceed the manufacturer's guaranteed capacity and shall maintain the mixed concrete in a thoroughly mixed and uniform mass during hauling.
- Bodies of non-agitating hauling equipment shall be constructed so that leakage of the concrete mix, or any part thereof, will not occur at any time.
- Concrete hauled in open-top vehicles shall be protected during hauling against rain or against exposure to the sun for more than 20 minutes when the ambient temperature exceeds 24°C.
- No additional mixing water shall be incorporated into the concrete during hauling or after arrival at the delivery point, unless authorized by the Engineer. If the Engineer authorizes additional water to be incorporated into the concrete, the drum shall be revolved not less than 30 revolutions at mixing speed after the water is added and before discharge is commenced.
- The rate of discharge of mixed concrete from truck mixer-agitators shall be controlled by the speed of rotation of the drum in the discharge direction with the discharge gate fully open.
- When a truck mixer or agitator is used for transporting concrete to the delivery point, discharge shall be completed within 1.5 hours or before 250 revolutions of the drum or blades, whichever occurs first, after the introduction of the cement to the aggregates. Under conditions contributing to quick stiffening of the concrete, or when the temperature of the concrete is 30°C or above, the time allowed may be less than 1.5 hours.
- When non-agitating hauling equipment is used for transporting concrete to the delivery point, discharge shall be completed within one hour after the addition of the cement to the aggregates. Under conditions contributing to quick stiffening of the concrete, or when the temperature of the concrete is 30°C or above, the time between the introduction of cement to the aggregates and discharge shall not exceed 45 minutes.
- Each load of concrete delivered at the jobsite shall be accompanied by a weighmaster certificate showing the mix identification number, non-repeating load number, date and time at which the materials were batched, the total amount of water added to the load, and for transit-mixed concrete, the reading of the revolution counter at the time the truck mixer is charged with cement. This weighmaster certificate shall also show the actual scale masses (kilograms) for the ingredients batched. Theoretical or target batch masses shall not be used as a substitute for actual scale masses.

• Weighmaster certificates shall be provided in printed form, or if approved by the Engineer, the data may be submitted in electronic media. Electronic media shall be presented in a tab-delimited format on a 90 mm diskette with a capacity of at least 1.4 megabytes. Captured data, for the ingredients represented by each batch shall be "line feed, carriage return" (LFCR) and "one line, separate record" with allowances for sufficient fields to satisfy the amount of data required by these specifications.

• The Contractor may furnish a weighmaster certificate accompanied by a separate certificate that lists the actual batch masses or measurements for a load of concrete provided that both certificates are imprinted with the same non-repeating load number that is unique to the contract and delivered to the jobsite with the load.

• Weighmaster certificates furnished by the Contractor shall conform to the provisions in Section 9-1.01, "Measurement of Quantities."

**90-6.04 TIME OR AMOUNT OF MIXING**

• Mixing of concrete in paving or stationary mixers shall continue for the required mixing time after all ingredients, except water and admixture, if added with the water, are in the mixing compartment of the mixer before any part of the batch is released. Transfer time in multiple drum mixers shall not be counted as part of the required mixing time.

• The required mixing time, in paving or stationary mixers, of concrete used for concrete structures, except minor structures, shall be not less than 90 seconds or more than 5 minutes, except that when directed by the Engineer in writing, the requirements of the following paragraph shall apply.

• The required mixing time, in paving or stationary mixers, except as provided in the preceding paragraph, shall be not less than 50 seconds or more than 5 minutes.

• The minimum required revolutions at the mixing speed for transit-mixed concrete shall not be less than that recommended by the mixer manufacturer, but in no case shall the number of revolutions be less than that required to consistently produce concrete conforming to the provisions for uniformity in Section 90-6.01, "General."

**90-6.05 HAND-MIXING**

• Hand-mixed concrete shall be made in batches of not more than 0.25 $m^3$ and shall be mixed on a watertight, level platform. The proper amount of coarse aggregate shall be measured in measuring boxes and spread on the platform and the fine aggregate shall be spread on this layer, the 2 layers being not more than 0.3 meters in total depth. On this mixture shall be spread the dry cement and mineral admixture and the whole mass turned no fewer than 2 times dry; then sufficient clean water shall be added, evenly distributed, and the whole mass again turned no fewer than 3 times, not including placing in the carriers or forms.

**90-6.06 AMOUNT OF WATER AND PENETRATION**

• The amount of water used in concrete mixes shall be regulated so that the penetration of the concrete as determined by California Test 533 or the slump of the concrete as determined by ASTM Designation: C 143 is within the "Nominal" values shown in the following table. When the penetration or slump of the concrete is found to exceed the nominal values listed, the mixture of subsequent batches shall be adjusted to reduce the penetration or slump to a value within the nominal range shown. Batches of concrete with a penetration or slump exceeding the maximum values listed shall not be used in the work. When Type F or Type G chemical admixtures are added to the mix, the penetration requirements shall not apply and the slump shall not exceed 225 mm after the chemical admixtures are added.

| Type of Work | Nominal | | Maximum | |
|---|---|---|---|---|
| | Penetration (mm) | Slump (mm) | Penetration (mm) | Slump (mm) |
| Concrete Pavement | 0-25 | — | 40 | — |
| Non-reinforced concrete facilities | 0-35 | — | 50 | — |
| Reinforced concrete structures | | | | |
| Sections over 300-mm thick | 0-35 | — | 65 | — |
| Sections 300-mm thick or less | 0-50 | — | 75 | — |
| Concrete placed under water | — | 150-200 | — | 225 |
| Cast-in-place concrete piles | 65-90 | 130-180 | 100 | 200 |

• The amount of free water used in concrete shall not exceed 183 $kg/m^3$, plus 20 kg for each required 100 kg of cementitious material in excess of 325 $kg/m^3$.

• The term free water is defined as the total water in the mixture minus the water absorbed by the aggregates in reaching a saturated surface-dry condition.

• Where there are adverse or difficult conditions that affect the placing of concrete, the above specified penetration and free water content limitations may be exceeded providing the Contractor is granted permission by the Engineer in writing to increase the cementitious material content per cubic meter of concrete. The increase in water and cementitious material shall be at a ratio not to exceed 30 kg of water per added 100 kg of cementitious material per cubic meter. The cost of additional cementitious material and water added under these conditions shall be at the Contractor's expense and no additional compensation will be allowed therefor.

• The equipment for supplying water to the mixer shall be constructed and arranged so that the amount of water added can be measured accurately. Any method of discharging water into the mixer for a batch shall be accurate within 1.5 percent of the quantity of water required to be added to the mix for any position of the mixer. Tanks used to measure water shall be designed so that water cannot enter while water is being discharged into the mixer and discharge into the mixer shall be made rapidly in one operation without dribbling. All equipment shall be arranged so as to permit checking the amount of water delivered by discharging into measured containers.

## 90-7 CURING CONCRETE

### 90-7.01 METHODS OF CURING

• Newly placed concrete shall be cured by the methods specified in this Section 90-7.01 and the special provisions.

#### 90-7.01A Water Method

• The concrete shall be kept continuously wet by the application of water for a minimum curing period of 7 days after the concrete has been placed.

• When a curing medium consisting of cotton mats, rugs, carpets, or earth or sand blankets is to be used to retain the moisture, the entire surface of the concrete shall be kept damp by applying water with a nozzle that so atomizes the flow that a mist and not a spray is formed, until the surface of the concrete is covered with the curing medium. The moisture from the nozzle shall not be applied under pressure directly upon the concrete and shall not be allowed to accumulate on the concrete in a quantity sufficient to cause a flow or wash the surface. At the expiration of the curing period, the concrete surfaces shall be cleared of all curing mediums.

• At the option of the Contractor, a curing medium consisting of white opaque polyethylene sheeting extruded onto burlap may be used to cure concrete structures. The polyethylene sheeting shall have a minimum thickness of 100 µm, and shall be extruded onto 283.5 gram burlap.

• At the option of the Contractor, a curing medium consisting of polyethylene sheeting may be used to cure concrete columns. The polyethylene sheeting shall have a minimum thickness of 250 µm achieved in a single layer of material.

• If the Contractor chooses to use polyethylene sheeting or polyethylene sheeting on burlap as a curing medium as specified above, these mediums and any joints therein shall be secured as necessary to provide moisture retention and shall be within 75 mm of the concrete at all points along the surface being cured. When these mediums are used, the temperature of the concrete shall be monitored during curing. If the temperature of the concrete cannot be maintained below 60°C, this method of curing shall be discontinued, and one of the other curing methods allowed for the concrete shall be used.

• When concrete bridge decks and flat slabs are to be cured without the use of a curing medium, the entire surface of the bridge deck or slab shall be kept damp by the application of water with an atomizing nozzle as specified in the preceding paragraph, until the concrete has set, after which the entire surface of the concrete shall be sprinkled continuously with water for a period of not less than 7 days.

#### 90-7.01B Curing Compound Method

• Surfaces of the concrete that are exposed to the air shall be sprayed uniformly with a curing compound.

• Curing compounds to be used shall be as follows:

1. Pigmented curing compound conforming to the requirements in ASTM Designation: C 309, Type 2, Class B, except the resin type shall be poly-alpha-methylstyrene.
2. Pigmented curing compound conforming to the requirements in ASTM Designation: C 309, Type 2, Class B.
3. Pigmented curing compound conforming to the requirements in ASTM Designation: C 309, Type 2, Class A.
4. Non-pigmented curing compound conforming to the requirements in ASTM Designation: C 309, Type 1, Class B.
5. Non-pigmented curing compound conforming to the requirements in ASTM Designation: C 309, Type 1, Class A.
6. Non-pigmented curing compound with fugitive dye conforming to the requirements in ASTM Designation: C 309, Type 1-D, Class A.

• The infrared scan for the dried vehicle from curing compound (1) shall match the infrared scan on file at the Transportation Laboratory.

- The loss of water for each type of curing compound, when tested in conformance with the requirements in California Test 534, shall not be more than 0.15-kg/$m^2$ in 24 hours.
- The curing compound to be used will be specified elsewhere in these specifications or in the special provisions.
- When the use of curing compound is required or permitted elsewhere in these specifications or in the special provisions and no specific kind is specified, any of the curing compounds listed above may be used.
- Curing compound shall be applied at a nominal rate of 3.7 $m^2$/L, unless otherwise specified.
- At any point, the application rate shall be within ±1.2 $m^2$/L of the nominal rate specified, and the average application rate shall be within ±0.5 $m^2$/L of the nominal rate specified when tested in conformance with the requirements in California Test 535. Runs, sags, thin areas, skips, or holidays in the applied curing compound shall be evidence that the application is not satisfactory.
- Curing compounds shall be applied using power operated spray equipment. The power operated spraying equipment shall be equipped with an operational pressure gage and a means of controlling the pressure. Hand spraying of small and irregular areas that are not reasonably accessible to mechanical spraying equipment, in the opinion of the Engineer, may be permitted.
- The curing compound shall be applied to the concrete following the surface finishing operation, immediately before the moisture sheen disappears from the surface, but before any drying shrinkage or craze cracks begin to appear. In the event of any drying or cracking of the surface, application of water with an atomizing nozzle as specified in Section 90-7.01A, "Water Method," shall be started immediately and shall be continued until application of the compound is resumed or started; however, the compound shall not be applied over any resulting freestanding water. Should the film of compound be damaged from any cause before the expiration of 7 days after the concrete is placed in the case of structures and 72 hours in the case of pavement, the damaged portion shall be repaired immediately with additional compound.
- At the time of use, compounds containing pigments shall be in a thoroughly mixed condition with the pigment uniformly dispersed throughout the vehicle. A paddle shall be used to loosen all settled pigment from the bottom of the container, and a power driven agitator shall be used to disperse the pigment uniformly throughout the vehicle.
- Agitation shall not introduce air or other foreign substance into the curing compound.
- The manufacturer shall include in the curing compound the necessary additives for control of sagging, pigment settling, leveling, de-emulsification, or other requisite qualities of a satisfactory working material. Pigmented curing compounds shall be manufactured so that the pigment does not settle badly, does not cake or thicken in the container, and does not become granular or curdled. Settlement of pigment shall be a thoroughly wetted, soft, mushy mass permitting the complete and easy vertical penetration of a paddle. Settled pigment shall be easily redispersed, with minimum resistance to the sideways manual motion of the paddle across the bottom of the container, to form a smooth uniform product of the proper consistency.
- Curing compounds shall remain sprayable at temperatures above 4°C and shall not be diluted or altered after manufacture.
- The curing compound shall be packaged in clean 1040-L totes, 210-L barrels

or 19-L pails shall be supplied from a suitable storage tank located at the jobsite. The containers shall comply with "Title 49, Code of Federal Regulations, Hazardous Materials Regulations." The 1040-L totes and the 210-L barrels shall have removable lids and airtight fasteners. The 19-L pails shall be round and have standard full open head and bail. Lids with bungholes shall not be permitted. Settling or separation of solids in containers, except tanks, must be completely redispersed with low speed mixing prior to use, in conformance with these specifications and the manufacturer's recommendations. Mixing shall be accomplished either manually by use of a paddle or by use of a mixing blade driven by a drill motor, at low speed. Mixing blades shall be the type used for mixing paint. On site storage tanks shall be kept clean and free of contaminants. Each tank shall have a permanent system designed to completely redisperse settled material without introducing air or other foreign substances.

- Steel containers and lids shall be lined with a coating that will prevent destructive action by the compound or chemical agents in the air space above the compound. The coating shall not come off the container or lid as skins. Containers shall be filled in a manner that will prevent skinning. Plastic containers shall not react with the compound.
- Each container shall be labeled with the manufacturer's name, kind of curing compound, batch number, volume, date of manufacture, and volatile organic compound (VOC) content. The label shall also warn that the curing compound containing pigment shall be well stirred before use. Precautions concerning the handling and the application of curing compound shall be shown on the label of the curing compound containers in conformance with the Construction Safety Orders and General Industry Safety Orders of the State of California.
- Containers of curing compound shall be labeled to indicate that the contents fully comply with the rules and regulations concerning air pollution control in the State of California.
- When the curing compound is shipped in tanks or tank trucks, a shipping invoice shall accompany each load. The invoice shall contain the same information as that required herein for container labels.
- Curing compound will be sampled by the Engineer at the source of supply or at the jobsite or at both locations.

• Curing compound shall be formulated so as to maintain the specified properties for a minimum of one year. The Engineer may require additional testing before use to determine compliance with these specifications if the compound has not been used within one year or whenever the Engineer has reason to believe the compound is no longer satisfactory.

• Tests will be conducted in conformance with the latest ASTM test methods and methods in use by the Transportation Laboratory.

**90-7.01C Waterproof Membrane Method**

• The exposed finished surfaces of concrete shall be sprayed with water, using a nozzle that so atomizes the flow that a mist and not a spray is formed, until the concrete has set, after which the curing membrane shall be placed. The curing membrane shall remain in place for a period of not less than 72 hours.

• Sheeting material for curing concrete shall conform to the requirements in AASHTO Designation: M 171 for white reflective materials.

• The sheeting material shall be fabricated into sheets of such width as to provide a complete cover for the entire concrete surface. Joints in the sheets shall be securely cemented together in such a manner as to provide a waterproof joint. The joint seams shall have a minimum lap of 100 mm.

• The sheets shall be securely weighted down by placing a bank of earth on the edges of the sheets or by other means satisfactory to the Engineer.

• Should any portion of the sheets be broken or damaged before the expiration of 72 hours after being placed, the broken or damaged portions shall be immediately repaired with new sheets properly cemented into place.

• Sections of membrane that have lost their waterproof qualities or have been damaged to such an extent as to render them unfit for curing the concrete shall not be used.

**90-7.01D Forms-In-Place Method**

• Formed surfaces of concrete may be cured by retaining the forms in place. The forms shall remain in place for a minimum period of 7 days after the concrete has been placed, except that for members over 0.5-m in least dimension the forms shall remain in place for a minimum period of 5 days.

• Joints in the forms and the joints between the end of forms and concrete shall be kept moisture tight during the curing period. Cracks in the forms and cracks between the forms and the concrete shall be resealed by methods subject to the approval of the Engineer.

**90-7.02 CURING PAVEMENT**

• The entire exposed area of the pavement, including edges, shall be cured by the waterproof membrane method, or curing compound method using curing compound (1) or (2) as the Contractor may elect. Should the side forms be removed before the expiration of 72 hours following the start of curing, the exposed pavement edges shall also be cured. If the pavement is cured by means of the curing compound method, the sawcut and all portions of the curing compound that have been disturbed by sawing operations shall be restored by spraying with additional curing compound.

• Curing shall commence as soon as the finishing process provided in Section 40-1.10, "Final Finishing," has been completed. The method selected shall conform to the provisions in Section 90-7.01, "Methods of Curing."

• When the curing compound method is used, the compound shall be applied to the entire pavement surface by mechanical sprayers. Spraying equipment shall be of the fully atomizing type equipped with a tank agitator that provides for continual agitation of the curing compound during the time of application. The spray shall be adequately protected against wind, and the nozzles shall be so oriented or moved mechanically transversely as to result in the minimum specified rate of coverage being applied uniformly on exposed faces. Hand spraying of small and irregular areas, and areas inaccessible to mechanical spraying equipment, in the opinion of the Engineer, will be permitted. When the ambient air temperature is above 15°C, the Contractor shall fog the surface of the concrete with a fine spray of water as specified in Section 90-7.01A, "Water Method." The surface of the pavement shall be kept moist between the hours of 10:00 a.m. and 4:30 p.m. on the day the concrete is placed. However, the fogging done after the curing compound has been applied shall not begin until the compound has set sufficiently to prevent displacement. Fogging shall be discontinued if ordered in writing by the Engineer.

**90-7.03 CURING STRUCTURES**

• Newly placed concrete for cast-in-place structures, other than highway bridge decks, shall be cured by the water method, the forms-in-place method, or, as permitted herein, by the curing compound method, in conformance with the provisions in Section 90-7.01, "Methods of Curing."

• The curing compound method using a pigmented curing compound may be used on concrete surfaces of construction joints, surfaces that are to be buried underground, and surfaces where only Ordinary Surface Finish is to be applied and on which a uniform color is not required and that will not be visible from a public traveled way. If the Contractor elects to use the curing compound method on the bottom slab of box girder spans, the curing compound shall be curing compound (1).

• The top surface of highway bridge decks shall be cured by both the curing compound method and the water method. The curing compound shall be curing compound (1).

• Concrete surfaces of minor structures, as defined in Section 51-1.02, "Minor Structures," shall be cured by the water method, the forms-in-place method or the curing compound method.

• When deemed necessary by the Engineer during periods of hot weather, water shall be applied to concrete surfaces being cured by the curing compound method or by the forms-in-place method, until the Engineer determines that a cooling effect is no longer required. Application of water for this purpose will be paid for as extra work as provided in Section 4-1.03D, "Extra Work."

**90-7.04 CURING PRECAST CONCRETE MEMBERS**

• Precast concrete members shall be cured in conformance with any of the methods specified in Section 90-7.01, "Methods of Curing." Curing shall be provided for the minimum time specified for each method or until the concrete reaches its design strength, whichever is less. Steam curing may also be used for precast members and shall conform to the following provisions:

A. After placement of the concrete, members shall be held for a minimum 4-hour presteaming period. If the ambient air temperature is below 10°C, steam shall be applied during the presteaming period to hold the air surrounding the member at a temperature between 10°C and 32°C.
B. To prevent moisture loss on exposed surfaces during the presteaming period, members shall be covered as soon as possible after casting or the exposed surfaces shall be kept wet by fog spray or wet blankets.
C. Enclosures for steam curing shall allow free circulation of steam about the member and shall be constructed to contain the live steam with a minimum moisture loss. The use of tarpaulins or similar flexible covers will be permitted, provided they are kept in good repair and secured in such a manner as to prevent the loss of steam and moisture.
D. Steam at the jets shall be at low pressure and in a saturated condition. Steam jets shall not impinge directly on the concrete, test cylinders, or forms. During application of the steam, the temperature rise within the enclosure shall not exceed 22°C per hour. The curing temperature throughout the enclosure shall not exceed 65°C and shall be maintained at a constant level for a sufficient time necessary to develop the required transfer strength. Control cylinders shall be covered to prevent moisture loss and shall be placed in a location where temperature is representative of the average temperature of the enclosure.
E. Temperature recording devices that will provide an accurate, continuous, permanent record of the curing temperature shall be provided. A minimum of one temperature recording device per 60 m of continuous bed length will be required for checking temperature.
F. Members in pretension beds shall be detensioned immediately after the termination of steam curing while the concrete and forms are still warm, or the temperature under the enclosure shall be maintained above 15°C until the stress is transferred to the concrete.
G. Curing of precast concrete will be considered completed after termination of the steam curing cycle.

**90-7.05 CURING PRECAST PRESTRESSED CONCRETE PILES**

• Newly placed concrete for precast prestressed concrete piles shall be cured in conformance with the provisions in Section 90-7.04, "Curing Precast Concrete Members," except that piles in a corrosive environment shall be cured as follows:

A. Piles shall be either steam cured or water cured. If water curing is used, the piles shall be kept continuously wet by the application of water in conformance with the provisions in Section 90-7.01A, "Water Method."
B. If steam curing is used, the steam curing provisions in Section 90-7.04, "Curing Precast Concrete Members," shall apply except that the piles shall be kept continuously wet for their entire length for a period of not less than 3 days, including the holding and steam curing periods.

**90-7.06 CURING SLOPE PROTECTION**

• Concrete slope protection shall be cured in conformance with any of the methods specified in Section 90-7.01, "Methods of Curing."

• Concreted-rock slope protection shall be cured in conformance with any of the methods specified in Section 90-7.01, "Methods of Curing," or with a blanket of earth kept wet for 72 hours, or by sprinkling with a fine spray of water every 2 hours during the daytime for a period of 3 days.

**90-7.07 CURING MISCELLANEOUS CONCRETE WORK**

• Exposed surfaces of curbs shall be cured by pigmented curing compounds as specified in Section 90-7.01B, "Curing Compound Method."

• Concrete sidewalks, gutter depressions, island paving, curb ramps, driveways, and other miscellaneous concrete areas shall be cured in conformance with any of the methods specified in Section 90-7.01, "Methods of Curing."

• Shotcrete shall be cured for at least 72 hours by spraying with water, or by a moist earth blanket, or by any of the methods provided in Section 90-7.01, "Methods of Curing."

• Mortar and grout shall be cured by keeping the surface damp for 3 days.

• After placing, the exposed surfaces of sign structure foundations, including pedestal portions, if constructed, shall be cured for at least 72 hours by spraying with water, or by a moist earth blanket, or by any of the methods provided in Section 90-7.01, "Methods of Curing."

## 90-8 PROTECTING CONCRETE

### 90-8.01 GENERAL

• In addition to the provisions in Section 7-1.16, "Contractor's Responsibility for the Work and Materials," the Contractor shall protect concrete as provided in this Section 90-8.

• Concrete shall not be placed on frozen or ice-coated ground or subgrade nor on ice-coated forms, reinforcing steel, structural steel, conduits, precast members, or construction joints.

• Under rainy conditions, placing of concrete shall be stopped before the quantity of surface water is sufficient to damage surface mortar or cause a flow or wash of the concrete surface, unless the Contractor provides adequate protection against damage.

• Concrete that has been frozen or damaged by other causes, as determined by the Engineer, shall be removed and replaced by the Contractor at the Contractor's expense.

### 90-8.02 PROTECTING CONCRETE STRUCTURES

• Structure concrete and shotcrete used as structure concrete shall be maintained at a temperature of not less than 7°C for 72 hours after placing and at not less than 4°C for an additional 4 days. When required by the Engineer, the Contractor shall submit a written outline of the proposed methods for protecting the concrete.

### 90-8.03 PROTECTING CONCRETE PAVEMENT

• Pavement concrete shall be maintained at a temperature of not less than 4°C for 72 hours. When required by the Engineer, the Contractor shall submit a written outline of the proposed methods for protecting the concrete.

• Except as provided in Section 7-1.08, "Public Convenience," the Contractor shall protect concrete pavement against construction and other activities that abrade, scar, discolor, reduce texture depth, lower coefficient of friction, or otherwise damage the surface. Stockpiling, drifting, or excessive spillage of soil, gravel, petroleum products, and concrete or asphalt mixes on the surface of concrete pavement is prohibited unless otherwise specified in these specifications, the special provisions or permitted by the Engineer.

• When ordered by the Engineer or shown on the plans or specified in the special provisions, pavement crossings shall be constructed for the convenience of public traffic. The material and work necessary for the construction of the crossings, and their subsequent removal and disposal, will be paid for at the contract unit prices for the items of work involved and if there are no contract items for the work involved, payment for pavement crossings will be made by extra work as provided in Section 4-1.03D, "Extra Work.". Where public traffic will be required to cross over the new pavement, Type III portland cement may be used in concrete, if permitted in writing by the Engineer. The pavement may be opened to traffic as soon as the concrete has developed a modulus of rupture of 3.8 MPa. The modulus of rupture will be determined by California Test 523.

• No traffic or Contractor's equipment, except as hereinafter provided, will be permitted on the pavement before a period of 10 days has elapsed after the concrete has been placed, nor before the concrete has developed a modulus of rupture of at least 3.8 MPa. Concrete that fails to attain a modulus of rupture of 3.8 MPa within 10 days shall not be opened to traffic until directed by the Engineer.

• Equipment for sawing weakened plane joints will be permitted on the pavement as specified in Section 40-1.08B, "Weakened Plane Joints."

• When requested in writing by the Contractor, the tracks on one side of paving equipment will be permitted on the pavement after a modulus of rupture of 2.4 MPa has been attained, provided that:

A. Unit pressure exerted on the pavement by the paver shall not exceed 135 kPa;
B. Tracks with cleats, grousers, or similar protuberances shall be modified or shall travel on planks or equivalent protective material, so that the pavement is not damaged; and
C. No part of the track shall be closer than 0.3-m from the edge of pavement.

• In case of visible cracking of, or other damage to the pavement, operation of the paving equipment on the pavement shall be immediately discontinued.

• Damage to the pavement resulting from early use of pavement by the Contractor's equipment as provided above shall be repaired by the Contractor at the Contractor's expense.

• The State will furnish the molds and machines for testing the concrete for modulus of rupture, and the Contractor, at the Contractor's expense, shall furnish the material and whatever labor the Engineer may require.

## 90-9 COMPRESSIVE STRENGTH

### 90-9.01 GENERAL

• Concrete compressive strength requirements consist of a minimum strength that shall be attained before various loads or stresses are applied to the concrete and, for concrete designated by strength, a minimum strength at the age of 28 days or at the age otherwise allowed in Section 90-1.01, "Description." The various strengths required are specified in these specifications or the special provisions or are shown on the plans.

• The compressive strength of concrete will be determined from test cylinders that have been fabricated from concrete sampled in conformance with the requirements of California Test 539. Test cylinders will be molded and initially field cured in conformance with California Test 540. Test cylinders will be cured and tested after receipt at the testing laboratory in conformance with the requirements of California Test 521. A strength test shall consist of the average strength of 2 cylinders fabricated from material taken from a single load of concrete, except that, if any cylinder should show evidence of improper sampling, molding, or testing, that cylinder shall be discarded and the strength test shall consist of the strength of the remaining cylinder.

• When concrete compressive strength is specified as a prerequisite to applying loads or stresses to a concrete structure or member, test cylinders for other than steam cured concrete will be cured in conformance with Method 1 of California Test 540. The compressive strength of concrete determined for these purposes will be evaluated on the basis of individual tests.

• When concrete is designated by 28-day compressive strength rather than by cementitious material content, the concrete strength to be used as a basis for acceptance of other than steam cured concrete will be determined from cylinders cured in conformance with Method 1 of California Test 540. If the result of a single compressive strength test at the maximum age specified or allowed is below the specified strength but is 95 percent or more of the specified strength, the Contractor shall, at the Contractor's expense, make corrective changes, subject to approval of the Engineer, in the mix proportions or in the concrete fabrication procedures, before placing additional concrete, and shall pay to the State $14 for each in-place cubic meter of concrete represented by the deficient test. If the result of a single compressive strength test at the maximum age specified or allowed is below 95 percent of the specified strength, but is 85 percent or more of the specified strength, the Contractor shall make the corrective changes specified above, and shall pay to the State $20 for each in place cubic meter of concrete represented by the deficient test. In addition, such corrective changes shall be made when the compressive strength of concrete tested at 7 days indicates, in the judgment of the Engineer, that the concrete will not attain the required compressive strength at the maximum age specified or allowed. Concrete represented by a single test that indicates a compressive strength of less than 85 percent of the specified 28-day compressive strength will be rejected in conformance with the provisions in Section 6-1.04, "Defective Materials."

• If the test result indicates that the compressive strength at the maximum curing age specified or allowed is below the specified strength, but is 85 percent or more of the specified strength, payments to the State as required above shall be made, unless the Contractor, at the Contractor's expense, obtains and submits evidence acceptable to the Engineer that the strength of the concrete placed in the work meets or exceeds the specified 28-day compressive strength. If the test result indicates a compressive strength at the maximum curing age specified or allowed below 85 percent, the concrete represented by that test will be rejected, unless the Contractor, at the Contractor's expense, obtains and submits evidence acceptable to the Engineer that the strength and quality of the concrete placed in the work are acceptable. If the evidence consists of tests made on cores taken from the work, the cores shall be obtained and tested in conformance with the requirements in ASTM Designation: C 42.

• No single compressive strength test shall represent more than 250 $m^3$.

• When a precast concrete member is steam cured, the compressive strength of the concrete will be determined from test cylinders that have been handled and stored in conformance with Method 3 of California Test 540. The compressive strength of steam cured concrete will be evaluated on the basis of individual tests representing specific portions of production. When the concrete is designated by 28-day compressive strength rather than by cementitious material content, the concrete shall be considered to be acceptable whenever its compressive strength reaches the specified 28-day compressive strength provided that strength is reached in not more than the maximum number of days specified or allowed after the member is cast.

• When concrete is specified by compressive strength, prequalification of materials, mix proportions, mixing equipment, and procedures proposed for use will be required prior to placement of the concrete. Prequalification shall be

accomplished by the submission of acceptable certified test data or trial batch reports by the Contractor. Prequalification data shall be based on the use of materials, mix proportions, mixing equipment, procedures, and size of batch proposed for use in the work.

- Certified test data, in order to be acceptable, shall indicate that not less than 90 percent of at least 20 consecutive tests exceed the specified strength at the maximum number of cure days specified or allowed, and none of those tests are less than 95 percent of specified strength. Strength tests included in the data shall be the most recent tests made on concrete of the proposed mix design and all shall have been made within one year of the proposed use of the concrete.
- Trial batch test reports, in order to be acceptable, shall indicate that the average compressive strength of 5 consecutive concrete cylinders, taken from a single batch, at not more than 28 days (or the maximum age allowed) after molding shall be at least 4 MPa greater than the specified 28-day compressive strength, and no individual cylinder shall have a strength less than the specified strength at the maximum age specified or allowed. Data contained in the report shall be from trial batches that were produced within one year of the proposed use of specified strength concrete in the project. Whenever air-entrainment is required, the air content of trial batches shall be equal to or greater than the air content specified for the concrete without reduction due to tolerances.
- Tests shall be performed in conformance with either the appropriate California Test methods or the comparable ASTM test methods. Equipment employed in testing shall be in good condition and shall be properly calibrated. If the tests are performed during the life of the contract, the Engineer shall be notified sufficiently in advance of performing the tests in order to witness the test procedures.
- The certified test data and trial batch test reports shall include the following information:

A. Date of mixing.
B. Mixing equipment and procedures used.
C. The size of batch in cubic meters and the mass, type, and source of all ingredients used.
D. Penetration of the concrete.
E. The air content of the concrete if an air-entraining admixture is used.
F. The age at time of testing and strength of all concrete cylinders tested.

- Certified test data and trial batch test reports shall be signed by an official of the firm that performed the tests.
- When approved by the Engineer, concrete from trial batches may be used in the work at locations where concrete of a lower quality is required and the concrete will be paid for as the type or class of concrete required at that location.
- After materials, mix proportions, mixing equipment, and procedures for concrete have been prequalified for use, additional prequalification by testing of trial batches will be required prior to making changes that, in the judgment of the Engineer, could result in a strength of concrete below that specified.
- The Contractor's attention is directed to the time required to test trial batches and the Contractor shall be responsible for production of trial batches at a sufficiently early date so that the progress of the work is not delayed.
- When precast concrete members are manufactured at the plant of an established manufacturer of precast concrete members, the mix proportions of the concrete shall be determined by the Contractor, and a trial batch and prequalification of the materials, mix proportions, mixing equipment, and procedures will not be required.

## 90-10 MINOR CONCRETE

### 90-10.01 GENERAL

- Concrete for minor structures, slope paving, curbs, sidewalks and other concrete work, when designated as minor concrete on the plans, in the specifications, or in the contract item, shall conform to the provisions specified herein.
- The Engineer, at the Engineer's discretion, will inspect and test the facilities, materials and methods for producing the concrete to ensure that minor concrete of the quality suitable for use in the work is obtained.

### 90-10.02 MATERIALS

- Minor concrete shall conform to the following requirements:

#### 90-10.02A Cementitious Material

- Cementitious material shall conform to the provisions in Section 90-1.01, "Description."

#### 90-10.02B Aggregate

- Aggregate shall be clean and free from deleterious coatings, clay balls, roots, and other extraneous materials.

- The Contractor shall submit to the Engineer for approval, a grading of the combined aggregate proposed for use in the minor concrete. After acceptance of the grading, aggregate furnished for minor concrete shall conform to that grading, unless a change is authorized in writing by the Engineer.
- The Engineer may require the Contractor to furnish periodic test reports of the aggregate grading furnished. The maximum size of aggregate used shall be at the option of the Contractor, but in no case shall the maximum size be larger than 37.5 mm or smaller than 19 mm.
- The Engineer may waive, in writing, the gradation requirements in this Section 90-10.02B, if, in the Engineer's opinion, the furnishing of the gradation is not necessary for the type or amount of concrete work to be constructed.

**90-10.02C Water**

- Water used for washing, mixing, and curing shall be free from oil, salts, and other impurities that would discolor or etch the surface or have an adverse affect on the quality of the concrete.

**90-10.02D Admixtures**

- The use of admixtures shall conform to the provisions in Section 90-4, "Admixtures."

## 90-10.03 PRODUCTION

- Cementitious material, water, aggregate, and admixtures shall be stored, proportioned, mixed, transported, and discharged in conformance with recognized standards of good practice that will result in concrete that is thoroughly and uniformly mixed, that is suitable for the use intended, and that conforms to requirements specified herein. Recognized standards of good practice are outlined in various industry publications such as are issued by American Concrete Institute, AASHTO, or the Department.
- The cementitious material content of minor concrete shall conform to the provisions in Section 90-1.01, "Description."
- The amount of water used shall result in a consistency of concrete conforming to the provisions in Section 90-6.06, "Amount of Water and Penetration." Additional mixing water shall not be incorporated into the concrete during hauling or after arrival at the delivery point, unless authorized by the Engineer.
- Discharge of ready-mixed concrete from the transporting vehicle shall be made while the concrete is still plastic and before stiffening occurs. An elapsed time of 1.5 hours (one hour in non-agitating hauling equipment), or more than 250 revolutions of the drum or blades, after the introduction of the cementitious material to the aggregates, or a temperature of concrete of more than 32°C will be considered conditions contributing to the quick stiffening of concrete. The Contractor shall take whatever action is necessary to eliminate quick stiffening, except that the addition of water will not be permitted.
- The required mixing time in stationary mixers shall be not less than 50 seconds or more than 5 minutes.
- The minimum required revolutions at mixing speed for transit-mixed concrete shall be not less than that recommended by the mixer manufacturer, and shall be increased, if necessary, to produce thoroughly and uniformly mixed concrete.
- Each load of ready-mixed concrete shall be accompanied by a weighmaster certificate that shall be delivered to the Engineer at the discharge location of the concrete, unless otherwise directed by the Engineer. The weighmaster certificate shall be clearly marked with the date and time of day when the load left the batching plant and, if hauled in truck mixers or agitators, the time the mixing cycle started.
- A Certificate of Compliance conforming to the provisions in Section 6–1.07, "Certificates of Compliance," shall be furnished to the Engineer, prior to placing minor concrete from a source not previously used on the contract, stating that minor concrete to be furnished meets contract requirements, including minimum cementitious material content specified.

## 90-10.04 CURING MINOR CONCRETE

- Curing minor concrete shall conform to the provisions in Section 90-7, "Curing Concrete."

## 90-10.05 PROTECTING MINOR CONCRETE

- Protecting minor concrete shall conform to the provisions in Section 90-8, "Protecting Concrete," except the concrete shall be maintained at a temperature of not less than 4°C for 72 hours after placing.

## 90-10.06 MEASUREMENT AND PAYMENT

- Minor concrete will be measured and paid for in conformance with the provisions specified in the various sections of these specifications covering concrete construction when minor concrete is specified in the specifications, shown on the plans, or indicated by contract item in the Engineer's Estimate.

## 90-11 MEASUREMENT AND PAYMENT

### 90-11.01 MEASUREMENT

- Portland cement concrete will be measured in conformance with the provisions specified in the various sections of these specifications covering construction requiring concrete.
- When it is provided that concrete will be measured at the mixer, the volume in cubic meters shall be computed as the total mass of the batch in kilograms divided by the density of the concrete in kilograms per cubic meter. The total mass of the batch shall be calculated as the sum of all materials, including water, entering the batch. The density of the concrete will be determined in conformance with the requirements in California Test 518.

### 90-11.02 PAYMENT

- Portland cement concrete will be paid for in conformance with the provisions specified in the various sections of these specifications covering construction requiring concrete.
- Full compensation for furnishing and incorporating admixtures required by these specifications or the special provisions will be considered as included in the contract prices paid for the concrete involved and no additional compensation will be allowed therefor.
- Should the Engineer order the Contractor to incorporate any admixtures in the concrete when their use is not required by these specifications or the special provisions, furnishing the admixtures and adding them to the concrete will be paid for as extra work as provided in Section 4-1.03D, "Extra Work."
- Should the Contractor use admixtures in conformance with the provisions in Section 90-4.05, "Optional Use of Chemical Admixtures," or Section 90-4.07, "Optional Use of Air-entraining Admixtures," or should the Contractor request and obtain permission to use other admixtures for the Contractor's benefit, the Contractor shall furnish those admixtures and incorporate them into the concrete at the Contractor's expense and no additional compensation will be allowed therefor.

# END OF AMENDMENTS

## SECTION 2. PROPOSAL REQUIREMENTS AND CONDITIONS

### 2-1.01 GENERAL

The bidder's attention is directed to the provisions in Section 2, "Proposal Requirements and Conditions," of the Standard Specifications and these special provisions for the requirements and conditions which the bidder must observe in the preparation of the Proposal form and the submission of the bid.

In addition to the subcontractors required to be listed in conformance with Section 2-1.054, "Required Listing of Proposed Subcontractors," of the Standard Specifications, each proposal shall have listed therein the portion of work that will be performed by each subcontractor listed.

The proposal shall set forth in clearly legible figures and in the respective spaces provided:

A. Unit Prices
B. Item Totals
C. TOTAL BID (A)
D. Number of working days bid for completion of the work, except plant establishment
E. TOTAL BID (B) - product of the working days bid and the cost per day shown on the Engineer's Estimate
F. TOTAL BASIS FOR COMPARISON OF BIDS (A+B)

The proposal shall be signed by the bidder, who shall fill out the blanks in the proposal form as therein required.

The Bidder's Bond form mentioned in the last paragraph in Section 2-1.07, "Proposal Guaranty," of the Standard Specifications will be found following the signature page of the Proposal.

The amount of the bidder's security required in Section 2-1.07, "Proposal Guaranty," of the Standard Specifications shall be based on the "TOTAL BID (A)" set forth on the proposal form.

Submit request for substitution of an "or equal" item, and the data substantiating the request to the Department of Transportation, Submit request for substitution of an "or equal" item, and the data substantiating the request to the Department of Transportation, 464 W. Fourth Street, San Bernandino, CA 92401-1400, so that the request is received by the Department by close of business on the fourth day, not including Saturdays, Sundays and legal holidays, following bid opening.

In conformance with Public Contract Code Section 7106, a Noncollusion Affidavit is included in the Proposal. Signing the Proposal shall also constitute signature of the Noncollusion Affidavit.

The contractor, sub recipient or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR part 26 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the recipient deems appropriate. Each subcontract signed by the bidder must include this assurance.

Failure of the bidder to fulfill the requirements of the Special Provisions for submittals required to be furnished after bid opening, including but not limited to DBE or DVBE submittals, or escrowed bid documents, where applicable, may subject the bidder to a determination of the bidder's responsibility in the event it is the apparent low bidder on a future public works contracts.

**2-1.015 FEDERAL LOBBYING RESTRICTIONS**

Section 1352, Title 31, United States Code prohibits Federal funds from being expended by the recipient or any lower tier subrecipient of a Federal-aid contract to pay for any person for influencing or attempting to influence a Federal agency or Congress in connection with the awarding of any Federal-aid contract, the making of any Federal grant or loan, or the entering into of any cooperative agreement.

If any funds other than Federal funds have been paid for the same purposes in connection with this Federal-aid contract, the recipient shall submit an executed certification and, if required, submit a completed disclosure form as part of the bid documents.

A certification for Federal-aid contracts regarding payment of funds to lobby Congress or a Federal agency is included in the Proposal. Standard Form - LLL, "Disclosure of Lobbying Activities," with instructions for completion of the Standard Form is also included in the Proposal. Signing the Proposal shall constitute signature of the Certification.

The above-referenced certification and disclosure of lobbying activities shall be included in each subcontract and any lower-tier contracts exceeding $100,000. All disclosure forms, but not certifications, shall be forwarded from tier to tier until received by the Engineer.

The Contractor, subcontractors and any lower-tier contractors shall file a disclosure form at the end of each calendar quarter in which there occurs any event that requires disclosure or that materially affects the accuracy of the information contained in any disclosure form previously filed by the Contractor, subcontractors and any lower-tier contractors. An event that materially affects the accuracy of the information reported includes:

A. A cumulative increase of $25,000 or more in the amount paid or expected to be paid for influencing or attempting to influence a covered Federal action; or
B. A change in the person(s) or individual(s) influencing or attempting to influence a covered Federal action; or,
C. A change in the officer(s), employee(s), or Member(s) contacted to influence or attempt to influence a covered Federal action.

**2-1.02 DISADVANTAGED BUSINESS ENTERPRISE (DBE)**

This project is subject to Part 26, Title 49, Code of Federal Regulations entitled "Participation by Disadvantaged Business Enterprises in Department of Transportation Financial Assistance Programs." The Regulations in their entirety are incorporated herein by this reference.

Bidders shall be fully informed respecting the requirements of the Regulations and the Department's Disadvantaged Business Enterprise (DBE) program developed pursuant to the Regulations; particular attention is directed to the following matters:

A. A DBE must be a small business concern as defined pursuant to Section 3 of U.S. Small Business Act and relevant regulations promulgated pursuant thereto.
B. A DBE may participate as a prime contractor, subcontractor, joint venture partner with a prime or subcontractor, vendor of material or supplies, or as a trucking company.
C. A DBE bidder, not bidding as a joint venture with a non-DBE, will be required to document one or a combination of the following:

    1. The bidder will meet the goal by performing work with its own forces.
    2. The bidder will meet the goal through work performed by DBE subcontractors, suppliers or trucking companies.
    3. The bidder, prior to bidding, made adequate good faith efforts to meet the goal.

D. A DBE joint venture partner must be responsible for specific contract items of work, or portions thereof. Responsibility means actually performing, managing and supervising the work with its own forces. The DBE joint venture partner must share in the capital contribution, control, management, risks and profits of the joint venture. The DBE joint venturer must submit the joint venture agreement with the proposal or the DBE Information form required in the Section entitled "Submission of DBE Information" of these special provisions.

E. A DBE must perform a commercially useful function, i.e., must be responsible for the execution of a distinct element of the work and must carry out its responsibility by actually performing, managing and supervising the work.

F. DBEs must be certified by the California Unified Certification Program (CUCP).

G. Credit for materials or supplies purchased from DBEs will be as follows:

1. If the materials or supplies are obtained from a DBE manufacturer, 100 percent of the cost of the materials or supplies will count toward the DBE goal. A DBE manufacturer is a firm that operates or maintains a factory or establishment that produces, on the premises, the materials, supplies, articles, or equipment required under the contract and of the general character described by the specifications.
2. If the materials or supplies are purchased from a DBE regular dealer, 60 percent of the cost of the materials or supplies will count toward the DBE goal. A DBE regular dealer is a firm that owns, operates, or maintains a store, warehouse, or other establishment in which the materials, supplies, articles or equipment of the general character described by the specifications and required under the contract are bought, kept in stock, and regularly sold or leased to the public in the usual course of business. To be a DBE regular dealer, the firm must be an established, regular business that engages, as its principal business and under its own name, in the purchase and sale or lease of the products in question. A person may be a DBE regular dealer in such bulk items as petroleum products, steel, cement, gravel, stone, or asphalt without owning, operating, or maintaining a place of business as provided in this paragraph G.2. if the person both owns and operates distribution equipment for the products. Any supplementing of regular dealers' own distribution equipment shall be by a long-term lease agreement and not on an ad hoc or contract-by-contract basis. Packagers, brokers, manufacturers' representatives, or other persons who arrange or expedite transactions are not DBE regular dealers within the meaning of this paragraph G.2.
3. Credit for materials or supplies purchased from a DBE which is neither a manufacturer nor a regular dealer will be limited to the entire amount of fees or commissions charged for assistance in the procurement of the materials and supplies, or fees or transportation charges for the delivery of materials or supplies required on a job site, provided the fees are reasonable and not excessive as compared with fees charged for similar services.

H. Credit for DBE trucking companies will be as follows:

1. The DBE must be responsible for the management and supervision of the entire trucking operation for which it is responsible on a particular contract, and there cannot be a contrived arrangement for the purpose of meeting the DBE goal.
2. The DBE must itself own and operate at least one fully licensed, insured, and operational truck used on the contract.
3. The DBE receives credit for the total value of the transportation services it provides on the contract using trucks its owns, insures, and operates using drivers it employs.
4. The DBE may lease trucks from another DBE firm, including an owner-operator who is certified as a DBE. The DBE who leases trucks from another DBE receives credit for the total value of the transportation services the lessee DBE provides on the contract.
5. The DBE may also lease trucks from a non-DBE firm, including an owner-operator. The DBE who leases trucks from a non-DBE is entitled to credit only for the fee or commission it receives as a result of the lease arrangement. The DBE does not receive credit for the total value of the transportation services provided by the lessee, since these services are not provided by a DBE.
6. For the purposes of this paragraph H, a lease must indicate that the DBE has exclusive use of and control over the truck. This does not preclude the leased truck from working for others during the term of the lease with the consent of the DBE, so long as the lease gives the DBE absolute priority for use of the leased truck. Leased trucks must display the name and identification number of the DBE.

I. Noncompliance by the Contractor with the requirements of the regulations constitutes a breach of this contract and may result in termination of the contract or other appropriate remedy for a breach of this contract.

J. Bidders are encouraged to use services offered by financial institutions owned and controlled by DBEs.

The following firms provide assistance to DBEs:

1. GCAP Sacramento Service Center
   1326 North Market Blvd.
   Sacramento, CA 95834-1912
   Phone: (916) 565-4164
   FAX: (916) 565-4356
   Email: lheringer@gcapservices.com

2. GCAP Oakland Service Center
   1330 Broadway, Suite 930
   Oakland, CA 94612-2508
   Phone: (510) 874-7877
   FAX: (510) 832-2829
   Email: bdiplanroom@aol.com

3. Padilla & Associates - Commerce
   5675 East Telegraph Rd., Suite A-260
   Commerce, CA 90040
   Phone: (323) 728-8847
   FAX: (323) 728-8867

4. Padilla & Associates – San Diego
   2725 Congress Street, Suite 1D
   San Diego, CA 92110
   Phone: (619) 725-0843
   FAX: (619) 725-0854

**2-1.02A DBE GOAL FOR THIS PROJECT**

The Department has established the following goal for Disadvantaged Business Enterprise (DBE) participation for this project:

Disadvantaged Business Enterprise (DBE): 8 percent

It is the bidder's responsibility to confirm that the firm is DBE certified as of the date of bid opening. Listings of DBEs certified by the CUCP are available from the following sources:

1. The Department's DBE Directory. This Directory may be obtained from the Department of Transportation, Materiel Operations Branch, Publication Distribution Unit, 1900 Royal Oaks Drive, Sacramento, California 95815, Telephone: (916) 445-3520.
2. The Department's web site at http://www.dot.ca.gov/hq/bep.

**2-1.02B SUBMISSION OF DBE INFORMATION**

The required DBE information shall be submitted on the "CALTRANS BIDDER - DBE INFORMATION" forms included in the Proposal. If the DBE information is not submitted with the bid, the DBE information forms shall be removed from the Proposal prior to submitting the bid.

Failure to submit the required DBE information within the time specified herein will be grounds for finding the bid nonresponsive.

Where the bidder has not met the designated DBE goal, it must submit good faith efforts (GFE) documentation within the time specified herein to establish that, prior to the bid, it made adequate good faith efforts to meet the goal.

Bidders are cautioned that even though their "CALTRANS BIDDER - DBE INFORMATION" form indicates they will meet the stated DBE goal, they should also submit their GFE documentation, within the time specified herein, to protect their eligibility for award of the contract in the event the Department, in its review, finds that the goal has not been met.

If DBE information is not submitted with the bid, the apparent successful bidder (low bidder), the second low bidder and the third low bidder shall complete and submit DBE information to the Department of Transportation, 1120 N Street, Room 0200, MS #26, Sacramento, California 95814 so the information is received by the Department no later than 4:00 p.m. ON THE FOURTH DAY, not including Saturdays, Sundays and legal holidays, following bid opening. DBE information sent by U.S. Postal Service certified mail with return receipt and certificate of mailing and mailed on or before the third day, not including Saturdays, Sundays and legal holidays, following bid opening will be accepted even if it is received after the fourth day following bid opening. Other bidders need not submit DBE information unless requested to do so by the Department. When a request is made by the Department, the DBE information of the other bidders shall be received by the Department within 4 days of the request, not including Saturdays, Sundays and legal holidays, unless a later time is authorized by the Department.

If it is determined that GFE documentation is needed to determine a bidder's eligibility for award, failure of the bidder to have submitted the GFE documentation by the time specified herein will be grounds for finding the bid or proposal nonresponsive.

It is the bidder's responsibility to make enough work available to DBEs and to select those portions of the work or material needs consistent with the available DBEs to meet the goal for DBE participation.

The bidder's "CALTRANS BIDDER - DBE INFORMATION" form shall include the names, addresses and phone numbers of DBE firms that will participate, with a complete description of work or supplies to be provided by each, and the dollar value of each DBE transaction. When 100 percent of a contract item of work is not to be performed or furnished by a DBE, a description of the exact portion of that work to be performed or furnished by that DBE shall be included in the DBE information, including the planned location of that work. The work that a DBE prime contractor has committed to performing with its own forces as well as the work that it has committed to be performed by DBE subcontractors, suppliers and trucking companies will count toward the goal.

The bidder shall submit written confirmation from each DBE that the DBE is participating in the contract, and include the confirmation with the submittal of the bid or with the submittal of the required DBE information. A copy of a DBE's quote will serve as written confirmation that the DBE is participating in the contract.

The bidder's good faith effort (GFE) documentation shall establish that good faith efforts to meet the DBE goal have been made.

In order to establish the bidder's good faith efforts to meet the DBE goal, the bidder should include the following information and supporting documents, as necessary:

A. Items of work the bidder has made available to DBE firms. Identify those items of work the bidder might otherwise perform with its own forces and those items that have been broken down into economically feasible units to facilitate DBE participation. For each item listed, show the dollar value and percentage of the total contract. It is the bidder's responsibility to demonstrate that sufficient work to meet the goal was made available to DBE firms.
B. The names of certified DBEs and the dates on which they were solicited to bid on the project. Include the items of work offered. Describe the methods used for following up initial solicitations to determine with certainty if the DBEs were interested, and the dates of the follow-up. Attach supporting documents such as copies of letters, memos, facsimiles sent, telephone logs, telephone billing statements, and other evidence of solicitation. Bidders are reminded to solicit certified DBEs through all reasonable and available means and provide sufficient time to allow DBEs to respond.
C. For each item of work made available, the DBEs that provided quotes, the selected firm and its status as a DBE, the price quote for each firm, and the name, address and telephone number for each firm. If the firm selected for the item is not a DBE, provide the reasons for the selection.
D. The names and dates of each publication in which a request for DBE participation for the project was placed by the bidder. Attach copies of the published advertisements.
E. The names of agencies and the dates on which they were contacted to provide assistance in contacting, recruiting and using DBE firms. If the agencies were contacted in writing, provide copies of supporting documents.
F. Descriptions of the efforts made to provide interested DBEs with adequate information about the plans, specifications and requirements of the contract to assist them in responding to a solicitation. Where the bidder has provided information, identify the name of the DBE assisted, the nature of the information provided, and date of contact. Provide copies of supporting documents, as appropriate.
G. Descriptions of any and all efforts made to assist interested DBEs in obtaining bonding, lines of credit, insurance, necessary equipment, supplies, and materials (excluding supplies and equipment which the DBE subcontractor purchases or leases from the prime contractor or its affiliate). Where such assistance was provided by the bidder, identify the name of the DBE assisted, nature of the assistance offered, and date. Provide copies of supporting documents, as appropriate.
H. Any additional data to support a demonstration of good faith efforts.

## SECTION 3. AWARD AND EXECUTION OF CONTRACT

The bidder's attention is directed to the provisions in Section 3, "Award and Execution of Contract," of the Standard Specifications and these special provisions for the requirements and conditions concerning award and execution of contract.

Bid protests are to be delivered to the following address: Department of Transportation, MS 43, Attn: Office Engineer, 1727 30th Street, Sacramento, CA 95816 or by facsimile to the Office Engineer at (916) 227-6282.

Bids will be compared on the basis of the Engineer's Estimate of the quantities of work to be done and the number of working days bid for completion of the work, except plant establishment. The award of the contract, if it be awarded, will be to the lowest responsible bidder whose proposal complies with all the requirements prescribed and who has met the goal for DBE participation or has demonstrated, to the satisfaction of the Department, adequate good faith efforts to do so. Meeting the goal for DBE participation or demonstrating, to the satisfaction of the Department, adequate good faith efforts to do so is a condition for being eligible for award of contract. The lowest bid will be determined on the basis of the "Total Basis for Comparison of Bids (A+B)" set forth in the proposal. The contract price for the awarded contract will be the "Total Bid (A)" set forth in the proposal.

Bids in which the number of working days bid for completion of the work, except plant establishment, exceed 660 will be considered non-responsive and will be rejected.

The contract shall be executed by the successful bidder and shall be returned, together with the contract bonds, to the Department so that it is received within 10 days, not including Saturdays, Sundays and legal holidays, after the bidder has received the contract for execution. Failure to do so shall be just cause for forfeiture of the proposal guaranty. The executed contract documents shall be delivered to the following address: Department of Transportation MS 43, Attn: Office Engineer, 1727 30th Street, Sacramento, CA 95816.

A "Payee Data Record" form will be included in the contract documents to be executed by the successful bidder. The purpose of the form is to facilitate the collection of taxpayer identification data. The form shall be completed and returned to the Department by the successful bidder with the executed contract and contract bonds. For the purposes of the form, payee shall be deemed to mean the successful bidder. The form is not to be completed for subcontractors or suppliers. Failure to complete and return the "Payee Data Record" form to the Department as provided herein will result in the retention of 31 percent of payments due the contractor and penalties of up to $20,000. This retention of payments for failure to complete the "Payee Data Record" form is in addition to any other retention of payments due the Contractor.

## SECTION 4. BEGINNING OF WORK, TIME OF COMPLETION AND LIQUIDATED DAMAGES

Attention is directed to the provisions in Sections 8-1.03, "Beginning of Work," 8-1.06, "Time of Completion," 8-1.07, "Liquidated Damages," and 20-4.08, "Plant Establishment Work," of the Standard Specifications and these special provisions.

The Contractor shall begin work within 15 calendar days after the contract has been approved by the Attorney General or the attorney appointed and authorized to represent the Department of Transportation.

The work, except plant establishment work, shall be diligently prosecuted to completion before the expiration of **the NUMBER OF WORKING DAYS BID** beginning on the fifteenth calendar day after approval of the contract.

The Contractor shall pay to the State of California the sum of $13,100 per day, for each and every calendar day's delay in finishing the work, except plant establishment work, after expiration of the number of working days bid, until work requiring closure of lanes or shoulders on State Highway Route 60 is complete.

The Contractor shall pay to the State of California the sum of $8,100 per day, for each and every calendar day's delay in finishing the work, except plant establishment work, after expiration of the number of working days bid, if no further lane or shoulder closures are required on State Highway Route 60 to complete the remaining work.

The Contractor shall diligently prosecute the plant establishment work to completion within the period of time specified in Section 10-2.04, "Highway Planting," of these special provisions. The Contractor shall pay to the State of California the sum of $600 per day, for each and every calendar day's delay in completing the plant establishment work in excess of the number of working days specified.

In no case will liquidated damages of more than $13,100 per day be assessed.

## SECTION 5. GENERAL

## SECTION 5-1. MISCELLANEOUS

### 5-1.01 PLANS AND WORKING DRAWINGS

When the specifications require working drawings to be submitted to the Division of Structure Design, the drawings shall be submitted to: Division of Structure Design, Documents Unit, Mail Station 9, 1801 30th Street, Sacramento, CA 95816, Telephone 916 227-8252.

## 5-1.011 EXAMINATION OF PLANS, SPECIFICATIONS, CONTRACT, AND SITE OF WORK

Attention is directed to "Differing Site Conditions" of these special provisions regarding physical conditions at the site which may differ from those indicated in "Materials Information," log of test borings or other geotechnical information obtained by the Department's investigation of site conditions.

## 5-1.012 DIFFERING SITE CONDITIONS

Attention is directed to Section 5-1.116, "Differing Site Conditions," of the Standard Specifications.

During the progress of the work, if subsurface or latent conditions are encountered at the site differing materially from those indicated in the "Materials Information," log of test borings, other geotechnical data obtained by the Department's investigation of subsurface conditions, or an examination of the conditions above ground at the site, the party discovering those conditions shall promptly notify the other party in writing of the specific differing conditions before they are disturbed and before the affected work is performed.

The Contractor will be allowed 15 days from the notification of the Engineer's determination of whether or not an adjustment of the contract is warranted, in which to file a notice of potential claim in conformance with the provisions of Section 9-1.04, "Notice of Potential Claim," of the Standard Specifications and as specified herein; otherwise the decision of the Engineer shall be deemed to have been accepted by the Contractor as correct. The notice of potential claim shall set forth in what respects the Contractor's position differs from the Engineer's determination and provide any additional information obtained by the Contractor, including but not limited to additional geotechnical data. The notice of potential claim shall be accompanied by the Contractor's certification that the following were made in preparation of the bid: a review of the contract, a review of the "Materials Information," a review of the log of test borings and other records of geotechnical data to the extent they were made available to bidders prior to the opening of bids, and an examination of the conditions above ground at the site. Supplementary information, obtained by the Contractor subsequent to the filing of the notice of potential claim, shall be submitted to the Engineer in an expeditious manner.

## 5-1.013 LINES AND GRADES

Attention is directed to Section 5-1.07, "Lines and Grades," of the Standard Specifications.

Stakes or marks will be set by the Engineer in conformance with the requirements in Chapter 12, "Construction Surveys," of the Department's Surveys Manual.

## 5-1.015 LABORATORY

When a reference is made in the specifications to the "Laboratory," the reference shall mean Division of Engineering Services - Materials Engineering and Testing Services and Division of Engineering Services - Geotechnical Services of the Department of Transportation, or established laboratories of the various Districts of the Department, or other laboratories authorized by the Department to test materials and work involved in the contract. When a reference is made in the specifications to the "Transportation Laboratory," the reference shall mean Division of Engineering Services - Materials Engineering and Testing Services and Division of Engineering Services - Geotechnical Services, located at 5900 Folsom Boulevard, Sacramento, CA 95819, Telephone (916) 227-7000.

## 5-1.017 CONTRACT BONDS

Attention is directed to Section 3-1.02, "Contract Bonds," of the Standard Specifications and these special provisions.

The payment bond shall be in a sum not less than one hundred percent of the total amount payable by the terms of the contract.

## 5-1.018 GUARANTEE

### GENERAL

The Contractor shall guarantee the work is in accordance with contract requirements and remains free from substantial defects in materials and workmanship for a period of one year after contract acceptance. For certain portions of the work where the Director relieves the Contractor of responsibility in accordance with Section 7-1.15, "Relief from Maintenance and Responsibility," of the Standard Specifications, the guarantee period starts on the relief date and ends one year therefrom.

Substantial defects in materials and workmanship means defective work objectively manifested by damaged, displaced, or missing parts or components: and workmanship resulting in improper function of materials, components, equipment, or systems, as installed or manufactured by the Contractor, subcontractor, supplier, or manufacturer.

During the guarantee period, the Contractor shall repair or replace contract work and associated work which is not in accordance with contract requirements or has substantial defects in materials and workmanship. The Contractor shall perform the corrective work with no expense to the Department other than State-provided field inspection services.

The guarantee of work excludes damage or displacement that is outside the control of the Contractor and caused by normal wear and tear, improper operation, insufficient maintenance, abuse, unauthorized modification, or natural disaster as described in Section 7-1.165, "Damage by Storm, Flood, Tsunami or Earthquake," of the Standard Specifications.

The Contractor shall have the same insurance coverage during corrective work operations as prior to contract acceptance, in accordance with Section 7-1.12, "Indemnification and Insurance," of the Standard Specifications.

The contract bonds furnished in accordance with Section 3-1.02, "Contract Bonds," of the Standard Specifications must remain in full force and effect during the guarantee period and until all corrective work is complete.

In the case of conflict between this guarantee provision and any warranty provision included in the contract, the warranty provision shall govern for the specific construction product or feature covered.

**CORRECTIVE WORK**

During the guarantee period, the Department will monitor performance of the highway facilities completed by the Contractor and will perform a thorough review of the contract work at least 60 days before the expiration of the one-year guarantee.

If the Engineer discovers contract work not in compliance with contract requirements or that has substantial defects in materials and workmanship, at any time during the guarantee period, a list of items that require corrective work will be developed and forwarded to the Contractor. Within 15 days of receipt of a list, the Contractor shall submit to the Engineer a detailed plan for performing corrective work. The work plan shall include a start to finish schedule. It shall include a list of labor, equipment, materials, and any special services intended to be used. It shall clearly show related work including traffic control, temporary delineation, and permanent delineation.

The Contractor shall start the corrective and related work within 15 days of receiving notice from the Engineer that the Contractor's work plan is approved. The corrective work shall be diligently prosecuted and completed within the time allotted in the approved work plan.

If the Engineer determines that corrective work, covered by the guarantee, is urgently needed to prevent injury or property damage, the Engineer will give the Contractor a request to start emergency repair work and a list of items that require repair work. The Contractor shall mobilize within 24 hours and diligently perform emergency repair work on the damaged highway facilities. The Contractor shall submit a work plan within 5 days of starting emergency repair work.

If the Contractor fails to commence and execute, with due diligence, corrective work and related work required under the guarantee in the time allotted, the Engineer may proceed to have the work performed by State forces or other forces at the Contractor's expense. Upon demand, the Contractor shall pay all costs incurred by the Department for work performed by State forces or other forces including labor, equipment, material, and special services.

**PAYMENT**

Full compensation for performing corrective work; and related work such as traffic control, temporary delineation, and permanent delineation, and to maintain insurance coverage and bonds, shall be considered as included in the contract prices paid for the various contract items of work and no separate payment will be made therefore.

## 5-1.019 COST REDUCTION INCENTIVE

Attention is directed to Section 5-1.14, "Cost Reduction Incentive," of the Standard Specifications.

Prior to preparing a written cost reduction proposal, the Contractor shall request a meeting with the Engineer to discuss the proposal in concept. Items of discussion will also include permit issues, impact on other projects, impact on the project schedule, peer reviews, overall merit of the proposal, and review times required by the Department and other agencies.

If a cost reduction proposal submitted by the Contractor, and subsequently approved by the Engineer, provides for a reduction in contract time, 50 percent of that contract time reduction shall be credited to the State by reducing the contract working days, not including plant establishment. Attention is directed to "Beginning of Work, Time of Completion and Liquidated Damages" of these special provisions regarding the working days.

If a cost reduction proposal submitted by the Contractor, and subsequently approved by the Engineer, provides for a reduction in traffic congestion or avoids traffic congestion during construction, 60 percent of the estimated net savings in construction costs attributable to the cost reduction proposal will be paid to the Contractor. In addition to the requirements in Section 5-1.14, "Cost Reduction Incentive," of the Standard Specifications, the Contractor shall provide detailed comparisons of the traffic handling between the existing contract and the proposed change, and estimates of the traffic volumes and congestion.

### 5-1.02 LABOR NONDISCRIMINATION

Attention is directed to the following Notice that is required by Chapter 5 of Division 4 of Title 2, California Code of Regulations.

**NOTICE OF REQUIREMENT FOR NONDISCRIMINATION PROGRAM**

**(GOV. CODE, SECTION 12990)**

Your attention is called to the "Nondiscrimination Clause", set forth in Section 7-1.01A(4), "Labor Nondiscrimination," of the Standard Specifications, which is applicable to all nonexempt State contracts and subcontracts, and to the "Standard California Nondiscrimination Construction Contract Specifications" set forth therein. The specifications are applicable to all nonexempt State construction contracts and subcontracts of $5000 or more.

### 5-1.022 EXCLUSION OF RETENTION

In conformance with 49 CFR, Part 26, Subpart B, Section 26.29 (b)(1), the retention of proceeds required by Public Contract Code Section 10261 shall not apply. In conformance with Public Contract Code 7200 (b), in subcontracts between the Contractor and a subcontractor and in subcontracts between a subcontractor and any subcontractor thereunder, retention proceeds shall not be withheld, and the exceptions provided in Public Contract Code 7200 (c) shall not apply. At the option of the Contractor, subcontractors may be required to furnish payment and performance bonds issued by an admitted surety insurer.

The third paragraph of Section 9-1.06, "Partial Payments," of the Standard Specifications, and Section 9-1.065, "Payment of Withheld Funds," of the Standard Specifications shall not apply.

### 5-1.023 UNSATISFACTORY PROGRESS

If the number of working days charged to the contract exceeds 75 percent of the working days in the current time of completion and the percent working days elapsed exceeds the percent work completed by more than 15 percentage points, the Department will withhold 10 percent of the amount due on the current monthly estimate.

The percent working days elapsed will be determined from the number of working days charged to the contract divided by the number of contract working days in the current time of completion, expressed as a percentage. The number of contract working days in the current time of completion shall consist of the original contract working days increased or decreased by time adjustment s approved by the Engineer.

The percent work completed will be determined by the Engineer from the sum of payments made to date plus the amount due on the current monthly estimate, divided by the current total estimated value of the work, expressed as a percentage.

When the percent of working days elapsed minus the percent of work completed is less than or equal to 15 percentage points, the funds withheld shall be returned to the Contractor with the next monthly progress payment.

Funds kept or withheld from payment, due to the failure of the Contractor to comply with the provisions of the contract, will not be subject to the requirements of Public Contract Code 7107 or to the payment of interest pursuant to Public Contract Code Section 10261.5.

### 5-1.03 INTEREST ON PAYMENTS

Interest shall be payable on progress payments, payments after acceptance, final payments, extra work payments, and claim payments as follows:

A. Unpaid progress payments, payment after acceptance, and final payments shall begin to accrue interest 30 days after the Engineer prepares the payment estimate.
B. Unpaid extra work bills shall begin to accrue interest 30 days after preparation of the first pay estimate following receipt of a properly submitted and undisputed extra work bill. To be properly submitted, the bill must be submitted within 7 days of the performance of the extra work and in conformance with the provisions in Section 9-1.03C, "Records," and Section 9-1.06, "Partial Payments," of the Standard Specifications. An undisputed extra work bill not submitted within 7 days of performance of the extra work will begin to accrue interest 30 days after the preparation of the second pay estimate following submittal of the bill.
C. The rate of interest payable for unpaid progress payments, payments after acceptance, final payments, and extra work payments shall be 10 percent per annum.
D. The rate of interest payable on a claim, protest or dispute ultimately allowed under this contract shall be 6 percent per annum. Interest shall begin to accrue 61 days after the Contractor submits to the Engineer information in sufficient detail to enable the Engineer to ascertain the basis and amount of said claim, protest or dispute.

The rate of interest payable on any award in arbitration shall be 6 percent per annum if allowed under the provisions of Civil Code Section 3289.

**5-1.04 PUBLIC SAFETY**

The Contractor shall provide for the safety of traffic and the public in conformance with the provisions in Section 7-1.09, "Public Safety," of the Standard Specifications and these special provisions.

The Contractor shall install temporary railing (Type K) between a lane open to public traffic and an excavation, obstacle or storage area when the following conditions exist:

A. Excavations.—The near edge of the excavation is 3.6 m or less from the edge of the lane, except:

1. Excavations covered with sheet steel or concrete covers of adequate thickness to prevent accidental entry by traffic or the public.
2. Excavations less than 0.3-m deep.
3. Trenches less than 0.3-m wide for irrigation pipe or electrical conduit, or excavations less than 0.3-m in diameter.
4. Excavations parallel to the lane for the purpose of pavement widening or reconstruction.
5. Excavations in side slopes, where the slope is steeper than 1:4 (vertical:horizontal).
6. Excavations protected by existing barrier or railing.

B. Temporarily Unprotected Permanent Obstacles.—The work includes the installation of a fixed obstacle together with a protective system, such as a sign structure together with protective railing, and the Contractor elects to install the obstacle prior to installing the protective system; or the Contractor, for the Contractor's convenience and with permission of the Engineer, removes a portion of an existing protective railing at an obstacle and does not replace such railing complete in place during the same day.

C. Storage Areas.—Material or equipment is stored within 3.6 m of the lane and the storage is not otherwise prohibited by the provisions of the Standard Specifications and these special provisions.

The approach end of temporary railing (Type K), installed in conformance with the provisions in this section "Public Safety" and in Section 7-1.09, "Public Safety," of the Standard Specifications, shall be offset a minimum of 4.6 m from the edge of the traffic lane open to public traffic. The temporary railing shall be installed on a skew toward the edge of the traffic lane of not more than 0.3-m transversely to 3 m longitudinally with respect to the edge of the traffic lane. If the 4.6-m minimum offset cannot be achieved, the temporary railing shall be installed on the 10 to 1 skew to obtain the maximum available offset between the approach end of the railing and the edge of the traffic lane, and an array of temporary crash cushion modules shall be installed at the approach end of the temporary railing.

Temporary railing (Type K) shall conform to the provisions in Section 12-3.08, "Temporary Railing (Type K)," of the Standard Specifications. Temporary railing (Type K), conforming to the details shown on 1999 Standard Plan T3, may be used. Temporary railing (Type K) fabricated prior to January 1, 1993, and conforming to 1988 Standard Plan B11-30 may be used, provided the fabrication date is printed on the required Certificate of Compliance.

Temporary crash cushion modules shall conform to the provisions in "Temporary Crash Cushion Module" of these special provisions.

Except for installing, maintaining and removing traffic control devices, whenever work is performed or equipment is operated in the following work areas, the Contractor shall close the adjacent traffic lane unless otherwise provided in the Standard Specifications and these special provisions:

| Approach Speed of Public Traffic (Posted Limit) (Kilometers Per Hour) | Work Areas |
|---|---|
| Over 72 (45 Miles Per Hour) | Within 1.8 m of a traffic lane but not on a traffic lane |
| 56 to 72 (35 to 45 Miles Per Hour) | Within 0.9-m of a traffic lane but not on a traffic lane |

The lane closure provisions of this section shall not apply if the work area is protected by permanent or temporary railing or barrier.

When traffic cones or delineators are used to delineate a temporary edge of a traffic lane, the line of cones or delineators shall be considered to be the edge of the traffic lane, however, the Contractor shall not reduce the width of an existing lane to less than 3 m without written approval from the Engineer.

When work is not in progress on a trench or other excavation that required closure of an adjacent lane, the traffic cones or portable delineators used for the lane closure shall be placed off of and adjacent to the edge of the traveled way. The spacing of the cones or delineators shall be not more than the spacing used for the lane closure.

Suspended loads or equipment shall not be moved nor positioned over public traffic or pedestrians.

Full compensation for conforming to the provisions in this section "Public Safety," including furnishing and installing temporary railing (Type K) and temporary crash cushion modules, shall be considered as included in the contract prices paid for the various items of work involved and no additional compensation will be allowed therefor.

**5-1.05 TESTING**

Testing of materials and work shall conform to the provisions in Section 6-3, "Testing," of the Standard Specifications and these special provisions.

Whenever the provisions of Section 6-3.01, "General," of the Standard Specifications refer to tests or testing, it shall mean tests to assure the quality and to determine the acceptability of the materials and work.

The Engineer will deduct the costs for testing of materials and work found to be unacceptable, as determined by the tests performed by the Department, and the costs for testing of material sources identified by the Contractor which are not used for the work, from moneys due or to become due to the Contractor. The amount deducted will be determined by the Engineer.

**5-1.06 REMOVAL OF ASBESTOS AND HAZARDOUS SUBSTANCES**

When the presence of asbestos or hazardous substances are not shown on the plans or indicated in the specifications and the Contractor encounters materials which the Contractor reasonably believes to be asbestos or a hazardous substance as defined in Section 25914.1 of the Health and Safety Code, and the asbestos or hazardous substance has not been rendered harmless, the Contractor may continue work in unaffected areas reasonably believed to be safe. The Contractor shall immediately cease work in the affected area and report the condition to the Engineer in writing.

In conformance with Section 25914.1 of the Health and Safety Code, removal of asbestos or hazardous substances including exploratory work to identify and determine the extent of the asbestos or hazardous substance will be performed by separate contract.

If delay of work in the area delays the current controlling operation, the delay will be considered a right of way delay and the Contractor will be compensated for the delay in conformance with the provisions in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

**5-1.065 SOLID WASTE DISPOSAL AND RECYCLING REPORT**

This work shall consist of reporting disposal and recycling of construction solid waste, as specified in these special provisions. For the purposes of this section, solid waste includes construction and demolition waste debris, but not hazardous waste.

Annually by the fifteenth day of January, the Contractor shall complete and certify Form CEM-2025, "Solid Waste Disposal and Recycling Report," which quantifies solid waste generated by the work performed and disposed of in landfills or recycled during the previous calendar year. The amount and type of solid waste disposed of or recycled shall be reported in either metric tonnes or cubic meters. The Contractor shall also complete and certify Form CEM-2025 within 5 days following contract acceptance.

Form CEM-2025, "Solid Waste Disposal and Recycling Report" can be downloaded from the following website:

http://www.dot.ca.gov/hq/construc/manual2001

If the Contractor has not submitted Form CEM-2025, by the dates specified above, the Department will withhold the amount of $10,000 for each missing or incomplete report. The moneys withheld will be released for payment on the next monthly estimate for partial payment following the date that a complete and acceptable Form CEM-2025 is submitted to the Engineer. Upon completion of all contract work and submittal of the final Form CEM-2025, remaining withheld funds associated with this section, "Solid Waste Disposal and Recycling Report," will be released for payment. Withheld funds in conformance with this section shall be in addition to other moneys withheld provided for in the contract. No interest will be due the Contractor on withheld amounts.

Full compensation for preparing and submitting Form CEM-2025, "Solid Waste Disposal and Recycling Report," shall be considered as included in the contract price for the various items of work involved and no additional compensation will be allowed therefor.

**5-1.07 (BLANK)**

**5-1.075 BUY AMERICA REQUIREMENTS**

Attention is directed to the "Buy America" requirements of the Surface Transportation Assistance Act of 1982 (Section 165) and the Intermodal Surface Transportation Efficiency Act of 1991 (ISTEA) Sections 1041(a) and 1048(a), and the regulations adopted pursuant thereto. In conformance with the law and regulations, all manufacturing processes for steel and iron materials furnished for incorporation into the work on this project shall occur in the United States; with the exception that pig iron and processed, pelletized and reduced iron ore manufactured outside of the United States may be used in the domestic manufacturing process for such steel and iron materials. The application of coatings, such as epoxy coating, galvanizing, painting, and other coatings that protect or enhance the value of steel or iron materials shall be considered a manufacturing process subject to the "Buy America" requirements.

A Certificate of Compliance conforming to the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications shall be furnished for steel and iron materials. The certificates, in addition to certifying that the materials comply with the specifications, shall specifically certify that all manufacturing processes for the materials occurred in the United States, except for the above exceptions.

The requirements imposed by the law and regulations do not prevent a minimal use of foreign steel and iron materials if the total combined cost of the materials used does not exceed one-tenth of one percent (0.1 percent) of the total contract cost or $2500, whichever is greater. The Contractor shall furnish the Engineer acceptable documentation of the quantity and value of the foreign steel and iron prior to incorporating the materials into the work.

**5-1.08 SUBCONTRACTOR AND DBE RECORDS**

The Contractor shall maintain records showing the name and business address of each first-tier subcontractor. The records shall also show the name and business address of every DBE subcontractor, DBE vendor of materials and DBE trucking company, regardless of tier. The records shall show the date of payment and the total dollar figure paid to all of these firms. DBE prime contractors shall also show the date of work performed by their own forces along with the corresponding dollar value of the work.

Upon completion of the contract, a summary of these records shall be prepared on Form CEM-2402 (F) and certified correct by the Contractor or the Contractor's authorized representative, and shall be furnished to the Engineer. The form shall be furnished to the Engineer within 90 days from the date of contract acceptance. $10,000 will be withheld from payment until the Form CEM-2402 (F) is submitted. The amount will be returned to the Contractor when a satisfactory Form CEM-2402 (F) is submitted.

Prior to the fifteenth of each month, the Contractor shall submit documentation to the Engineer showing the amount paid to DBE trucking companies listed in the Contractor's DBE information. This monthly documentation shall indicate the portion of the revenue paid to DBE trucking companies which is claimed toward DBE participation. The Contractor shall also obtain and submit documentation to the Engineer showing the amount paid by DBE trucking companies to all firms, including owner-operators, for the leasing of trucks. The DBE who leases trucks from a non-DBE is entitled to credit only for the fee or commission it receives as a result of the lease arrangement. The records must confirm that the amount of credit claimed toward DBE participation conforms with Section 2-1.02, "Disadvantaged Business Enterprise," of these special provisions.

The Contractor shall also obtain and submit documentation to the Engineer showing the truck number, owner's name, California Highway Patrol CA number, and if applicable, the DBE certification number of the owner of the truck for all trucks used during that month for which DBE participation will be claimed. This documentation shall be submitted on Form CEM-2404 (F).

**5-1.083 DBE CERTIFICATION STATUS**

If a DBE subcontractor is decertified during the life of the project, the decertified subcontractor shall notify the Contractor in writing with the date of decertification. If a subcontractor becomes a certified DBE during the life of the project, the subcontractor shall notify the Contractor in writing with the date of certification. The Contractor shall furnish the written documentation to the Engineer.

Upon completion of the contract, Form CEM-2403 (F) indicating the DBE's existing certification status shall be signed and certified correct by the Contractor. The certified form shall be furnished to the Engineer within 90 days from the date of contract acceptance.

**5-1.086 PERFORMANCE OF DBE SUBCONTRACTORS AND SUPPLIERS**

The DBEs listed by the Contractor in response to the provisions in Section 2-1.02B, "Submission of DBE Information," and Section 3, "Award and Execution of Contract," of these special provisions, which are determined by the Department to be certified DBEs, shall perform the work and supply the materials for which they are listed, unless the Contractor has received prior written authorization to perform the work with other forces or to obtain the materials from other sources.

Authorization to use other forces or sources of materials may be requested for the following reasons:

A. The listed DBE, after having had a reasonable opportunity to do so, fails or refuses to execute a written contract, when such written contract, based upon the general terms, conditions, plans and specifications for the project, or on the terms of such subcontractor's or supplier's written bid, is presented by the Contractor.
B. The listed DBE becomes bankrupt or insolvent.
C. The listed DBE fails or refuses to perform the subcontract or furnish the listed materials.
D. The Contractor stipulated that a bond was a condition of executing a subcontract and the listed DBE subcontractor fails or refuses to meet the bond requirements of the Contractor.
E. The work performed by the listed subcontractor is substantially unsatisfactory and is not in substantial conformance with the plans and specifications, or the subcontractor is substantially delaying or disrupting the progress of the work.
F. It would be in the best interest of the State.

The Contractor shall not be entitled to any payment for such work or material unless it is performed or supplied by the listed DBE or by other forces (including those of the Contractor) pursuant to prior written authorization of the Engineer.

**5-1.09 SUBCONTRACTING**

Attention is directed to the provisions in Section 8-1.01, "Subcontracting," of the Standard Specifications, and Section 2, "Proposal Requirements and Conditions," and Section 3, "Award and Execution of Contract," of these special provisions.

Pursuant to the provisions of Section 1777.1 of the Labor Code, the Labor Commissioner publishes and distributes a list of contractors ineligible to perform work as a subcontractor on a public works project. This list of debarred contractors is available from the Department of Industrial Relations web site at:

http://www.dir.ca.gov/DLSE/Debar.html.

The provisions in the third paragraph of Section 8-1.01, "Subcontracting," of the Standard Specifications, that the Contractor shall perform with the Contractor's own organization contract work amounting to not less than 50 percent of the original contract price, is not changed by the Federal Aid requirement specified under "Required Contract Provisions Federal-Aid Construction Contracts" in Section 14 of these special provisions that the Contractor perform not less than 30 percent of the original contract work with the Contractor's own organization.

Each subcontract and any lower tier subcontract that may in turn be made shall include the "Required Contract Provisions Federal-Aid Construction Contracts" in Section 14 of these special provisions. This requirement shall be enforced as follows:

A. Noncompliance shall be corrected. Payment for subcontracted work involved will be withheld from progress payments due, or to become due, until correction is made. Failure to comply may result in termination of the contract.

In conformance with the Federal DBE regulations Sections 26.53(f)(1) and 26.53(f)(2) Part 26, Title 49 CFR:

A. The Contractor shall not terminate for convenience a DBE subcontractor listed in response to Section 2-1.02B, "Submission of DBE Information," and then perform that work with its own forces, or those of an affiliate without the written consent of the Department, and
B. If a DBE subcontractor is terminated or fails to complete its work for any reason, the Contractor will be required to make good faith efforts to substitute another DBE subcontractor for the original DBE subcontractor, to the extent needed to meet the contract goal.

The requirement in Section 2-1.02, "Disadvantaged Business Enterprise (DBE)," of these special provisions that DBEs must be certified on the date bids are opened does not apply to DBE substitutions after award of the contract.

### 5-1.10 PROMPT PROGRESS PAYMENT TO SUBCONTRACTORS

Attention is directed to the provisions in Sections 10262 and 10262.5 of the Public Contract Code concerning prompt payment to subcontractors.

### 5-1.103 RECORDS

The Contractor shall maintain cost accounting records for the contract pertaining to, and in such a manner as to provide a clear distinction between, the following six categories of costs of work during the life of the contract:

A. Direct costs of contract item work.
B. Direct costs of changes in character in conformance with Section 4-1.03C, "Changes in Character of Work," of the Standard Specifications.
C. Direct costs of extra work in conformance with Section 4-1.03D, "Extra Work," of the Standard Specifications.
D. Direct costs of work not required by the contract and performed for others.
E. Direct costs of work performed under a notice of potential claim in conformance with the provisions in Section 9-1.04, "Notice of Potential Claim," of the Standard Specifications.
F. Indirect costs of overhead.

Cost accounting records shall include the information specified for daily extra work reports in Section 9-1.03C, "Records," of the Standard Specifications. The requirements for furnishing the Engineer completed daily extra work reports shall only apply to work paid for on a force account basis.

The cost accounting records for the contract shall be maintained separately from other contracts, during the life of the contract, and for a period of not less than 3 years after the date of acceptance of the contract. If the Contractor intends to file claims against the Department, the Contractor shall keep the cost accounting records specified above until complete resolution of all claims has been reached.

### 5-1.104 INTERNET DAILY EXTRA WORK REPORT

When extra work is being paid for on a force account basis, the Contractor shall submit daily extra work reports in conformance with the provisions in Section 9-1.03C, "Records," of the Standard Specifications and these special provisions.

The Contractor shall send daily extra work reports to the Engineer using the Department's Internet extra work billing system. The reports shall conform to the requirements in the "iCAS User's Guide" (Guide). The Guide is available from the Department, and is also found on the Internet at:

http://www.dot.ca.gov/hq/construc/ewb/EWB_INSTRUCTION.pdf

The Department will provide system accounts to the Contractor's authorized representatives when at least one of the representatives has received training. The Department will provide system training to at least one of the Contractor's authorized representatives within 30 days of the Contractor's request for training. The Department will assign an account and user identification to the Contractor's authorized representatives, and each Contractor's authorized representative shall maintain a unique password. A daily extra work report that the Contractor's authorized representative sends to the Department using the Internet extra work billing system will be considered signed by the Contractor. A daily extra work report that the Engineer approves using the Internet extra work billing system will be considered signed by the Engineer.

Daily extra work reports that include billing for materials shall be substantiated by a valid copy of a vendor's invoice in conformance to the requirements in Section 9-1.03C, "Records," of the Standard Specifications. Each materials invoice shall clearly identify the relative daily extra work report and the associated cost of the materials. In addition to postal service and parcel service and if approved by the Engineer, invoices may be sent by facsimile or as an electronic-mail attachment.

The Contractor shall maintain the Contractor's interface with the Department's Internet extra work billing system. If the Contractor is using the file transfer process to submit extra work reports, it shall conform to the file transfer format and process defined in the Guide.

### 5-1.11 PARTNERING

The State will promote the formation of a "Partnering" relationship with the Contractor in order to effectively complete the contract to the benefit of both parties. The purpose of this relationship is to maintain a cooperative communication and to mutually resolve conflicts at the lowest responsible management level.

The Contractor may request the formation of a "Partnering" relationship by submitting a request in writing to the Engineer after approval of the contract. If the Contractor's request for "Partnering" is approved by the Engineer, scheduling of a "Partnering Workshop," selecting the "Partnering" facilitator and workshop site, and other administrative details shall be as agreed to by both parties. If agreed to by the parties, additional "Partnering Workshops" will be conducted as needed throughout the life of the contract.

A one-day "Training in Partnering Concepts" session will be conducted regardless of whether the Contractor requests the formation of a "Partnering" relationship. The "Training in Partnering Concepts" session will be conducted locally for the Contractor's and the Engineer's project representatives. The Contractor shall be represented by a minimum of 2 representatives, one being the Contractor's authorized representative pursuant to Section 5-1.06, "Superintendence," of the Standard Specifications. Scheduling of the "Training in Partnering Concepts" session and selection of the trainer and training site shall be determined cooperatively by the Contractor and the Engineer. If, upon the Contractor's request, "Partnering" is approved by the Engineer, the "Training in Partnering Concepts" session shall be conducted prior to the initial "Partnering Workshop."

The costs involved in providing the "Training in Partnering Concepts" trainer and training site will be borne entirely by the State. The costs will be determined in conformance with the provisions in Section 9-1.03B, "Work Performed by Special Forces or Other Special Services," of the Standard Specifications, and paying to the Contractor the sum of that cost, except no markups will be allowed.

The costs involved in providing the "Partnering Workshop" facilitator and workshop site will be borne equally by the State and the Contractor. The division of cost will be made by determining the cost in providing the "Partnering Workshop" facilitator and workshop site in conformance with the provisions in Section 9-1.03B, "Work Performed by Special Forces or Other Special Services," of the Standard Specifications, and paying to the Contractor one-half of that cost, except no markups will be allowed.

All other costs associated with "Training in Partnering Concepts" and "Partnering Workshops" will be borne separately by the party incurring the costs, such as wages and travel expenses, and no additional compensation will be allowed therefor.

The establishment of a "Partnering" relationship will not change or modify the terms and conditions of the contract and will not relieve either party of the legal requirements of the contract.

**5-1.114 VALUE ANALYSIS**

The Contractor may submit to the Engineer, in writing, a request for a "Value Analysis" workshop. The purpose for having a workshop is to identify value enhancing opportunities and to consider modifications to the plans and specifications that will reduce either the total cost, time of construction or traffic congestion, without impairing, in any manner, the essential functions or characteristics of the project including, but not limited to, service life, economy of operation, ease of maintenance, benefits to the travelling public, desired appearance, or design and safety standards.

To maximize the potential benefits of a workshop, the request should be submitted to the Engineer early in the project after approval of the contract. If the Contractor's request for a "Value Analysis" workshop is approved by the Engineer, scheduling of a workshop, selecting the facilitator and workshop site, and other administrative details shall be determined cooperatively by the Contractor and the Engineer.

The workshop shall be conducted in conformance with the methodology described in the Department's "Value Analysis Team Guide" available at the Department's web site at:

http://www.dot.ca.gov/hq/oppd/value/

The facilitator shall be a Certified Value Specialist (CVS) as recognized by the Society of American Value Engineers (SAVE) International, which may be contacted as follows:

SAVE International, 60 Revere Drive, Northbrook, IL 60062
Telephone 1-847-480-1730, FAX 1-847-480-9282

The Contractor may submit recommendations resulting from a "Value Analysis" workshop for approval by the Engineer as cost reduction incentive proposals in conformance with the provisions in Section 5-1.14, "Cost Reduction Incentive," of the Standard Specifications.

The costs involved in providing the "Value Analysis" facilitator and workshop site will be borne equally by the State and the Contractor. The division of cost will be made by determining the cost in providing the "Value Analysis" facilitator and workshop site in conformance with the provisions in Section 9-1.03B, "Work Performed by Special Forces or Other Special Services," of the Standard Specifications, and paying to the Contractor one-half of that cost, except no markups will be allowed.

All other costs associated with the "Value Analysis" workshop will be borne separately by the party incurring the costs, such as wages and travel expenses, and no additional compensation will be allowed therefor.

## 5-1.12 DISPUTE REVIEW BOARD

### GENERAL

To assist in the resolution of disputes or potential claims arising out of the work of this project, a Dispute Review Board, hereinafter referred to as the "DRB," shall be established by the Engineer and Contractor cooperatively upon approval of the contract. The DRB is intended to assist the contract administrative claims resolution process as specified in the provisions in Section 9-1.04, "Notice of Potential Claim," and Section 9-1.07B, "Final Payment and Claims," of the Standard Specifications and these special provisions. The DRB shall not serve as a substitute for provisions in the specifications in regard to filing potential claims. The requirements and procedures established in this section shall be a prerequisite to filing a claim, filing for arbitration, or filing for litigation prior or subsequent to project completion.

The DRB shall be utilized when dispute or potential claim resolution at the project level is unsuccessful. The DRB shall function as specified herein until the day of acceptance of the contract, at which time the work of the DRB will cease except for completion of unfinished reports. No DRB dispute meetings shall take place later than 30 days prior to acceptance of contract. After acceptance of contract, disputes or potential claims which have followed the dispute resolution processes of the Standard Specifications and these special provisions, but have not been resolved, shall be stated or restated by the Contractor, in response to the Proposed Final Estimate within the time limits provided in Section 9-1.07B, "Final Payment and Claims," of the Standard Specifications. The State will review those claims in conformance with the provisions in Section 9-1.07B of the Standard Specifications. Following the adherence to and completion of the contractual administrative claims procedure, the Contractor may file for arbitration in conformance with the provisions in Section 9-1.10, "Arbitration," of the Standard Specifications and these special provisions.

Disputes, as used in this section, shall include differences of opinion, properly noticed as provided hereinafter, between the State and Contractor on matters related to the work and other subjects considered by the State or Contractor, or by both, to be of concern to the DRB on this project, except matters relating to Contractor, subcontractor or supplier potential claims not actionable against the Department as specified in these special provisions or quantification of disputes for overhead type expenses or costs. Disputes for overhead type expenses or costs shall conform to the requirements of Section 9-1.07B, "Final Payment and Claims," of the Standard Specifications. Whenever the term "dispute" or "disputes" is used herein, it shall be deemed to include potential claims as well as disputes.

The DRB shall serve as an advisory body to assist in the resolution of disputes between the State and the Contractor, hereinafter referred to as the "parties." The DRB shall consider disputes referred to it, and furnish written reports containing findings and recommendations pertaining to those disputes, to the parties to aid in resolution of the differences between them. DRB findings and recommendations are not binding on the parties.

### SELECTION PROCESS, DISCLOSURE AND APPOINTMENTS

The DRB shall consist of one member selected by the State and approved by the Contractor, one member selected by the Contractor and approved by the State, and a third member selected by the first 2 members and approved by both the State and the Contractor. The third member shall act as the DRB Chairperson.

DRB members shall be especially knowledgeable in the type of construction and contract documents potentially anticipated by the contract. DRB members shall discharge their responsibilities impartially as an independent body, considering the facts and circumstances related to the matters under consideration, pertinent provisions of the contract and applicable laws and regulations.

The State and the Contractor shall nominate and approve DRB members in conformance with the terms and conditions of the Dispute Review Board Agreement and these special provisions, within 45 days of the approval of the contract. Each party shall provide written notification to the other of the name of their selected DRB nominee along with the prospective member's complete written disclosure statement.

Disclosure statements shall include a resume of the prospective member's experience and a declaration statement describing past, present, anticipated, and planned relationships, including indirect relationships through the prospective member's primary or full-time employer, to this project and with the parties involved in this construction contract, including but not limited to, relevant subcontractors or suppliers to the parties, parties' principals, or parties' counsel. DRB members shall also include a full disclosure of close professional or personal relationships with all key members of the contract. Objections to nominees must be based on a specific breech or violation of nominee responsibilities or on nominee qualifications under these provisions unless otherwise specified. The Contractor or the State may, on a one-time basis, object to the other's nominee without specifying a reason and this person will not be selected for the DRB. Another person shall then be nominated within 15 days.

The first duty of the State and Contractor selected members of the DRB shall be to select and recommend a prospective third DRB member to the parties for final selection and approval. The first 2 DRB members shall proceed with the selection of the third DRB member immediately upon receiving written notification from the State of their selection, and shall provide their recommendation simultaneously to the parties within 15 days of the notification.

The first 2 DRB members shall select a third DRB member subject to mutual approval of the parties or may mutually concur on a list of potentially acceptable third DRB members and submit the list to the parties for final selection and approval of the third member. The goal in the selection of the third member is to complement the professional experience of the first 2 members and to provide leadership for the DRB's activities.

The third prospective DRB member shall supply a full disclosure statement to the first 2 DRB members and to the parties prior to appointment.

An impasse shall be considered to have been reached if the parties are unable to approve a third member within 15 days of receipt of the recommendation of the first 2 DRB members, or if the first 2 DRB members are unable to agree upon a recommendation within their 15 day time limit. In the event of an impasse in selection of third DRB member the State and the Contractor shall each propose 3 candidates for the third DRB member position. The parties shall select the candidates proposed under this paragraph from the current list of arbitrators certified by the Public Works Contract Arbitration Committee created by Article 7.2 (commencing with Section 10245) of the State Contract Act. The first 2 DRB members shall then select one of the 6 proposed candidates in a blind draw.

No DRB member shall have prior direct involvement in this contract. No member shall have a financial interest in this contract or the parties thereto, within a period of 6 months prior to award of this contract or during the contract, except as follows:

A. Compensation for services on this DRB.
B. Ownership interest in a party or parties, documented by the prospective DRB member, that has been reviewed and determined in writing by the State to be sufficiently insignificant to render the prospective member acceptable to the State.
C. Service as a member of other Dispute Review Boards on other contracts.
D. Retirement payments or pensions received from a party that are not tied to, dependent on or affected by the net worth of the party.
E. The above provisions apply to parties having a financial interest in this contract, including but not limited to contractors, subcontractors, suppliers, consultants, and legal and business services.

The Contractor or the State may reject any of the three DRB members who fail to fully comply at all times with all required employment and financial disclosure conditions of DRB membership as described in the Dispute Review Board Agreement and as specified herein. A copy of the Dispute Review Board Agreement is included in this section.

The Contractor, the State, and the 3 members of the DRB shall complete and adhere to the Dispute Review Board Agreement in administration of this DRB within 15 days of the parties' concurrence in the selection of the third member. No DRB meeting shall take place until the Dispute Review Board Agreement has been signed by all parties. The State authorizes the Engineer to execute and administer the terms of the Agreement. The person(s) designated by the Contractor as authorized to execute contract change orders shall be authorized to execute and administer the terms of this agreement, or to delegate the authority in writing. The operation of the DRB shall be in conformance with the terms of the Dispute Review Board Agreement.

**COMPENSATION**

The State and the Contractor shall bear the costs and expenses of the DRB equally. Each DRB member shall be compensated at an agreed rate of $1,200 per day if time spent per meeting, including on-site time plus one hour of travel time, is greater than 4 hours. Each DRB member shall be compensated at an agreed rate of $700 per day if time spent per meeting, including on-site time plus one hour of travel time, is less than or equal to 4 hours. The agreed rates shall be considered full compensation for on-site time, travel expenses, transportation, lodging, time for travel and incidentals for each day, or portion thereof, that the DRB member is at an authorized DRB meeting. No additional compensation will be made for time spent by DRB members in review and research activities outside the official DRB meetings unless that time, (such as time spent evaluating and preparing recommendations on specific issues presented to the DRB), has been specifically agreed to in advance by the State and Contractor. Time away from the project, which has been specifically agreed to in advance by the parties, will be compensated at an agreed rate of $125 per hour. The agreed amount of $125 per hour shall include all incidentals including expenses for telephone, fax, and computer services. Members serving on more than one DRB involving the Department, regardless of the number of meetings per day, shall not be paid more than the all inclusive rate per day or rate per hour for an individual project. The State will provide, at no cost to the Contractor, administrative services such as conference facilities and secretarial services to the DRB. These special provisions and the Dispute Review Board Agreement state the provisions for compensation and expenses of the DRB. DRB members shall be compensated at the same daily and hourly rate. The Contractor shall make direct payments to each DRB member for their participation in authorized meetings and approved hourly rate charges from invoices submitted by each DRB member. The State will reimburse the Contractor for the State's share of the costs. There will be no markups applied to expenses connected with the DRB, either by the DRB members or by the Contractor when requesting payment of the State's share of DRB

expenses. Regardless of the DRB recommendation, neither party shall be entitled to reimbursement of DRB costs from the other party.

**REPLACEMENT OF DRB MEMBERS**

Service of a DRB member may be terminated at any time with not less than 15 days notice as follows:

A. The State may terminate service of the State appointed member.
B. The Contractor may terminate service of the Contractor appointed member.
C. Upon the written recommendation of the State and Contractor appointed members for the removal of the third member.
D. Upon resignation of a member.
E. The State or Contractor may terminate the service of any member who fails to fully comply with all required employment and financial disclosure conditions of DRB membership

When a member of the DRB is replaced, the replacement member shall be appointed in the same manner as the replaced member was appointed. The appointment of a replacement DRB member will begin promptly upon determination of the need for replacement and shall be completed within 15 days. Changes in either of the DRB members chosen by the two parties will not require re-selection of the third member, unless both parties agree to such re-selection in writing. The Dispute Review Board Agreement shall be amended to reflect the change of a DRB member.

**OPERATION**

The following procedure shall be used for dispute resolution:

A. If the Contractor objects to any decision, act or order of the Engineer, the Contractor shall give written notice of potential claim in conformance with the provisions in Section 9-1.04, "Notice of Potential Claim," of the Standard Specifications and these special provisions, including the provision of applicable cost documentation; or file written protests or notices in conformance with the provisions in the Standard Specifications and these special provisions.
B. The Engineer will respond, in writing, to the Contractor's written supplemental notice of potential claim within 20 days of receipt of the notice.
C. Within 15 days after receipt of the Engineer's written response, the Contractor shall, if the Contractor still objects, file a written reply with the Engineer, stating clearly and in detail the basis of the objection.
D. Following an objection to the Engineer's written response, the Contractor shall refer the dispute to the DRB if the Contractor wishes to further pursue the objection to the Engineer's decision. The Contractor shall make the referral in writing to the DRB, simultaneously copied to the State, within 21 days after receipt of the written response from the Engineer. The written dispute referral shall describe the disputed matter in individual discrete segments so that it will be clear to both parties and the DRB what discrete elements of the dispute have been resolved, and which remain unresolved, and shall include an estimate of the cost of the affected work and impacts, if any, on project completion.
E. By failing to submit the written notice of referral to the DRB, within 21 days after receipt of the Engineer's written response to the supplemental notice of potential claim, the Contractor waives future claims and arbitration on the matter in contention.
F. The Contractor and the State shall each be afforded an opportunity to be present and to be heard by the DRB, and to offer evidence. Either party furnishing written evidence or documentation to the DRB must furnish copies of such information to the other party a minimum of 15 days prior to the date the DRB is scheduled to convene the meeting for the dispute. Either party shall produce such additional evidence as the DRB may deem necessary to reach an understanding and a determination of the dispute. The party furnishing additional evidence shall furnish copies of such additional evidence to the other party at the same time the evidence is provided to the DRB. The DRB shall not consider evidence not furnished in conformance with the terms specified herein.
G. Upon receipt by the DRB of a written referral of a dispute, the DRB shall convene to review and consider the dispute. The dispute meeting shall be held no earlier than 30 days and no later than 60 days after receipt of the written referral unless otherwise agreed to by all parties. The DRB shall determine the time and location of the DRB dispute meeting, with due consideration for the needs and preferences of the parties while recognizing the paramount importance of a timely hearing of the dispute.
H. There shall be no participation of either party's attorneys at DRB dispute meetings.
I. There shall be no participation of persons who are not directly involved in the contract or who do not have direct knowledge of the dispute, including but not limited to consultants, except for expert testimony allowed at the discretion of the DRB and with approval prior to the dispute meeting by both parties.

J. The DRB shall furnish a report, containing findings and recommendations as described in the Dispute Review Board Agreement, in writing to both the State and the Contractor. The DRB may request clarifying information of either party within 10 days after the DRB dispute meeting. Requested information shall be submitted to the DRB within 10 days of the DRB request. The DRB shall complete its report, including minority opinion, if any, and submit it to the parties within 30 days of the DRB dispute meeting, except that time extensions may be granted at the request of the DRB with the written concurrence of both parties. The report shall include the facts and circumstances related to the matters under consideration, pertinent provisions of the contract, applicable laws and regulations, and actual costs and time incurred as shown on the Contractor's cost accounting records. The DRB shall make recommendations on the merit of the dispute and, if appropriate, recommend guidelines for determining compensation.

K. Within 30 days after receiving the DRB's report, both the State and the Contractor shall respond to the DRB in writing signifying that the dispute is either resolved or remains unresolved. Failure to provide the written response within the time specified, or a written rejection of the DRB's recommendation or response to a request for reconsideration presented in the report by either party, shall conclusively indicate that the party(s) failing to respond accepts the DRB recommendation. Immediately after responses have been received from both parties, the DRB shall provide copies of both responses to the parties simultaneously. Either party may request clarification of elements of the DRB's report from the DRB prior to responding to the report. The DRB shall consider any clarification request only if submitted within 10 days of receipt of the DRB's report, and if submitted simultaneously in writing to both the DRB and the other party. Each party may submit only one request for clarification for any individual DRB report. The DRB shall respond, in writing, to requests for clarification within 10 days of receipt of such requests.

L. The DRB's recommendations, stated in the DRB's reports, are not binding on either party. Either party may seek a reconsideration of a recommendation of the DRB. The DRB shall only grant a reconsideration based upon submission of new evidence and if the request is submitted within the 30-day time limit specified for response to the DRB's written report. Each party may submit only one request for reconsideration regarding an individual DRB recommendation.

M. If the State and the Contractor are able to resolve their dispute with the aid of the DRB's report, the State and Contractor shall promptly accept and implement the recommendations of the DRB. If the parties cannot agree on compensation within 60 days of the acceptance by both parties of the DRB's recommendation, either party may request the DRB to make a recommendation regarding compensation.

N. The State or the Contractor shall not call DRB members who served on the DRB for this contract as witnesses in arbitration proceedings which may arise from this contract, and all documents created by the DRB shall be inadmissible as evidence in subsequent arbitration proceedings, except the DRB's final written reports on each issue brought before it.

O. The State and Contractor shall jointly indemnify and hold harmless the DRB members from and against all claims, damages, losses, and expenses, including but not limited to attorney's fees, arising out of and resulting from the findings and recommendations of the DRB.

P. The DRB members shall have no claim against the State or the Contractor, or both, from claimed harm arising out of the parties' evaluations of the DRB's report.

**DISPUTES INVOLVING SUBCONTRACTOR POTENTIAL CLAIMS**

For purposes of this section, a "subcontractor potential claim" shall include any potential claim by a subcontractor (including also any pass through potential claims by a lower tier subcontractor or supplier) against the Contractor that is actionable by the Contractor against the Department which arises from the work, services, or materials provided or to be provided in connection with the contract. If the Contractor determines to pursue a dispute against the Department that includes a subcontractor potential claim, the dispute shall be processed and resolved in conformance with these special provisions and in conformance with the following:

A. The Contractor shall identify clearly in submissions pursuant to this section, that portion of the dispute that involves a subcontractor potential claim or potential claims.

B. The Contractor shall include, as part of its submission pursuant to Step D above, a certification (False Claims Act Certification) by the subcontractor's or supplier's officer, partner, or authorized representative with authority to bind the subcontractor and with direct knowledge of the facts underlying the subcontractor potential claim. The Contractor shall submit a certification that the subcontractor potential claim is acknowledged and forwarded by the Contractor. The form for these certifications is available from the Engineer.

C. At DRB dispute meetings involving one or more subcontractor potential claims, the Contractor shall require that each subcontractor involved in the dispute have present an authorized representative with actual knowledge of the

facts underlying the subcontractor potential claim to assist in presenting the subcontractor potential claim and to answer questions raised by the DRB members or the Department's representatives.

D. Failure by the Contractor to declare a subcontractor potential claim on behalf of its subcontractor (including lower tier subcontractors' and suppliers' pass through potential claims) at the time of submission of the Contractor's potential claims, as provided hereunder, shall constitute a release of the State by the Contractor of such subcontractor potential claim.

E. The Contractor shall include in all subcontracts under this contract that subcontractors and suppliers of any tier (a) agree to submit subcontractor potential claims to the Contractor in a proper form and in sufficient time to allow processing by the Contractor in conformance with the Dispute Review Board resolution specifications; (b) agree to be bound by the terms of the Dispute Review Board provisions to the extent applicable to subcontractor potential claims; (c) agree that, to the extent a subcontractor potential claim is involved, completion of all steps required under these Dispute Review Board special provisions shall be a condition precedent to pursuit by the subcontractor of other remedies permitted by law, including without limitation of a lawsuit against the Contractor; and (d) agree that the existence of a dispute resolution process for disputes involving subcontractor potential claims shall not be deemed to create any claim, right, or cause of action by any subcontractor or supplier against the Department.

Notwithstanding the foregoing, this Dispute Review Board special provision shall not apply to, and the DRB shall not have the authority to consider, subcontractor potential claims between the subcontractor(s) or supplier(s) and the Contractor that are not actionable by the Contractor against the Department.

**RETENTION**

Failure of the Contractor to nominate and approve DRB members in conformance with the terms and conditions of the Dispute Review Board Agreement and these special provisions shall result in the retention of 25 percent of the estimated value of all work performed during each estimate period in which the Contractor fails to comply with the requirements of this section as determined by the Engineer. DRB retentions will be released for payment on the next monthly estimate for partial payment following the date that the Contractor has nominated and approved DRB members and no interest will be due the Contractor.

**DISPUTE REVIEW BOARD AGREEMENT**

A copy of the "Dispute Review Board Agreement" to be executed by the Contractor, State and the 3 DRB members after approval of the contract follows:

Form 6202 Rev (09/01/02)

**DISPUTE REVIEW BOARD AGREEMENT**

_____
(Contract Identification)

Contract No. _____

**THIS DISPUTE REVIEW BOARD AGREEMENT, hereinafter called "AGREEMENT"**, made and entered into this _____ day of _____, _____, between the State of California, acting through the California Department of Transportation and the Director of Transportation, hereinafter called the "STATE," _____ _____ hereinafter called the "CONTRACTOR," and the Dispute Review Board, hereinafter called the "DRB" consisting of the following members:

_____ ,
(Contractor Appointee)

_____ ,
(State Appointee)

and _____
(Third Person)

WITNESSETH, that

WHEREAS, the STATE and the CONTRACTOR, hereinafter called the "parties," are now engaged in the construction on the State Highway project referenced above; and

WHEREAS, the special provisions for the above referenced contract provides for the establishment and operation of the DRB to assist in resolving disputes; and

WHEREAS, the DRB is composed of three members, one selected by the STATE, one selected by the CONTRACTOR, and the third member selected by the other two members and approved by the parties;

NOW THEREFORE, in consideration of the terms, conditions, covenants, and performance contained herein, or attached and incorporated and made a part hereof, the STATE, the CONTRACTOR, and the DRB members hereto agree as follows:

**SECTION I DESCRIPTION OF WORK**

To assist in the resolution of disputes between the parties, the contract provides for the establishment and the operation of the DRB. The intent of the DRB is to fairly and impartially consider disputes placed before it and provide written recommendations for resolution of these disputes to both parties. The members of this DRB shall perform the services necessary to participate in the DRB's actions as designated in Section II, Scope of Work.

**SECTION II SCOPE OF WORK**

The scope of work of the DRB includes, but is not limited to, the following:

**A. OBJECTIVE**

The principal objective of the DRB is to assist in the timely resolution of disputes between the parties arising from performance of this contract. It is not intended for either party to default on their normal responsibility to amicably and fairly settle their differences by indiscriminately assigning them to the DRB. It is intended that the mere existence of the DRB will encourage the parties to resolve disputes without resorting to this review procedure. But when a dispute that is serious enough to warrant the DRB's review does develop, the process for prompt and efficient action will be in place.

**B. PROCEDURES**

The DRB shall render written reports on disputes between the parties arising from the construction contract. Prior to consideration of a dispute, the DRB shall establish rules and regulations that will govern the conduct of its business and reporting procedures in conformance with the requirements of the contract and the terms of this AGREEMENT. DRB recommendations, resulting from its consideration of a dispute, shall be furnished in writing to both parties. The recommendations shall be based on facts and circumstances involved in the dispute, pertinent contract provisions, applicable laws and regulations. The recommendations shall find one responsible party in a dispute; shared or "jury" determinations shall not be rendered. The DRB shall make recommendations on the merit of the dispute, and if appropriate, recommend guidelines for determining compensation. If the parties cannot agree on compensation within 60 days of the acceptance by both parties of the DRB's recommendation, either party may request the DRB to make a recommendation regarding compensation.

The DRB shall refrain from officially giving advice or consulting services to anyone involved in the contract. The individual members shall act in a completely independent manner and while serving as members of the DRB shall have no consulting business connections with either party or its principals or attorneys or other affiliates (subcontractors, suppliers, etc.) who have a beneficial interest in the contract.

During scheduled meetings of the DRB as well as during dispute meetings, DRB members shall refrain from expressing opinions on the merits of statements on matters under dispute or potential dispute. Opinions of DRB members expressed in private sessions shall be kept strictly confidential. Individual DRB members shall not meet with, or discuss contract issues with individual parties, except as directed by the DRB Chairperson. Such discussions or meetings shall be disclosed to both parties. Other discussions regarding the project between the DRB members and the parties shall be in the presence of all three members and both parties. Individual DRB members shall not undertake independent investigations of any kind pertaining to disputes or potential disputes, except with the knowledge of both parties and as expressly directed by the DRB Chairperson.

**C. CONSTRUCTION SITE VISITS, PROGRESS MEETINGS AND FIELD INSPECTIONS**

The DRB members shall visit the project site and meet with representatives of the parties to keep abreast of construction activities and to develop familiarity with the work in progress. Scheduled progress meetings shall be held at or near the project site. The DRB shall meet at least once at the start of the project, and at least once every 4 months thereafter. The frequency, exact time, and duration of additional site visits and progress meetings shall be as recommended by the DRB and approved by the parties consistent with the construction activities or matters under consideration and dispute. Each meeting shall consist of a round table discussion and a field inspection of the work being performed on the contract, if necessary. Each meeting shall be attended by representatives of both parties. The agenda shall generally be as follows:

1. Meeting opened by the DRB Chairperson.
2. Remarks by the STATE's representative.
3. A description by the CONTRACTOR's representative of work accomplished since the last meeting; the current schedule status of the work; and a forecast for the coming period.
4. An outline by the CONTRACTOR's representative of potential problems and a description of proposed solutions.
5. An outline by the STATE's representative of the status of the work as the STATE views it.
6. A brief description by the CONTRACTOR's or STATE's representative of potential claims or disputes which have surfaced since the last meeting.
7. A summary by the STATE's representative, the CONTRACTOR's representative, or the DRB of the status of past disputes and potential claims.

The STATE's representative will prepare minutes of all progress meetings and circulate them for revision and approval by all concerned within 10 days of the meeting.

The field inspection shall cover all active segments of the work, the DRB being accompanied by both parties' representatives. The field inspection may be waived upon mutual agreement of the parties.

**D. DRB CONSIDERATION AND HANDLING OF DISPUTES**

Upon receipt by the DRB of a written referral of a dispute, the DRB shall convene to review and consider the dispute. The dispute meeting shall be held no earlier than 30 days and no later than 60 days after receipt of the written referral, unless otherwise agreed to by all parties. The DRB shall determine the time and location of DRB dispute meetings, with due consideration for the needs and preferences of the parties while recognizing the paramount importance of speedy resolution of issues. No dispute meetings shall take place later than 30 days prior to acceptance of contract.

Normally, dispute meetings shall be conducted at or near the project site. However, any location that would be more convenient and still provide required facilities and access to necessary documentation shall be satisfactory.

Both parties shall be given the opportunity to present their evidence at these dispute meetings. It is expressly understood that the DRB members are to act impartially and independently in the consideration of the contract provisions, applicable laws and regulations, and the facts and conditions surrounding any dispute presented by either party, and that the recommendations concerning any such dispute are advisory and nonbinding on the parties.

The DRB may request that written documentation and arguments from both parties be sent to each DRB member, through the DRB Chairperson, for review before the dispute meeting begins. A party furnishing written documentation to the DRB shall furnish copies of such information to the other party at the same time that such information is supplied to the DRB.

DRB dispute meetings shall be informal. There shall be no testimony under oath or cross-examination. There shall be no reporting of the procedures by a shorthand reporter or by electronic means. Documents and verbal statements shall be received by the DRB in conformance with acceptance standards established by the DRB. These standards need not comply with prescribed legal laws of evidence.

The third DRB member shall act as Chairperson for dispute meetings and all other DRB activities. The parties shall have a representative at all dispute meetings. Failure to attend a duly noticed dispute meeting by either of the parties shall be conclusively considered by the DRB as indication that the non-attending party considers written submittals as their entire and complete argument. The claimant shall discuss the dispute, followed by the other party. Each party shall then be allowed one or more rebuttals until all aspects of the dispute are thoroughly covered. DRB members shall ask questions, seek clarification, and request further data from either of the parties as may be necessary to assist in making a fully informed recommendation. The DRB may request from either party documents or information that would assist the DRB in making its findings and recommendations including, but not limited to, documents used by the CONTRACTOR in preparing the bid for the project. A refusal by a party to provide information requested by the DRB may be considered by the DRB as an indication that the requested material would tend to disprove that party's position. In large or complex cases, additional dispute meetings may be necessary in order to consider all the evidence presented by both parties. All involved parties shall maintain the confidentiality of all documents and information, as provided in this AGREEMENT.

During dispute meetings, no DRB member shall express an opinion concerning the merit of any facet of the case. DRB deliberations shall be conducted in private, with interim individual views kept strictly confidential.

After dispute meetings are concluded, the DRB shall meet in private and reach a conclusion supported by 2 or more members. Private sessions of the DRB may be held at a location other than the job site or by electronic conferencing as deemed appropriate, in order to expedite the process.

The DRB's findings and recommendations, along with discussion of reasons therefor, shall then be submitted as a written report to both parties. Recommendations shall be based on the pertinent contract provisions, applicable laws and regulations, and facts and circumstances related to the dispute. The report shall be thorough in discussing the facts considered, the contract language, law or regulation viewed by the DRB as pertinent to the issues, and the DRB's interpretation and philosophy in arriving at its conclusions and recommendations. The DRB's report shall stand on its own, without attachments or appendices. The DRB Chairperson shall furnish a copy of the written recommendation report to the DRB Coordinator, Division of Construction, MS 44, P.O. Box 942874, Sacramento, CA 94274.

With prior written approval of both parties, the DRB may obtain technical services necessary to adequately review the disputes presented, including audit, geotechnical, schedule analysis and other services. The parties' technical staff may supply those services as appropriate. The cost of technical services, as agreed to by the parties, shall be borne equally by the 2 parties as specified in an approved contract change order. The CONTRACTOR will not be entitled to markups for the payments made for these services.

The DRB shall resist submittal of incremental portions of information by either party, in the interest of making a fully informed decision and recommendation.

The DRB shall make every effort to reach a unanimous decision. If this proves impossible, the dissenting member shall prepare a minority opinion, which shall be included in the DRB's report.

Although both parties should place weight upon the DRB's recommendations, they are not binding. Either party may appeal a recommendation to the DRB for reconsideration. However, reconsideration shall only be allowed when there is new evidence to present, and the DRB shall accept only one appeal from each party pertaining to an individual DRB recommendation. The DRB shall hear appeals in conformance with the terms described in the Section entitled "Dispute Review Board" in the special provisions.

**E. DRB MEMBER REPLACEMENT**

Should the need arise to appoint a replacement DRB member, the replacement DRB member shall be appointed in the same manner as the original DRB members were appointed. The selection of a replacement DRB member shall begin promptly upon notification of the necessity for a replacement and shall be completed within 15 days. This AGREEMENT shall be amended to indicate change in DRB membership.

**SECTION III CONTRACTOR RESPONSIBILITIES**

The CONTRACTOR shall furnish to each DRB member one copy of pertinent documents that are or may become necessary for the DRB to perform their function. Pertinent documents are written notices of potential claim, responses to those notices, drawings or sketches, calculations, procedures, schedules, estimates, or other documents which are used in the performance of the work or in justifying or substantiating the CONTRACTOR's position. The CONTRACTOR shall also furnish a copy of such pertinent documents to the STATE, in conformance with the terms outlined in the special provisions.

**SECTION IV STATE RESPONSIBILITIES**

The STATE will furnish the following services and items:

**A. CONTRACT RELATED DOCUMENTS**

The STATE will furnish to each DRB member one copy of Notice to Contractors and Special Provisions, Proposal and Contract, Plans, Standard Specifications, and Standard Plans, change orders, written instructions issued by the STATE to the CONTRACTOR, or other documents pertinent to any dispute that has been referred to the DRB and necessary for the DRB to perform its function.

**B. COORDINATION AND SERVICES**

The STATE, through the Engineer, will, in cooperation with the CONTRACTOR, coordinate the operations of the DRB. The Engineer will arrange or provide conference facilities at or near the project site and provide secretarial and copying services to the DRB without charge to the CONTRACTOR.

**SECTION V TIME FOR BEGINNING AND COMPLETION**

Once established, the DRB shall be in operation until the day of acceptance of the contract. The DRB members shall not begin work under the terms of this AGREEMENT until authorized in writing by the STATE.

**SECTION VI PAYMENT**

**A. ALL INCLUSIVE RATE PAYMENT**

The STATE and the CONTRACTOR shall bear the costs and expenses of the DRB equally. Each DRB member shall be compensated at an agreed rate of $1,200 per day if time spent per meeting, including on-site time plus one hour of travel time, is greater than 4 hours. Each DRB member shall be compensated at an agreed rate of $700 per day if time spent per meeting, including on-site time plus one hour of travel time, is less than or equal to 4 hours. The agreed rates shall be considered full compensation for on-site time, travel expenses, transportation, lodging, time for travel and incidentals for each day, or portion thereof, that the DRB member is at an authorized DRB meeting. No additional compensation will be made for time spent by DRB members in review and research activities outside the official DRB meetings unless that time has been specifically agreed to in advance by the STATE and CONTRACTOR. Time away from the project that has been specifically agreed to in advance by the parties will be compensated at an agreed rate of $125 per hour. The agreed amount of $125 per hour shall include all incidentals including expenses for telephone, fax, and computer services. Members serving on more than one DRB involving the State, regardless of the number of meetings per day, shall not be paid more than the all inclusive rate per day or rate per hour for an individual project. The STATE will provide, at no cost to the CONTRACTOR, administrative services such as conference facilities and secretarial services to the DRB.

**B. PAYMENTS**

DRB members shall be compensated at the same rate. The CONTRACTOR shall make direct payments to each DRB member for their participation in authorized meetings and approved hourly rate charges from invoices submitted by each DRB member. The STATE will reimburse the CONTRACTOR for its share of the costs of the DRB.

The DRB members may submit invoices to the CONTRACTOR for partial payment for work performed and services rendered for their participation in authorized meetings not more often than once per month during the progress of the work. The invoices shall be in a format approved by the parties and accompanied by a general description of activities performed during that billing period. Payment for hourly fees, at the agreed rate, shall not be paid to a DRB member until the amount and extent of those fees are approved by the STATE and CONTRACTOR.

Invoices shall be accompanied by original supporting documents, which the CONTRACTOR shall include with the extra work billing when submitting for reimbursement of the STATE's share of cost from the STATE. The CONTRACTOR will be reimbursed for one-half of approved costs of the DRB. No markups will be added to the CONTRACTOR's payment.

**C. INSPECTION OF COSTS RECORDS**

The DRB members and the CONTRACTOR shall keep available for inspection by representatives of the STATE and the United States, for a period of 3 years after final payment, the cost records and accounts pertaining to this AGREEMENT. If any litigation, claim, or audit arising out of, in connection with, or related to this contract is initiated before the expiration of the 3-year period, the cost records and accounts shall be retained until such litigation, claim, or audit involving the records is completed.

**SECTION VII ASSIGNMENT OF TASKS OF WORK**

The DRB members shall not assign the work of this AGREEMENT.

**SECTION VIII TERMINATION OF DRB MEMBERS**

DRB members may resign from the DRB by providing not less than 15 days written notice of the resignation to the STATE and CONTRACTOR. DRB members may be terminated by their original appointing power or by either party, for failing to fully comply at all times with all required employment and financial disclosure conditions of DRB membership in conformance with the terms of the contract.

**SECTION IX LEGAL RELATIONS**

The parties hereto mutually understand and agree that the DRB member in the performance of duties on the DRB, is acting in the capacity of an independent agent and not as an employee of either party.

No party to this AGREEMENT shall bear a greater responsibility for damages or personal injury than is normally provided by Federal or State of California Law.

Notwithstanding the provisions of this contract that require the CONTRACTOR to indemnify and hold harmless the STATE, the parties shall jointly indemnify and hold harmless the DRB members from and against all claims, damages, losses, and expenses, including but not limited to attorney's fees, arising out of and resulting from the findings and recommendations of the DRB.

**SECTION X CONFIDENTIALITY**

The parties hereto mutually understand and agree that all documents and records provided by the parties in reference to issues brought before the DRB, which documents and records are marked "Confidential - for use by the DRB only," shall be kept in confidence and used only for the purpose of resolution of subject disputes, and for assisting in development of DRB findings and recommendations; that such documents and records will not be utilized or revealed to others, except to officials of the parties who are authorized to act on the subject disputes, for any purposes, during the life of the DRB. Upon termination of this AGREEMENT, said confidential documents and records, and all copies thereof, shall be returned to the parties who furnished them to the DRB. However, the parties understand that such documents shall be subsequently discoverable and admissible in court or arbitration proceedings unless a protective order has been obtained by the party seeking further confidentiality.

**SECTION XI DISPUTES**

Disputes between the parties hereto, including disputes between the DRB members and either party or both parties, arising out of the work or other terms of this AGREEMENT, which cannot be resolved by negotiation and mutual concurrence between the parties, or through the administrative process provided in the contract, shall be resolved by arbitration as provided in Section 9-1.10, "Arbitration," of the Standard Specifications.

**SECTION XII VENUE, APPLICABLE LAW, AND PERSONAL JURISDICTION**

In the event that any party, including an individual member of the DRB, deems it necessary to institute arbitration proceedings to enforce any right or obligation under this AGREEMENT, the parties hereto agree that such action shall be initiated in the Office of Administrative Hearings of the State of California. The parties hereto agree that all questions shall be resolved by arbitration by application of California law and that the parties to such arbitration shall have the right of appeal from such decisions to the Superior Court in conformance with the laws of the State of California. Venue for the arbitration shall be Sacramento or any other location as agreed to by the parties.

**SECTION XIII FEDERAL REVIEW AND REQUIREMENTS**

On Federal-Aid contracts, the Federal Highway Administration shall have the right to review the work of the DRB in progress, except for private meetings or deliberations of the DRB.

Other Federal requirements in this agreement shall only apply to Federal-Aid contracts.

**SECTION XIV CERTIFICATION OF THE CONTRACTOR, THE DRB MEMBERS, AND THE STATE**

IN WITNESS WHEREOF, the parties hereto have executed this AGREEMENT as of the day and year first above written.

DRB MEMBER

By: _____

Title: _____

DRB MEMBER

By: _____

Title :_____

DRB MEMBER

By :_____

Title :_____

CONTRACTOR

By: _____

Title: _____

CALIFORNIA STATE DEPARTMENT
OF TRANSPORTATION

By: _____

Title: _____

## 5-1.13 FORCE ACCOUNT PAYMENT

Payment for extra work at force account will be determined by either non-subcontracted or subcontracted force account payment unless otherwise specified.

**Non-Subcontracted Force Account Payment:**

When extra work to be paid for on a force account basis is performed by the Contractor, compensation will be determined in accordance with Section 9-1.03, "Force Account Payment," of the Standard Specifications and these special provisions.

The second, third and fourth paragraphs of Section 9-1.03A, "Work Performed by Contractor," in the Standard Specifications, shall not apply.

Attention is directed to "Time-Related Overhead" of these special provisions.

To the total of the direct costs for work performed on a force account basis, computed as provided in Sections 9-1.03A(1), "Labor," 9-1.03A(2), "Materials," and 9-1.03A(3), "Equipment Rental," of the Standard Specifications, there will be added the following markups:

| Cost | Percent Markup |
|---|---|
| Labor | 28 |
| Materials | 10 |
| Equipment Rental | 10 |

The above markups shall be applied to work performed on a force account basis, regardless of whether the work revises the current contract completion date.

The above markups, together with payments made for time-related overhead pursuant to "Time-Related Overhead" of these special provisions, shall constitute full compensation for all overhead costs for work performed on a force account basis. These overhead costs shall be deemed to include all items of expense not specifically designated as cost or equipment rental in conformance with the provisions in Sections 9-1.03A(1), "Labor," 9-1.03A(2), "Materials," and 9-1.03A(3), "Equipment Rental," of the Standard Specifications. The total payment made as provided above and in the first paragraph of Section 9-1.03A, "Work Performed by Contractor," of the Standard Specifications shall be deemed to be the actual cost of the work performed on a force account basis, and shall constitute full compensation therefor.

Full compensation for overhead costs for work performed on a force account basis, and for which no adjustment is made to the lump sum price bid for time-related overhead conforming to the provisions in "Time-Related Overhead" of these special provisions, shall be considered as included in the markups specified above, and no additional compensation will be allowed therefor.

**Subcontracted Force Account Payment:**

When extra work to be paid for on a force account basis is performed by a subcontractor approved in conformance with the provisions in Section 8-1.01, "Subcontracting," of the Standard Specifications, compensation will be determined in accordance with the provisions in Section 9-1.03, "Force Account Payment," of the Standard Specifications.

## 5-1.14 COMPENSATION ADJUSTMENTS FOR PRICE INDEX FLUCTUATIONS

The provisions of this section shall apply only to the following contract items:

| ITEM CODE | ITEM |
|---|---|
| 390155 | ASPHALT CONCRETE (TYPE A) |
| | |
| | |

The compensation payable for asphalt concrete and asphalt treated permeable base will be increased or decreased in conformance with the provisions of this section for paving asphalt price fluctuations exceeding 10 percent (Iu/Ib is greater than 1.10 or less than 0.90) which occur during performance of the work.

The adjustment in compensation will be determined in conformance with the following formulae when the item of asphalt concrete or asphalt treated permeable base (or both) is included in a monthly estimate:

A. Total monthly adjustment = AQ
B. For an increase in paving asphalt price index exceeding 10 percent:

$$A = 0.90\ (1.1023)\ (Iu/Ib - 1.10)\ Ib$$

C. For a decrease in paving asphalt price index exceeding 10 percent:

$$A = 0.90\ (1.1023)\ (Iu/Ib - 0.90)\ Ib$$

D. Where:

A = Adjustment in dollars per tonne of paving asphalt used to produce asphalt concrete and asphalt treated permeable base rounded to the nearest $0.01.
Iu = The California Statewide Paving Asphalt Price Index which is in effect on the first business day of the month within the pay period in which the quantity subject to adjustment was included in the estimate.
Ib = The California Statewide Paving Asphalt Price Index for the month in which the bid opening for the project occurred.
Q = Quantity in tonnes of paving asphalt that was used in producing the quantity of asphalt concrete shown under "This Estimate" on the monthly estimate using the amount of asphalt determined by the Engineer plus the quantity in tonnes of paving asphalt that would have been used in producing the quantity of asphalt treated permeable base shown under "This Estimate" on the monthly estimate using the amount of asphalt specified in the specifications.

The adjustment in compensation will also be subject to the following:

A. The compensation adjustments provided herein will be shown separately on payment estimates. The Contractor shall be liable to the State for decreased compensation adjustments and the Department may deduct the amount thereof from any moneys due or that may become due the Contractor.
B. Compensation adjustments made under this section will be taken into account in making adjustments in conformance with the provisions in Section 4-1.03B, "Increased or Decreased Quantities," of the Standard Specifications.
C. In the event of an overrun of contract time, adjustment in compensation for paving asphalt included in estimates during the overrun period will be determined using the California Statewide Paving Asphalt Price Index in effect on the first business day of the month within the pay period in which the overrun began.

The California Statewide Paving Asphalt Price Index is determined each month on the first business day of the month by the Department using the median of posted prices in effect as posted by Chevron, Mobil, and Unocal for the Buena Vista, Huntington Beach, Kern River, Long Beach, Midway Sunset, and Wilmington fields.

In the event that the companies discontinue posting their prices for a field, the Department will determine an index from the remaining posted prices. The Department reserves the right to include in the index determination the posted prices of additional fields.

**5-1.15 PAYMENTS**

Attention is directed to Sections 9-1.06, "Partial Payments," and 9-1.07, "Payment After Acceptance," of the Standard Specifications and these special provisions.

For the purpose of making partial payments pursuant to Section 9-1.06, "Partial Payments," of the Standard Specifications, the amount set forth for the contract items of work hereinafter listed shall be deemed to be the maximum value of the contract item of work which will be recognized for progress payment purposes:

| | | |
|---|---|---|
| A. | Clearing and Grubbing | $20,250.00 |
| B. | Develop Water Supply | $14,580.00 |
| C. | Prepare Water Pollution Control Program | $60,750.00 |
| D. | Prepare Storm Water Pollution Prevention Plan | $11,475.00 |
| E. | Progress Schedule (Critical Path Method) | $ 5,625.00 |
| F. | Bridge Removal (portion), Location A | $17,800.00 |
| G. | Bridge Removal (portion), Location B | $50,700.00 |
| H. | Bridge Removal (portion), Location C | $20,400.00 |
| I. | Bridge Removal (portion), Location D | $ 5,900.00 |
| J. | Bridge Removal (portion), Location E | $34,200.00 |

| | | |
|---|---|---|
| K. | Bridge Removal (portion), Location F | $14,600.00 |
| L. | Bridge Removal (portion), Location G | $19,600.00 |
| M. | Bridge Removal (portion), Location H | $15,500.00 |
| N. | Lead Compliance Plan | $ 3,726.00 |

After acceptance of the contract pursuant to the provisions in Section 7-1.17, "Acceptance of Contract," of the Standard Specifications, the amount, if any, payable for a contract item of work in excess of the maximum value for progress payment purposes hereinabove listed for the item, will be included for payment in the first estimate made after acceptance of the contract.

In determining the partial payments to be made to the Contractor, only the following listed materials will be considered for inclusion in the payment as materials furnished but not incorporated in the work:

A. Piling
B. Bar reinforcing steel
C. Irrigation Controllers
D. Irrigation controller enclosure cabinets
E. Plastic pipe (Supply Line)
F. Sprinklers
G. Valves and valve boxes
H. Backflow preventer assemblies
I. Backflow preventer assembly enclosures
J. Metal beam guard railing
K. Chain link fence
L. Soil Anchors
M. Prestressing Steel for Cast-in-Place Members (Sealed Packages only)
N. Prestressing Ducts and Anchorages
O. PTFE bearing
P. Sound Wall (Masonry Block)
Q. Type B Joint Seal
R. Chain Link Railing
S. Luminaires
T. Innerducts
U. Fiber Optic Conduit

**5-1.16 PROJECT INFORMATION**

The information in this section has been compiled specifically for this project and is made available for bidders and Contractors. Other information referenced in the Standard Specifications and these special provisions do not appear in this section. The information is subject to the conditions and limitations set forth in Section 2-1.03, "Examination of Plans, Specifications, Contract, and Site of Work," and Section 6-2, "Local Materials," of the Standard Specifications. Bidders and Contractors shall be responsible for knowing the procedures for obtaining information.

Information attached to the project plans is as follows:

A. Log of Test Borings.

Information included in the Information Handout provided to bidders and Contractors is as follows:

A. Final Foundation Recommendations for Campbell Street UC (Widen) (Bridge No. 56-0526 R/L).
B. Final Foundation Recommendations for Pyrite Street UC (Widen) (Bridge No. 56-0528 R/L).
C. Final Foundation Recommendations for Wineville Road UC (Widen) (Bridge No. 56-0601 R/L).
D. Final Foundation Recommendations for Mira Loma OH (Widen) (Bridge No. 56-0602 R/L).
E. Final Foundation Recommendations for Etiwanda Ave UC (Widen) (Bridge No. 56-0603 R/L).
F. Final Foundation Recommendations for Camino Real UC (Widen) (Bridge No. 56-0661 R/L).
G. Final Foundation Recommendations for Retaining Wall #58 (Bridge No. 56-SW58).
H. Supplemental Recommendations.
I. Foundation Reviews.

Information available for inspection at the District Office is as follows:

A. Aerial Lead Investigation dated June 2, 2001
B. California Deprtment Fish and Game Agreement
C. California Regional Water Quality Control Board: Permit No. 401

Cross sections are available in electronic copy.

The District Office in which the work is situated is located at 464 W. 4th Street, San Bernardino, CA 92401.

Plans of the existing bridges may be requested by fax from the Office of Structure Maintenance and Investigations, 1801 30th Street, Sacramento, CA, Fax (916) 227-8357, and are available at the Office of Structure Maintenance and Investigations, Los Angeles, CA, Telephone (213) 897-0877.

Plans of the existing bridges available to bidders and Contractors are reproductions of the original contract plans, with significant changes noted, and working drawings, and do not necessarily show normal construction tolerances and variances. Where dimensions of new construction required by this contract are dependent on the dimensions of the existing bridges, the Contractor shall verify the controlling field dimensions and shall be responsible for adjusting dimensions of the work to fit existing conditions.

## 5-1.17 RELATIONS WITH CALIFORNIA DEPARTMENT OF FISH AND GAME

A portion of this project is located within the jurisdiction of the California Department of Fish and Game. An agreement regarding a stream or lake has been entered into by the Department of Transportation and the Department of Fish and Game. The Contractor shall be fully informed of the requirements of this agreement as well as rules, regulations, and conditions that may govern the Contractor's operations in these areas and shall conduct the work accordingly.

Copies of the agreement may be obtained at the Department of Transportation, Plans and Bid Documents Section, MS 26, 1120 N Street, Room 200, Sacramento, CA 95814, Telephone 916-654-4490, and are available for inspection at the office of the District Director of Transportation at 464 W 4th Street, San Bernardino, CA 92401-1400.

It is unlawful for any person to divert, obstruct or change the natural flow of the bed, channel or bank of a stream, river or lake without first notifying the Department of Fish and Game, unless the project or activity is noticed and constructed in conformance with conditions imposed under Fish and Game Code Section 1601.

Attention is directed to Sections 7-1.01, "Laws to be Observed," 7-1.01G, "Water Pollution," and 7-1.12, "Indemnification and Insurance," of the Standard Specifications.

Modifications to the agreement between the Department of Transportation and the Department of Fish and Game which are proposed by the Contractor shall be submitted in writing to the Engineer for transmittal to the Department of Fish and Game for their consideration.

When the Contractor is notified by the Engineer that a modification to the agreement is under consideration, no work shall be performed which is inconsistent with the original agreement or proposed modification until the Departments take action on the proposed modifications. Compensation for delay will be determined in conformance with the provisions in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

The provisions of this section shall be made a part of every subcontract executed pursuant to this contract.

Modifications to any agreement between the Department of Transportation and the Department of Fish and Game will be fully binding on the Contractor. The provisions of this section shall be made a part of every subcontract executed pursuant to this contract.

## 5-1.18 RELATIONS WITH CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD

The location of the project is within an area controlled by the Regional Water Quality Control Board. Regional Water Quality Control Board No 401 permit has been issued covering work to be performed under this contract. The Contractor shall be fully informed of rules, regulations, and conditions that may govern the Contractor's operations in the areas and shall conduct the work accordingly.

Copies of the order may be obtained at the Department of Transportation, Plans and Bid Documents Section, MS 26, 1120 N Street, Room 200, Sacramento, CA 95814, Telephone 916-654-4490, and are available for inspection at the office of the District Director of Transportation at 464 W. 4th Street, San Bernardino, CA 92401-1400.

Attention is directed to Section 7-1.11, "Preservation of Property," and Section 7-1.12, "Indemnification and Insurance," of the Standard Specifications.

Attention is directed to Section 8-1.06, "Time of Completion," of the Standard Specifications. Days during which the Contractor's operations are restricted in the floodway by the requirements of this section shall be considered to be nonworking days if these restrictions cause a delay in the current controlling operation or operations.

### 5-1.19 AERIALLY DEPOSITED LEAD

Aerially deposited lead is present within the project limits. Aerially deposited lead is lead deposited within unpaved areas or formerly unpaved areas, primarily due to vehicle emissions.

Attention is directed to "Material Containing Aerially Deposited Lead" and "Project Information" of these special provisions.

Portions of the site investigation report are included in the "Material Information" handout. The complete report, entitled "Aerial Lead Investigation June 2, 2001," is available for inspection at the Department of Transportation, Environmental Engineering, 464 West 4th Street, San Bernardino, CA 92401-1401.

Once the Contractor has completed the placement of material containing aerially deposited lead in conformance with these special provisions and as directed by the Engineer, the Contractor shall have no responsibility for such materials. The Department will not consider the Contractor a generator of such contaminated materials.

Excavation, reuse, and disposal of material with aerially deposited lead shall be in conformance with all rules and regulations including, but not limited to, those of the following agencies:

A. United States Department of Transportation,
B. United States Environmental Protection Agency,
C. California Environmental Protection Agency,
D. California Department of Health Services,
E. Department of Toxic Substances Control,
F. California Division of Occupational Safety and Health Administration,
G. Integrated Waste Management Board,
H. Regional Water Quality Control Board, Region 8,
I. State Air Resources Control Board, and
J. South Coast Air Quality Management District.

Materials containing hazardous levels of lead shall be transported and disposed of in conformance with Federal and State laws and regulations, as amended, and county and municipal ordinances and regulations, as amended. Laws and regulations that govern this work include, but are not limited to:

A. Health and Safety Code, Division 20, Chapter 6.5 (California Hazardous Waste Control Act),
B. Title 22, California Code of Regulations, Division 4.5 (Environmental Health Standards for the Management of Hazardous Waste), and
C. Title 8, California Code of Regulations.

## SECTION 6. (BLANK)

## SECTION 7. (BLANK)

## SECTION 8. MATERIALS

## SECTION 8-1. MISCELLANEOUS

### 8-1.01 SUBSTITUTION OF NON-METRIC MATERIALS AND PRODUCTS

Only materials and products conforming to the requirements of the specifications shall be incorporated in the work. When metric materials and products are not available, and when approved by the Engineer, and at no cost to the State, materials and products in the United States Standard Measures which are of equal quality and of the required properties and characteristics for the purpose intended, may be substituted for the equivalent metric materials and products, subject to the following provisions:

A. Materials and products shown on the plans or in the special provisions as being equivalent may be substituted for the metric materials and products specified or detailed on the plans.
B. Before other non-metric materials and products will be considered for use, the Contractor shall furnish, at the Contractor's expense, evidence satisfactory to the Engineer that the materials and products proposed for use are equal to or better than the materials and products specified or detailed on the plans. The burden of proof as to the quality and suitability of substitutions shall be upon the Contractor and the Contractor shall furnish necessary information as required by the Engineer. The Engineer will be the sole judge as to the quality and suitability of the substituted materials and products and the Engineer's decision will be final.

C. When the Contractor elects to substitute non-metric materials and products, including materials and products shown on the plans or in the special provisions as being equivalent, the list of sources of material specified in Section 6-1.01, "Source of Supply and Quality of Materials," of the Standard Specification shall include a list of substitutions to be made and contract items involved. In addition, for a change in design or details, the Contractor shall submit plans and working drawings in conformance with the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications. The plans and working drawings shall be submitted at least 7 days before the Contractor intends to begin the work involved.

Unless otherwise specified, the following substitutions of materials and products will be allowed:

SUBSTITUTION TABLE FOR PLAIN WIRE REINFORCEMENT
ASTM Designation: A 82

| METRIC SIZE SHOWN ON THE PLANS $mm^2$ | SIZE TO BE SUBSTITUTED $inch^2$ x 100 |
|---|---|
| MW9 | W1.4 |
| MW10 | W1.6 |
| MW13 | W2.0 |
| MW15 | W2.3 |
| MW19 | W2.9 |
| MW20 | W3.1 |
| MW22 | W3.5 |
| MW25 | W3.9, except W3.5 in piles only |
| MW26 | W4.0 |
| MW30 | W4.7 |
| MW32 | W5.0 |
| MW35 | W5.4 |
| MW40 | W6.2 |
| MW45 | W6.5 |
| MW50 | W7.8 |
| MW55 | W8.5, except W8.0 in piles only |
| MW60 | W9.3 |
| MW70 | W10.9, except W11.0 in piles only |
| MW80 | W12.4 |
| MW90 | W14.0 |
| MW100 | W15.5 |

SUBSTITUTION TABLE FOR BAR REINFORCEMENT

| METRIC BAR DESIGNATION NUMBER[1] SHOWN ON THE PLANS | BAR DESIGNATION NUMBER[2] TO BE SUBSTITUTED |
|---|---|
| 10 | 3 |
| 13 | 4 |
| 16 | 5 |
| 19 | 6 |
| 22 | 7 |
| 25 | 8 |
| 29 | 9 |
| 32 | 10 |
| 36 | 11 |
| 43 | 14 |
| 57 | 18 |

[1]Bar designation numbers approximate the number of millimeters of the nominal diameter of the bars.

[2]Bar numbers are based on the number of eighths of an inch included in the nominal diameter of the bars.

No adjustment will be required in spacing or total number of reinforcing bars due to a difference in minimum yield strength between metric and non-metric bars.

SUBSTITUTION TABLE FOR SIZES OF:

(1) STEEL FASTENERS FOR GENERAL APPLICATIONS (ASTM Designation: A 307 or AASHTO Designation: M 314, Grade 36 or 55), and

(2) HIGH STRENGTH STEEL FASTENERS (ASTM Designation: A 325 or A 449)

| METRIC SIZE SHOWN ON THE PLANS mm | SIZE TO BE SUBSTITUTED inch |
|---|---|
| 6 or 6.35 | 1/4 |
| 8 or 7.94 | 5/16 |
| 10 or 9.52 | 3/8 |
| 11 or 11.11 | 7/16 |
| 13, 12.70, or M12 | 1/2 |
| 14 or 14.29 | 9/16 |
| 16, 15.88, or M16 | 5/8 |
| 19, 19.05, or M20 | 3/4 |
| 22, 22.22, or M22 | 7/8 |
| 24, 25, 25.40, or M24 | 1 |
| 29, 28.58, or M27 | 1-1/8 |
| 32, 31.75, or M30 | 1-1/4 |
| 35 or 34.93 | 1-3/8 |
| 38, 38.10, or M36 | 1-1/2 |
| 44 or 44.45 | 1-3/4 |
| 51 or 50.80 | 2 |
| 57 or 57.15 | 2-1/4 |
| 64 or 63.50 | 2-1/2 |
| 70 or 69.85 | 2-3/4 |
| 76 or 76.20 | 3 |
| 83 or 82.55 | 3-1/4 |
| 89 or 88.90 | 3-1/2 |
| 95 or 95.25 | 3-3/4 |
| 102 or 101.60 | 4 |

SUBSTITUTION TABLE FOR NOMINAL THICKNESS OF SHEET METAL

| UNCOATED HOT AND COLD ROLLED SHEETS | | HOT-DIPPED ZINC COATED SHEETS (GALVANIZED) | |
|---|---|---|---|
| METRIC THICKNESS SHOWN ON THE PLANS mm | GAGE TO BE SUBSTITUTED inch | METRIC THICKNESS SHOWN ON THE PLANS mm | GAGE TO BE SUBSTITUTED inch |
| 7.94 | 0.3125 | 4.270 | 0.1681 |
| 6.07 | 0.2391 | 3.891 | 0.1532 |
| 5.69 | 0.2242 | 3.510 | 0.1382 |
| 5.31 | 0.2092 | 3.132 | 0.1233 |
| 4.94 | 0.1943 | 2.753 | 0.1084 |
| 4.55 | 0.1793 | 2.372 | 0.0934 |
| 4.18 | 0.1644 | 1.994 | 0.0785 |
| 3.80 | 0.1495 | 1.803 | 0.0710 |
| 3.42 | 0.1345 | 1.613 | 0.0635 |
| 3.04 | 0.1196 | 1.461 | 0.0575 |
| 2.66 | 0.1046 | 1.311 | 0.0516 |
| 2.28 | 0.0897 | 1.158 | 0.0456 |
| 1.90 | 0.0747 | 1.006 or 1.016 | 0.0396 |
| 1.71 | 0.0673 | 0.930 | 0.0366 |
| 1.52 | 0.0598 | 0.853 | 0.0336 |
| 1.37 | 0.0538 | 0.777 | 0.0306 |
| 1.21 | 0.0478 | 0.701 | 0.0276 |
| 1.06 | 0.0418 | 0.627 | 0.0247 |
| 0.91 | 0.0359 | 0.551 | 0.0217 |
| 0.84 | 0.0329 | 0.513 | 0.0202 |
| 0.76 | 0.0299 | 0.475 | 0.0187 |
| 0.68 | 0.0269 | -------- | -------- |
| 0.61 | 0.0239 | -------- | -------- |
| 0.53 | 0.0209 | -------- | -------- |
| 0.45 | 0.0179 | -------- | -------- |
| 0.42 | 0.0164 | -------- | -------- |
| 0.38 | 0.0149 | -------- | -------- |

SUBSTITUTION TABLE FOR WIRE

| METRIC THICKNESS SHOWN ON THE PLANS mm | WIRE THICKNESS TO BE SUBSTITUTED inch | GAGE NO. |
|---|---|---|
| 6.20 | 0.244 | 3 |
| 5.72 | 0.225 | 4 |
| 5.26 | 0.207 | 5 |
| 4.88 | 0.192 | 6 |
| 4.50 | 0.177 | 7 |
| 4.11 | 0.162 | 8 |
| 3.76 | 0.148 | 9 |
| 3.43 | 0.135 | 10 |
| 3.05 | 0.120 | 11 |
| 2.69 | 0.106 | 12 |
| 2.34 | 0.092 | 13 |
| 2.03 | 0.080 | 14 |
| 1.83 | 0.072 | 15 |
| 1.57 | 0.062 | 16 |
| 1.37 | 0.054 | 17 |
| 1.22 | 0.048 | 18 |
| 1.04 | 0.041 | 19 |
| 0.89 | 0.035 | 20 |

SUBSTITUTION TABLE FOR PIPE PILES

| METRIC SIZE SHOWN ON THE PLANS mm x mm | SIZE TO BE SUBSTITUTED inch x inch |
|---|---|
| PP 360 x 4.55 | NPS 14 x 0.179 |
| PP 360 x 6.35 | NPS 14 x 0.250 |
| PP 360 x 9.53 | NPS 14 x 0.375 |
| PP 360 x 11.12 | NPS 14 x 0.438 |
| PP 406 x 12.70 | NPS 16 x 0.500 |
| PP 460 x T | NPS 18 x T" |
| PP 508 x T | NPS 20 x T" |
| PP 559 x T | NPS 22 x T" |
| PP 610 x T | NPS 24 x T" |
| PP 660 x T | NPS 26 x T" |
| PP 711 x T | NPS 28 x T" |
| PP 762 x T | NPS 30 x T" |
| PP 813 x T | NPS 32 x T" |
| PP 864 x T | NPS 34 x T" |
| PP 914 x T | NPS 36 x T" |
| PP 965 x T | NPS 38 x T" |
| PP 1016 x T | NPS 40 x T" |
| PP 1067 x T | NPS 42 x T" |
| PP 1118 x T | NPS 44 x T" |
| PP 1219 x T | NPS 48 x T" |
| PP 1524 x T | NPS 60 x T" |

The thickness in millimeters (T) represents an exact conversion of the thickness in inches (T").

SUBSTITUTION TABLE FOR CIDH CONCRETE PILING

| METRIC SIZE SHOWN ON THE PLANS | ACTUAL AUGER SIZE TO BE SUBSTITUTED inches |
|---|---|
| 350 mm | 14 |
| 400 mm | 16 |
| 450 mm | 18 |
| 600 mm | 24 |
| 750 mm | 30 |
| 900 mm | 36 |
| 1.0 m | 42 |
| 1.2 m | 48 |
| 1.5 m | 60 |
| 1.8 m | 72 |
| 2.1 m | 84 |
| 2.4 m | 96 |
| 2.7 m | 108 |
| 3.0 m | 120 |
| 3.3 m | 132 |
| 3.6 m | 144 |
| 4.0 m | 156 |
| | |
| | |
| | |
| | |

SUBSTITUTION TABLE FOR STRUCTURAL TIMBER AND LUMBER

| METRIC MINIMUM DRESSED DRY, SHOWN ON THE PLANS mm x mm | METRIC MINIMUM DRESSED GREEN, SHOWN ON THE PLANS mm x mm | NOMINAL SIZE TO BE SUBSTITUTED inch x inch |
|---|---|---|
| 19x89 | 20x90 | 1x4 |
| 38x89 | 40x90 | 2x4 |
| 64x89 | 65x90 | 3x4 |
| 89x89 | 90x90 | 4x4 |
| 140x140 | 143x143 | 6x6 |
| 140x184 | 143x190 | 6x8 |
| 184x184 | 190x190 | 8x8 |
| 235x235 | 241x241 | 10x10 |
| 286x286 | 292x292 | 12x12 |

SUBSTITUTION TABLE FOR NAILS AND SPIKES

| METRIC COMMON NAIL, SHOWN ON THE PLANS<br><br>Length, mm<br>Diameter, mm | METRIC BOX NAIL, SHOWN ON THE PLANS<br><br>Length, mm<br>Diameter, mm | METRIC SPIKE, SHOWN ON THE PLANS<br>Length, mm<br>Diameter, mm | SIZE TO BE SUBSTITUTED<br>Penny-weight |
|---|---|---|---|
| 50.80<br>2.87 | 50.80<br>2.51 | _____ | 6d |
| 63.50<br>3.33 | 63.50<br>2.87 | _____ | 8d |
| 76.20<br>3.76 | 76.20<br>3.25 | 76.20<br>4.88 | 10d |
| 82.55<br>3.76 | 82.55<br>3.25 | 82.55<br>4.88 | 12d |
| 88.90<br>4.11 | 88.90<br>3.43 | 88.90<br>5.26 | 16d |
| 101.60<br>4.88 | 101.60<br>3.76 | 101.60<br>5.72 | 20d |
| 114.30<br>5.26 | 114.30<br>3.76 | 114.30<br>6.20 | 30d |
| 127.00<br>5.72 | 127.00<br>4.11 | 127.00<br>6.68 | 40d |
| _____ | _____ | 139.70<br>7.19 | 50d |
| _____ | _____ | 152.40<br>7.19 | 60d |

SUBSTITUTION TABLE FOR IRRIGATION COMPONENTS

| METRIC WATER METERS, TRUCK LOADING STANDPIPES, VALVES, BACKFLOW PREVENTERS, FLOW SENSORS, WYE STRAINERS, FILTER ASSEMBLY UNITS, PIPE SUPPLY LINES, AND PIPE IRRIGATION SUPPLY LINES SHOWN ON THE PLANS DIAMETER NOMINAL (DN) mm | NOMINAL SIZE TO BE SUBSTITUTED inch |
|---|---|
| 15 | 1/2 |
| 20 | 3/4 |
| 25 | 1 |
| 32 | 1-1/4 |
| 40 | 1-1/2 |
| 50 | 2 |
| 65 | 2-1/2 |
| 75 | 3 |
| 100 | 4 |
| 150 | 6 |
| 200 | 8 |
| 250 | 10 |
| 300 | 12 |
| 350 | 14 |
| 400 | 16 |

Unless otherwise specified, substitutions of United States Standard Measures standard structural shapes corresponding to the metric designations shown on the plans and in conformance with the requirements in ASTM Designation: A 6/A 6M, Annex 2, will be allowed.

**8-1.02 PREQUALIFIED AND TESTED SIGNING AND DELINEATION MATERIALS**

The Department maintains the following list of Prequalified and Tested Signing and Delineation Materials. The Engineer shall not be precluded from sampling and testing products on the list of Prequalified and Tested Signing and Delineation Materials.

The manufacturer of products on the list of Prequalified and Tested Signing and Delineation Materials shall furnish the Engineer a Certificate of Compliance in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications for each type of traffic product supplied.

For those categories of materials included on the list of Prequalified and Tested Signing and Delineation Materials, only those products shown within the listing may be used in the work. Other categories of products, not included on the list of Prequalified and Tested Signing and Delineation Materials, may be used in the work provided they conform to the requirements of the Standard Specifications.

Materials and products may be added to the list of Prequalified and Tested Signing and Delineation Materials if the manufacturer submits a New Product Information Form to the New Product Coordinator at the Transportation Laboratory. Upon a Departmental request for samples, sufficient samples shall be submitted to permit performance of required tests. Approval of materials or products will depend upon compliance with the specifications and tests the Department may elect to perform.

**PAVEMENT MARKERS, PERMANENT TYPE**

**Retroreflective With Abrasion Resistant Surface (ARS)**

A. Apex, Model 921AR (100 mm x 100 mm)
B. Avery Dennison, Models C88 (100 mm x 100 mm), 911 (100 mm x 100 mm) and 953 (70 mm x 114 mm)
C. Ray-O-Lite, Model "AA" ARS (100 mm x 100 mm)
D. 3M Series 290 (89 mm x 100 mm)
E. 3M Series 290 PSA, with pressure sensitive adhesive pad (89 mm x 100 mm)

**Retroreflective With Abrasion Resistant Surface (ARS)**

(for recessed applications only)

A. Avery Dennison, Model 948 (58 mm x 119 mm)
B. Avery Dennison, Model 944SB (51 mm x 100 mm)*
C. Ray-O-Lite, Model 2002 (58 mm x 117 mm)
D. Ray-O-Lite, Model 2004 ARS (51 mm x 100 mm)*

*For use only in 114 mm wide (older) recessed slots

**Non-Reflective, 100 mm Round**

A. Apex Universal (Ceramic)
B. Apex Universal, Models 929 (ABS) and 929PP (Polypropylene)
C. Glowlite, Inc., (Ceramic)
D. Hi-Way Safety, Inc., Models P20-2000W and 2001Y (ABS)
E. Interstate Sales, "Diamond Back" (ABS) and (Polypropylene)
F. Novabrite Models Cdot (White) Cdot-y (Yellow), Ceramic
G. Novabrite Models Pdot-w (White) Pdot-y (Yellow), Polypropylene
H. Road Creations, Model RCB4NR (Acrylic)
I. Three D Traffic Works TD10000 (ABS), TD10500 (Polypropylene)

**PAVEMENT MARKERS, TEMPORARY TYPE**

**Temporary Markers For Long Term Day/Night Use (6 months or less)**

A. Vega Molded Products "Temporary Road Marker" (75 mm x 100 mm)

**Temporary Markers For Short Term Day/Night Use (14 days or less)**

(For seal coat or chip seal applications, clear protective covers are required)

A. Apex Universal, Model 932
B. Bunzl Extrusion, Models T.O.M., T.R.P.M., and "HH" (High Heat)
C. Hi-Way Safety, Inc., Model 1280/1281
D. Glowlite, Inc., Model 932

**STRIPING AND PAVEMENT MARKING MATERIAL**

**Permanent Traffic Striping and Pavement Marking Tape**

A. Advanced Traffic Marking, Series 300 and 400
B. Brite-Line, Series 1000
C. Brite-Line, "DeltaLine XRP"
D. Swarco Industries, "Director 35" (For transverse application only)
E. Swarco Industries, "Director 60"
F. 3M, "Stamark" Series 380 and 5730
G. 3M, "Stamark" Series 420 (For transverse application only)

**Temporary (Removable) Striping and Pavement Marking Tape (6 months or less)**

A. Advanced Traffic Marking, Series 200
B. Brite-Line, Series 100
C. Garlock Rubber Technologies, Series 2000
D. P.B. Laminations, Aztec, Grade 102
E. Swarco Industries, "Director-2"
F. Trelleborg Industri, R140 Series
G. 3M, Series 620 "CR", and Series A750
H. 3M, Series A145, Removable Black Line Mask

(Black Tape: for use only on Asphalt Concrete Surfaces)

I. Advanced Traffic Marking Black "Hide-A-Line"
(Black Tape: for use only on Asphalt Concrete Surfaces)

J. Brite-Line "BTR" Black Removable Tape
(Black Tape: for use only on Asphalt Concrete Surfaces)

K. Trelleborg Industri, RB-140
(Black Tape: for use only on Asphalt Concrete Surfaces)

**Preformed Thermoplastic (Heated in place)**

A. Avery Dennison, "Hotape"
B. Flint Trading, "Premark," "Premark 20/20 Flex," and "Premark 20/20 Flex Plus"

**Ceramic Surfacing Laminate, 150 mm x 150 mm**

A. Highway Ceramics, Inc.

**CLASS 1 DELINEATORS**

**One Piece Driveable Flexible Type, 1700 mm**

A. Bunzl Extrusion, "Flexi-Guide Models 400 and 566"
B. Carsonite, Curve-Flex CFRM-400
C. Carsonite, Roadmarker CRM-375
D. FlexStake, Model 654 TM
E. GreenLine Models HWD1-66 and CGD1-66

**Special Use Type, 1700 mm**

A. Bunzl Extrusion, Model FG 560 (with 450 mm U-Channel base)
B. Carsonite, "Survivor" (with 450 mm U-Channel base)
C. Carsonite, Roadmarker CRM-375 (with 450 mm U-Channel base)
D. FlexStake, Model 604
E. GreenLine Models HWDU and CGD (with 450 mm U-Channel base)
F. Impact Recovery Model D36, with #105 Driveable Base
G. Safe-Hit with 200 mm pavement anchor (SH248-GP1)
H. Safe-Hit with 380 mm soil anchor (SH248-GP2) and with 450 mm soil anchor (SH248-GP3)

**Surface Mount Type, 1200 mm**

A. Bent Manufacturing Company, Masterflex Model MF-180EX-48
B. Carsonite, "Super Duck II"
C. FlexStake, Surface Mount, Models 704 and 754 TM
D. Impact Recovery Model D48, with #101 Fixed (Surface-Mount) Base
E. Three D Traffic Works "Channelflex" ID No. 522248W

**CHANNELIZERS**

**Surface Mount Type, 900 mm**

A. Bent Manufacturing Company, Masterflex Models MF-360-36 (Round) and MF-180-36 (Flat)
B. Bunzl Extrusion, Flexi-Guide Models FG300PE and FG300UR
C. Carsonite, "Super Duck" (Flat SDF-436, Round SDR-336)
D. Carsonite, "Super Duck II" Model SDCF203601MB "The Channelizer"
E. FlexStake, Surface Mount, Models 703 and 753 TM
F. GreenLine, Model SMD-36
G. Hi-Way Safety, Inc. "Channel Guide Channelizer" Model CGC36
H. Impact Recovery Model D36, with #101 Fixed (Surface-Mount) Base
I. Repo, Models 300 and 400
J. Safe-Hit, Guide Post, Model SH236SMA
K. Three D Traffic Works "Channelflex" ID No. 522053W

**Lane Separation System**

A. Bunzl "Flexi-Guide (FG) 300 Curb System"
B. Qwick Kurb, "Klemmfix Guide System"
C. Recycled Technology, Inc. "Safe-Lane System"

**CONICAL DELINEATORS, 1070 mm**
(For 700 mm Traffic Cones, see Standard Specifications)
A. Bent Manufacturing Company "T-Top"
B. Plastic Safety Systems "Navigator-42"
C. Radiator Specialty Company "Enforcer"
D. Roadmaker Company "Stacker"
E. TrafFix Devices "Grabber"
F. Three D Traffic Works "Ringtop" TD7000, ID No. 742143

**OBJECT MARKERS**
**Type "K", 450 mm**

A. Bunzl, Model FG318PE
B. Carsonite, Model SMD 615
C. FlexStake, Model 701 KM
D. Repo, Models 300 and 400
E. Safe-Hit, Model SH718SMA

**Type "K-4" / "Q" Object Markers, 600 mm**

A. Bent Manufacturing "Masterflex" Model MF-360-24
B. Bunzl Extrusion, Model FG324PE
C. Carsonite, Super Duck II
D. FlexStake, Model 701KM
E. Repo, Models 300 and 400
F. Safe-Hit, Models SH8 24SMA_WA and SH8 24GP3_WA
G. The Line Connection, Model DP21-4Q
H. Three D Traffic Works "Q" Marker, ID No. 531702W

**CONCRETE BARRIER MARKERS AND**
**TEMPORARY RAILING (TYPE K) REFLECTORS**
**Impactable Type**

A. ARTUK, "FB"
B. Bunzl Extrusion, Models PCBM-12 and PCBM-T12
C. Duraflex Corp., "Flexx 2020" and "Electriflexx"
D. Hi-Way Safety, Inc., Model GMKRM100
E. Plastic Safety Systems "BAM" Models OM-BARR and OM-BWAR
F. Sun-Lab Technology, "Safety Guide Light Model TM-5"
G. Three D Traffic Works "Roadguide" 9304 Series, ID No. 903176 (One-Way), ID No. 903215 (Two-Way)

**Non-Impactable Type**

A. ARTUK, JD Series
B. Plastic Safety Systems "BAM" Models OM-BITARW and OM-BITARA
C. Vega Molded Products, Models GBM and JD

**METAL BEAM GUARD RAIL POST MARKERS**
(For use to the left of traffic)
A. Bunzl Extrusion, "Mini" (75 mm x 254 mm)
B. Creative Building Products, "Dura-Bull, Model 11201"
C. Duraflex Corp., "Railrider"

**CONCRETE BARRIER DELINEATORS, 400 mm**
(For use to the right of traffic)
A. Bunzl Extrusion, Model PCBM T-16
B. Safe-Hit, Model SH216RBM
C. Sun-Lab Technology, "Safety Guide Light, Model TM16," (75 mm x 300 mm)
D. Three D Traffic Works "Roadguide" ID No. 904364 (White), ID No. 904390 (Yellow)

**CONCRETE BARRIER-MOUNTED MINI-DRUM (260 mm x 360 mm x 570 mm)**
A. Stinson Equipment Company "SaddleMarker"

**SOUND WALL DELINEATOR**
(Applied vertically. Place top of 75 mm x 300 mm reflective element at 1200 mm above roadway)
A. Bunzl Extrusion, PCBM S-36
B. Sun-Lab Technology, "Safety Guide Light, Model SM12," (75 mm x 300 mm)

**GUARD RAILING DELINEATOR**
(Place top of reflective element at 1200 mm above plane of roadway)

**Wood Post Type, 686 mm**

A. Bunzl Extrusion, FG 427 and FG 527
B. Carsonite, Model 427
C. FlexStake, Model 102 GR
D. GreenLine GRD 27
E. Safe-Hit, Model SH227GRD
F. Three D Traffic Works "Guardflex" TD9100 Series, ID No. 510476

**Steel Post Type**

A. Carsonite, Model CFGR-327 with CFGRBK300 Mounting Bracket

**RETROREFLECTIVE SHEETING**

**Channelizers, Barrier Markers, and Delineators**

A. Avery Dennison T-6500 Series (For rigid substrate devices only)
B. Avery Dennison WR-6100 Series
C. Nippon Carbide Industries, Flexible Ultralite Grade (ULG) II
D. Reflexite, PC-1000 Metalized Polycarbonate
E. Reflexite, AC-1000 Acrylic
F. Reflexite, AP-1000 Metalized Polyester
G. Reflexite, Conformalight, AR-1000 Abrasion Resistant Coating
H. 3M, High Intensity

**Traffic Cones, 330 mm Sleeves**

A. Reflexite SB (Polyester), Vinyl or "TR" (Semi-transparent)

**Traffic Cones, 100 mm and 150 mm Sleeves**

A. Nippon Carbide Industries, Flexible Ultralite Grade (ULG) II
B. Reflexite, Vinyl, "TR" (Semi-transparent) or "Conformalight"
C. 3M Series 3840

**Barrels and Drums**

A. Avery Dennison WR-6100
B. Nippon Carbide Industries, Flexible Ultralite Grade (ULG) II
C. Reflexite, "Conformalight", "Super High Intensity" or "High Impact Drum Sheeting"
D. 3M Series 3810

**Barricades: Type I, Medium-Intensity (Typically Enclosed Lens, Glass-Bead Element)**

A. American Decal, Adcolite
B. Avery Dennison, T-1500 and T-1600 series
C. 3M Engineer Grade, Series 3170

**Barricades: Type II, Medium-High-Intensity (Typically Enclosed Lens, Glass-Bead Element)**

A. Avery Dennison, T-2500 Series
B. Kiwalite Type II
C. Nikkalite 1800 Series

**Signs: Type II, Medium-High-Intensity (Typically Enclosed Lens, Glass-Bead Element)**

A. Avery Dennison, T-2500 Series
B. Kiwalite, Type II
C. Nikkalite 1800 Series

**Signs: Type III, High-Intensity (Typically Encapsulated Glass-Bead Element)**

A. Avery Dennison, T-5500 and T-5500A Series
B. Nippon Carbide Industries, Nikkalite Brand Ultralite Grade II
C. 3M Series 3870

**Signs: Type IV, High-Intensity (Typically Unmetallized Microprismatic Element)**

A. Avery Dennison, T-6500 Series
B. Nippon Carbide Industries, Crystal Grade, 94000 Series
C. Nippon Carbide Industries, Model No. 94847 Fluorescent Orange
D. Nippon Carbide Industries, Model No. 94844 Fluorescent Yellow Green

**Signs: Type VI, Elastomeric (Roll-Up) High-Intensity, without Adhesive**

A. Avery Dennison, WU-6014
B. Novabrite LLC, "Econobrite"
C. Reflexite "Vinyl"
D. Reflexite "SuperBright"
E. Reflexite "Marathon"
F. 3M Series RS34 Orange and RS20 Fluorescent Orange

**Signs: Type VII, Super-High-Intensity (Typically Unmetallized Microprismatic Element)**

A. 3M LDP Series 3924 Fluorescent Orange
B. 3M LDP Series 3970

**Signs: Type VIII, Super-High-Intensity (Typically Unmetallized Microprismatic Element)**

A. Avery Dennison, T-7500 Series
B. Avery Dennison, T-7511 Fluorescent Yellow
C. Avery Dennison, T-7513 Fluorescent Yellow Green
D. Avery Dennison, W-7514 Fluorescent Orange
E. Nippon Carbide Industries, Nikkalite Crystal Grade Model 92802 White
F. Nippon Carbide Industries, Nikkalite Crystal Grade Model 92844 Fluorescent Yellow/Green
G. Nippon Carbide Industries, Nikkalite Crystal Grade Model 92847 Fluorescent Orange

**Signs: Type IX, Very-High-Intensity (Typically Unmetallized Microprismatic Element)**

A. 3M VIP Series 3981 Diamond Grade Fluorescent Yellow
B. 3M VIP Series 3983 Diamond Grade Fluorescent Yellow/Green
C. 3M VIP Series 3990 Diamond Grade

**SPECIALTY SIGNS**

A. Hallmark Technologies, Inc., All Sign STOP Sign (All Plastic), 750 mm
B. Reflexite "Endurance" Work Zone Sign (with Semi-Rigid Plastic Substrate)

**SIGN SUBSTRATE**

**Fiberglass Reinforced Plastic (FRP)**

A. Fiber-Brite
B. Sequentia, "Polyplate"
C. Inteplast Group "InteCel" (13 mm for Post-Mounted CZ Signs, 1200 mm or less)

**Aluminum Composite**

A. Alcan Composites "Dibond Material, 2 mm" (for temporary construction signs only)
B. Mitsubishi Chemical America, Alpolic 350 (for temporary construction signs only)

**8-1.03 STATE-FURNISHED MATERIALS**

Attention is directed to Section 6-1.02, "State-Furnished Materials," of the Standard Specifications and these special provisions.

The following materials will be furnished to the Contractor:

A. Sign panels for roadside signs and overhead sign structures.
B. Sign overlay panels for roadside signs and overhead sign structures.
C. Hardware for mounting sign panels as follows:

    1. Blind rivets for mounting overlapping legend at sign panel joints.
    2. Closure inserts.
    3. Aluminum bolts and nuts and steel beveled washers for mounting laminated sign panels on overhead sign structures.
    4. Aluminum bolts, nuts, and washers for mounting overhead formed panels.

E. Padlocks for backflow preventer assembly enclosures, backflow preventer assembly blankets, walk gates, and irrigation controller enclosure cabinets.
F. Disks for survey monuments.
G. Marker panels, including reflectors, for Type N, Type P, and Type R object markers.
H. Type 334 traffic monitoring station cabinet and inductive loop detector sensor units.

Sign panels and overlay panels will be furnished to the Contractor at the District Warehouse located at 174 Cluster Street, San Bernardino, CA.

The Contractor shall notify the District Warehouse Manager, Telephone 909-383-4630 and the Engineer not less than 48 hours before State-furnished material is to be picked up by the Contractor. A full description of the material and the time the material will be picked up shall be provided. The number, type, and size of the sign panels, and the contract number shall also be provided to the District Warehouse Manager.

**8-1.04 SLAG AGGREGATE**

Air-cooled iron blast furnace slag shall not be used to produce aggregate for:

A. Structure backfill material.
B. Pervious backfill material.
C. Permeable material.
D. Reinforced or prestressed portland cement concrete component or structure.

Aggregate produced from slag resulting from a steel-making process shall not be used for a highway construction project except for the following items:

A. Asphalt Concrete.

A supplier of steel slag aggregate shall provide separate stockpiles for controlled aging of the slag. An individual stockpile shall contain not less than 9075 tonnes nor more than 45 350 tonnes of slag. The material in each individual stockpile shall be assigned a unique lot number and each stockpile shall be identified with a permanent system of signs. The supplier shall maintain a permanent record of the dates on which stockpiles are completed and controlled aging begun, of the dates when controlled aging was completed, and of the dates tests were made and the results of these tests. Moisture tests shall be made at least once each week. No credit for aging will be given for the time period covered by tests which show a

moisture content of 6 percent or less. The stockpiles and records shall be available to the Engineer during normal working hours for inspection, check testing and review.

The supplier shall notify the Transportation Laboratory, 5900 Folsom Boulevard, Sacramento, California 95819, when each stockpile is completed and controlled aging begun. No more aggregate shall be added to the stockpile unless a new aging period is initiated. A further notification shall be sent when controlled aging is completed.

The supplier shall provide a Certificate of Compliance in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications. Each stockpile or portion of a stockpile that is used in the work will be considered a lot. The Certificates of Compliance shall state that the steel slag aggregate has been aged in a stockpile for at least 3 months at a moisture content in excess of 6 percent of the dry mass of the aggregate.

Air-cooled iron blast furnace slag or natural aggregate may be blended in proper combinations with steel slag aggregate to produce the specified gradings, for those items for which steel slag aggregate is permitted, unless otherwise provided.

Aggregate containing slag shall meet the applicable quality requirements for the items in which the aggregate is used.

The combined slag aggregate shall conform to the specified grading for the item in which it is used. The grading will be determined by California Test 202, modified by California Test 105 when there is a difference in specific gravity of 0.2 or more between the coarse and fine portion of the aggregate or between blends of different aggregates.

No aggregate produced from slag shall be placed within 0.3-m, measured in any direction, of a non-cathodically protected pipe or structure unless the aggregate is incorporated in portland cement concrete pavement, in asphalt concrete, or in treated base.

When slag is used as aggregate in asphalt concrete, the $K_c$ factor requirements, as determined by California Test 303, will not apply.

If steel slag aggregates are used to make asphalt concrete, there shall be no other aggregates used in the mixture, except that up to 50 percent of the material passing the 4.75-mm sieve may consist of iron blast furnace slag aggregates or natural aggregates, or a combination thereof. If iron blast furnace aggregates or natural aggregates or a combination thereof are used in the mix, each type of aggregate shall be fed to the drier at a uniform rate. The rate of feed of each type of aggregate shall be maintained within 10 percent of the amount set. Adequate means shall be provided for controlling and checking the accuracy of the feeder.

In addition to the requirements of Section 39-3.01, "Storage," of the Standard Specifications, steel slag aggregate shall be stored separately from iron blast furnace slag aggregate and each type of slag aggregate shall also be stored separately from natural aggregate.

Asphalt concrete produced from more than one of the following shall not be placed in the same layer: steel slag aggregates, iron blast furnace slag aggregates, natural aggregates or any combination thereof. Once a type of aggregate or aggregates is selected, it shall not be changed without prior approval by the Engineer.

If steel slag aggregates are used to produce asphalt concrete, and if the specific gravity of a compacted stabilometer test specimen is in excess of 2.40, the quantity of asphalt concrete to be paid for will be reduced. The stabilometer test specimen will be fabricated in conformance with the procedures in California Test 304 and the specific gravity of the specimen will be determined in conformance with Method C of California Test 308. The pay quantity of asphalt concrete will be determined by multiplying the quantity of asphalt concrete placed in the work by 2.40 and dividing the result by the specific gravity of the compacted stabilometer test specimen. Such reduction in quantity will be determined and applied as often as is necessary to ensure accurate results as determined by the Engineer.

### 8-1.05 ENGINEERING FABRICS

Engineering fabrics shall conform to the provisions in Section 88, "Engineering Fabrics," of the Standard Specifications and these special provisions.

Filter fabric for this project shall be ultraviolet (UV) ray protected.

## SECTION 8-2. CONCRETE

### 8-2.01 PORTLAND CEMENT CONCRETE

Portland cement concrete shall conform to the provisions in Section 90, "Portland Cement Concrete," of the Standard Specifications and these special provisions.

References to Section 90-2.01, "Portland Cement," of the Standard Specifications shall mean Section 90-2.01, "Cement," of the Standard Specifications.

Mineral admixture shall be combined with cement in conformance with the provisions in Section 90-4.08, "Required Use of Mineral Admixtures," of the Standard Specifications for the concrete materials specified in Section 56-2, "Roadside Signs," of the Standard Specifications.

The requirements of Section 90-4.08, "Required Use of Mineral Admixture," of the Standard Specifications shall not apply to Section 19-3.025C, "Soil Cement Bedding," of the Standard Specifications.

The Department maintains a list of sources of fine and coarse aggregate that have been approved for use with a reduced amount of mineral admixture in the total amount of cementitious material to be used. A source of aggregate will be considered for addition to the approved list if the producer of the aggregate submits to the Transportation Laboratory certified test results from a qualified testing laboratory that verify the aggregate complies with the requirements. Prior to starting the testing, the aggregate test shall be registered with the Department. A registration number can be obtained by calling (916) 227-7228. The registration number shall be used as the identification for the aggregate sample in correspondence with the Department. Upon request, a split of the tested sample shall be provided to the Department. Approval of aggregate will depend upon compliance with the specifications, based on the certified test results submitted, together with any replicate testing the Department may elect to perform. Approval will expire 3 years from the date the most recent registered and evaluated sample was collected from the aggregate source.

Qualified testing laboratories shall conform to the following requirements:

A. Laboratories performing ASTM Designation: C 1293 shall participate in the Cement and Concrete Reference Laboratory (CCRL) Concrete Proficiency Sample Program and shall have received a score of 3 or better on all tests of the previous 2 sets of concrete samples.
B. Laboratories performing ASTM Designation: C 1260 shall participate in the Cement and Concrete Reference Laboratory (CCRL) Pozzolan Proficiency Sample Program and shall have received a score of 3 or better on the shrinkage and soundness tests of the previous 2 sets of pozzolan samples.

Aggregates on the list shall conform to one of the following requirements:

A. When the aggregate is tested in conformance with the requirements in California Test 554 and ASTM Designation: C 1293, the average expansion at one year shall be less than or equal to 0.040 percent; or
B. When the aggregate is tested in conformance with the requirements in California Test 554 and ASTM Designation: C 1260, the average of the expansion at 16 days shall be less than or equal to 0.15 percent.

The amounts of cement and mineral admixture used in cementitious material shall be sufficient to satisfy the minimum cementitious material content requirements specified in Section 90-1.01, "Description," or Section 90-4.05, "Optional Use of Chemical Admixtures," of the Standard Specifications and shall conform to the following:

A. The minimum amount of cement shall not be less than 75 percent by mass of the specified minimum cementitious material content.
B. The minimum amount of mineral admixture to be combined with cement shall be determined using one of the following criteria:

    1. When the calcium oxide content of a mineral admixture is equal to or less than 2 percent by mass, the amount of mineral admixture shall not be less than 15 percent by mass of the total amount of cementitious material to be used in the mix.
    2. When the calcium oxide content of a mineral admixture is greater than 2 percent by mass, and any of the aggregates used are not listed on the approved list as specified in these special provisions, then the amount of mineral admixture shall not be less than 25 percent by mass of the total amount of cementitious material to be used in the mix.
    3. When the calcium oxide content of a mineral admixture is greater than 2 percent by mass and the fine and coarse aggregates are listed on the approved list as specified in these special provisions, then the amount of mineral admixture shall not be less than 15 percent by mass of the total amount of cementitious material to be used in the mix.
    4. When a mineral admixture that conforms to the provisions for silica fume in Section 90-2.04, "Admixture Materials," of the Standard Specifications is used, the amount of mineral admixture shall not be less than 10 percent by mass of the total amount of cementitious material to be used in the mix.
    5. When a mineral admixture that conforms to the provisions for silica fume in Section 90-2.04, "Admixture Materials," of the Standard Specifications is used and the fine and coarse aggregates are listed on the approved list as specified in these special provisions, then the amount of mineral admixture shall not be less than 7 percent by mass of the total amount of cementitious material to be used in the mix.

C. The total amount of mineral admixture shall not exceed 35 percent by mass of the total amount of cementitious material to be used in the mix. Where Section 90-1.01, "Description," of the Standard Specifications specifies a maximum cementitious content in kilograms per cubic meter, the total mass of cement and mineral admixture per cubic meter shall not exceed the specified maximum cementitious material content.

## 8-2.02 PRECAST CONCRETE QUALITY CONTROL

### GENERAL

Precast concrete quality control shall conform to these special provisions.

Unless otherwise specified, precast concrete quality control shall apply when any precast concrete members are fabricated in conformance with the provisions in Section 49, "Piling," or Section 51, "Concrete Structures," of the Standard Specifications.

Quality Control (QC) shall be the responsibility of the Contractor. The Contractor's QC inspectors shall perform inspection and testing prior to precasting, during precasting, and after precasting, and as specified in this section and additionally as necessary to ensure that materials and workmanship conform to the details shown on the plans and specifications.

Quality Assurance (QA) is the prerogative of the Engineer. Regardless of the acceptance for a given precast element by the Contractor, the Engineer will evaluate the precast element. The Engineer will reject any precast element that does not conform to the approved Precast Concrete Quality Control Plan (PCQCP), the details shown on the plans, and these special provisions.

The Contractor shall designate in writing a precast Quality Control Manager (QCM) for each precasting facility. The QCM shall be responsible directly to the Contractor for the quality of precasting, including materials and workmanship, performed by the Contractor and all subcontractors. The QCM shall be the sole individual responsible to the Contractor for submitting, receiving, and approving all correspondence, required submittals, and reports to and from the Engineer. The QCM shall not be employed or compensated by any subcontractor, or other persons or entities hired by subcontractors, or suppliers, who will provide other services or materials for the project. The QCM may be an employee of the Contractor.

Prior to submitting the PCQCP required herein, a meeting between the Engineer, the Contractor's QCM, and a representative from each entity performing precast concrete operations for this project, shall be held to discuss the requirements for precast quality control.

QC Inspectors shall either be 1) licensed as Civil Engineers in the State of California, or 2) have a current Plant Quality Personnel Certification, Level II, from the Precast/Prestressed Concrete Institute. A QC Inspector shall witness all precast concrete operations.

### PRECAST CONCRETE QUALIFICATION AUDIT

Unless otherwise specified, no Contractors or subcontractors performing precast concrete operations for the project shall commence work without having successfully completed the Department's Precast Fabrication Qualification Audit, hereinafter referred to as the audit. The Engineer will perform the audit, and copies of the audit form, along with procedures for requesting and completing the audit, are available at the Transportation Laboratory or the following website:

http://www.dot.ca.gov/hq/esc/Translab/smbresources.htm

An audit that was previously approved by the Engineer no more than three years prior to the beginning of work on this contract will be acceptable for the entire period of this contract, provided the Engineer determines the audit is for the same type of work that is to be performed on this contract.

Successful completion of an audit shall not relieve the Contractor of the responsibility for furnishing materials or producing finished work of the quality specified in these special provisions and as shown on the plans.

### PRECAST CONCRETE QUALITY CONTROL PLAN

Prior to performing any precasting operations, the Contractor shall submit to the Engineer, in conformance with the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications, 3 copies of a separate PCQCP for each item of work which is to be precast. A separate PCQCP shall be submitted for each facility. As a minimum, each PCQCP shall include the following:

A. The name of the precasting firm, the concrete plants to be used, and any concrete testing firm to be used;
B. A manual prepared by the precasting firm that includes equipment, testing procedures, safety plan, and the names, qualifications, and documentation of certifications for all personnel to be used;
C. The name of the QCM and the names, qualifications, and documentation of certifications for all QC inspection personnel to be used;
D. An organizational chart showing all QC personnel and their assigned QC responsibilities;
E. The methods and frequencies for performing all required quality control procedures, including all inspections, material testing, and any required survey procedures for all components of the precast elements including prestressing systems, concrete, grout, reinforcement, steel components embedded or attached to the precast member, miscellaneous metal, and formwork;

F. A system for identification and tracking of required precast element repairs, and a procedure for the re-inspection of any repaired precast element. The system shall have provisions for a method of reporting nonconforming precast elements to the Engineer; and
G. Forms to be used for Certificates of Compliance, daily production logs, and daily reports.

The Engineer shall have 4 weeks to review the PCQCP submittal after a complete plan has been received. No precasting shall be performed until the PCQCP is approved in writing by the Engineer.

A PCQCP that was previously approved by the Engineer no more than one year prior to the beginning of work on this contract will be acceptable for the entire period of this contract, provided the Engineer determines the PCQCP is for the same type of work that is to be performed on this contract.

An amended PCQCP or addendum shall be submitted to, and approved in writing by the Engineer, for any proposed revisions to the approved PCQCP. An amended PCQCP or addendum will be required for any revisions to the PCQCP, including but not limited to changes in concrete plants or source materials, changes in material testing procedures and testing labs, changes in procedures and equipment, changes in QC personnel, or updated systems for tracking and identifying precast elements. The Engineer shall have 2 weeks to complete the review of the amended PCQCP or addendum, once a complete submittal has been received. Work that is affected by any of the proposed revisions shall not be performed until the amended PCQCP or addendum has been approved.

After final approval of the PCQCP, amended PCQCP, or addendum, the Contractor shall submit 7 copies to the Engineer of each of these approved documents.

It is expressly understood that the Engineer's approval of the Contractor's PCQCP shall not relieve the Contractor of any responsibility under the contract for the successful completion of the work in conformance with the requirements of the plans and specifications. The Engineer's approval shall neither constitute a waiver of any of the requirements of the plans and specifications nor relieve the Contractor of any obligation thereunder, and defective work, materials, and equipment may be rejected notwithstanding approval of the PCQCP.

**REPORTING**

The QC Inspector shall provide reports to the QCM on a daily basis for each day that precasting operations are performed.

A daily production log for precasting shall be kept by the QCM for each day that precasting operations, including setting forms, placing reinforcement, setting prestressing steel, casting, curing, post tensioning, and form release, are performed. The log shall include the facility location, and shall include specific description of casting or related operations, any problems or deficiencies discovered, any testing or repair work performed, and the names of all QC personnel and the specific QC inspections they performed that day. The daily report from each QC Inspector shall also be included in the log. This daily log shall be available for viewing by the Engineer, at the precasting facility.

All reports regarding material tests and any required survey checks shall be signed by the person that performed the test or check, and then submitted directly to the QCM for review and signature prior to submittal to the Engineer. Corresponding names shall be clearly printed or typewritten next to all signatures.

The Engineer shall be notified immediately in writing when any precasting problems or deficiencies are discovered and also of the proposed repair or process changes required to correct them. The Engineer shall have 4 weeks to review these procedures. No remedial work shall begin until the Engineer approves these procedures in writing.

The following items shall be included in a Precast Report that is to be submitted to the Engineer following the completion of any precast element:

A. Reports of all material tests and any required survey checks;
B. Documentation that the Contractor has evaluated all tests and corrected all rejected deficiencies, and all repairs have been re-examined with the required tests and found acceptable; and
C. Daily production log.

At the completion of any precast element, and if the QCM determines that element is in conformance with these special provisions, the QCM shall sign and furnish to the Engineer, a certificate of compliance in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications. This certificate of compliance shall be submitted with the Precast Report. The certificate shall state that all of the materials and workmanship incorporated in the work, and all required tests and inspections of this work, have been performed in conformance with the details shown on the plans and the provisions of the Standard Specifications and these special provisions.

**PAYMENT**

In the event the Engineer fails to complete the review of 1) a PCQCP, 2) an amended PCQCP or addendum, or 3) a proposed repair or process change, within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

All required repair work or process changes required to correct precasting operation deficiencies, whether discovered by the QCM, QC Inspector, or by the Engineer, and any associated delays or expenses to the Contractor caused by performing these repairs, shall be at the Contractor's expense.

Full compensation for conforming to the requirements of this section shall be considered as included in the contract prices paid for the various items of work involved, and no additional compensation will be allowed therefor.

## SECTION 8-3. WELDING

### 8-3.01 WELDING

**GENERAL**

Flux core welding electrodes conforming to the requirements of AWS A5.20 E6XT-4 or E7XT-4 shall not be used to perform welding for this project.

Wherever reference is made to the following AWS welding codes in the Standard Specifications, on the plans, or in these special provisions, the year of adoption for these codes shall be as listed:

| AWS Code | Year of Adoption |
|---|---|
| D1.1 | 2002 |
| D1.4 | 1998 |
| D1.5 | 2002 |
| D1.6 | 1999 |

Requirements of the AWS welding codes shall apply unless specified otherwise in the Standard Specifications, on the plans, or in these special provisions. Wherever the abbreviation AWS is used, it shall be equivalent to the abbreviations ANSI/AWS or AASHTO/AWS.

Section 6.1.1.1 of AWS D1.5 is replaced with the following:

Quality Control (QC) shall be the responsibility of the Contractor. As a minimum, the Contractor shall perform inspection and testing of each weld joint prior to welding, during welding, and after welding as specified in this section and as necessary to ensure that materials and workmanship conform to the requirements of the contract documents.

Sections 6.1.3 through 6.1.4.3 of AWS D1.1, Section 7.1.2 of AWS D1.4, and Sections 6.1.1.2 through 6.1.3.3 of AWS D1.5 are replaced with the following:

The QC Inspector shall be the duly designated person who acts for and on behalf of the Contractor for inspection, testing, and quality related matters for all welding.

Quality Assurance (QA) is the prerogative of the Engineer. The QA Inspector is the duly designated person who acts for and on behalf of the Engineer.

The QC Inspector shall be responsible for quality control acceptance or rejection of materials and workmanship, and shall be currently certified as an AWS Certified Welding Inspector (CWI) in conformance with the requirements in AWS QC1, " Standard for AWS Certification of Welding Inspectors."

The QC Inspector may be assisted by an Assistant QC Inspector provided that this individual is currently certified as an AWS Certified Associate Welding Inspector (CAWI) in conformance with the requirements in AWS QC1, "Standard for AWS Certification of Welding Inspectors." The Assistant QC Inspector may perform inspection under the direct supervision of the QC Inspector provided the Assistant is always within visible and audible range of the QC Inspector. The QC Inspector shall be responsible for signing all reports and for determining if welded materials conform to workmanship and acceptance criteria. The ratio of QC Assistants to QC Inspectors shall not exceed 5 to 1.

When the term "Inspector" is used without further qualification, it shall refer to the QC Inspector.

Section 6.14.6, "Personnel Qualification," of AWS D1.1, Section 7.8, "Personnel Qualification," of AWS D1.4, and Section 6.1.3.4, "Personnel Qualification," of AWS D1.5 are replaced with the following:

Personnel performing nondestructive testing (NDT) shall be qualified and certified in conformance with the requirements of the American Society for Nondestructive Testing (ASNT) Recommended Practice No. SNT-TC-1A and the Written Practice of the NDT firm. The Written Practice of the NDT firm shall meet or exceed the guidelines of the ASNT Recommended Practice No. SNT-TC-1A. Individuals who perform NDT, review the results, and prepare the written reports shall be either:

A. Certified NDT Level II technicians, or;
B. Level III technicians who hold a current ASNT Level III certificate in that discipline and are authorized and certified to perform the work of Level II technicians.

Section 6.5.4 of AWS D1.5 is replaced with the following:

The QC Inspector shall inspect and approve each joint preparation, assembly practice, welding technique, joint fit-up, and the performance of each welder, welding operator, and tack welder to make certain that the applicable requirements of this code and the approved Welding Procedure Specification (WPS) are met. The QC Inspector shall examine the work to make certain that it meets the requirements of Sections 3 and 6.26. The size and contour of all welds shall be measured using suitable gages. Visual inspection for cracks in welds and base metal, and for other discontinuities should be aided by strong light magnifiers, or such other devices as may be helpful. Acceptance criteria different from those specified in this code may be used when approved by the Engineer.

Section 6.6.5, "Nonspecified NDT Other than Visual," of AWS D1.1, Section 6.6.5 of AWS D1.4 and Section 6.6.5 of AWS D1.5 shall not apply.

For any welding, the Engineer may direct the Contractor to perform NDT that is in addition to the visual inspection or NDT specified in the AWS or other specified welding codes, in the Standard Specifications, or in these special provisions. Additional NDT required by the Engineer will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications. Should any welding deficiencies be discovered by this additional NDT, all costs associated with the repair of the deficient area, including NDT of the weld and of the weld repair, and any delays caused by the repair, shall be at the Contractor's expense.

Repair work to correct welding deficiencies discovered by visual inspection or NDT, or by additional NDT directed or performed by the Engineer, and any associated delays or expenses caused to the Contractor by performing these repairs, shall be at the Contractor's expense.

The Engineer shall have the authority to verify the qualifications or certifications of any welder, QC Inspector, or NDT personnel to specified levels by retests or other means approved by the Engineer.

Continuous inspection shall be provided when any welding is being performed. Continuous inspection, as a minimum, shall include having a QC Inspector within such close proximity of all welders or welding operators so that inspections by the QC Inspector of each welding operation at each welding location shall not lapse for a period exceeding 30 minutes.

Inspection and approval of all joint preparations, assembly practices, joint fit-ups, welding techniques, and the performance of each welder, welding operator, and tack welder shall be documented by the QC Inspector on a daily basis for each day welding is performed. For each inspection, including fit-up, Welding Procedure Specification (WPS) verification, and final weld inspection, the QC Inspector shall confirm and document compliance with the requirements of the AWS or other specified code criteria and the requirements of these special provisions on all welded joints before welding, during welding, and after the completion of each weld.

When joint weld details that are not prequalified to the details of Section 3 of AWS D1.1 or to the details of Figure 2.4 or 2.5 of AWS D1.5 are proposed for use in the work, the joint details, their intended locations, and the proposed welding parameters and essential variables, will be approved by the Engineer. The Engineer shall have 2 weeks to complete the review of the proposed joint detail locations. In the event the Engineer fails to complete the review within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays," of the Standard Specifications. Upon approval of the proposed joint detail locations and qualification of the proposed joint details, welders and welding operators using these details shall perform a qualification test plate using the WPS variables and the joint detail to be used in production. The test plate shall have the maximum thickness to be used in production and a minimum length of 180 mm and minimum finish welded width 460 mm. The test plate shall be mechanically and radiographically tested. Mechanical and radiographic testing and acceptance criteria shall be as specified in the applicable AWS codes.

In addition to the requirements specified in the applicable code, the period of effectiveness for a welder's or welding operator's qualification shall be a maximum of 3 years for the same weld process, welding position, and weld type. If production welding will be performed without gas shielding, then qualification shall also be without gas shielding. Excluding welding of fracture critical members, a valid qualification at the beginning of work on a contract will be acceptable for the entire period of the contract, as long as the welder's or welding operator's work remains satisfactory.

The Engineer will witness all qualification tests for WPSs that were not previously approved by the Department. An approved independent third party will witness the qualification tests for welders or welding operators. The independent third party shall be a current CWI and shall not be employed by the contractor performing the welding. The Engineer shall have 2 weeks to review the qualifications and copy of the current certification of the independent third party. In the event the Engineer fails to complete the review within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays," of the Standard Specifications. The Contractor shall notify the Engineer one week prior to performing any qualification tests. Witnessing of qualification tests by the Engineer shall not constitute approval of the intended joint locations, welding parameters, or essential variables.

In addition to the requirements of AWS D1.5 Section 5.12 or 5.13, welding procedures qualification, for work welded in conformance with that code, shall conform to the following requirements:

A. Unless considered prequalified, fillet welds, including reinforcing fillet welds, shall be qualified in each position. The fillet weld soundness test shall be conducted using the essential variables of the WPS as established by the Procedure Qualification Record (PQR.)
B. For qualification of joints that do not conform to Figures 2.4 and 2.5 of AWS D1.5, two WPS qualification tests are required. The tests conforming to AWS D1.5 Section 5.13 shall be conducted using both Figure 5.1 and Figure 5.3. The test conforming to Figure 5.3 shall be conducted using the same welding electrical parameters that were established for the test conducted conforming to Figure 5.1.
C. The travel speed, current, and voltage values that are used for tests conducted per AWS D1.5 Section 5.12 or 5.13 shall be consistent for each weld joint, and shall in no case vary by more than 10 percent for travel speed, 10 percent for current, and 7 percent for voltage.
D. For a WPS qualified in conformance with AWS D1.5 Section 5.13, the values to be used for calculating ranges for current and voltage shall be based on the average of all weld passes made in the test. Heat input shall be calculated using the average of current and voltage of all weld passes made in the test for a WPS qualified in conformance with Section 5.12 or 5.13.
E. To qualify for unlimited material thickness, two qualification tests are required for WPSs utilized for welding material thicknesses greater than 38 mm. One test shall be conducted using 20-mm thick test plates, and one test shall be conducted using test plates with a thickness between 38 mm and 50 mm. Two maximum heat input tests may be conducted for unlimited thickness qualification.
F. Macroetch tests are required for WPS qualification tests, and acceptance shall be per AWS D1.5 Section 5.19.3.
G. When a weld joint is to be made using a combination of qualified WPSs, each process shall be qualified separately.
H. When a weld joint is to be made using a combination of qualified and prequalified processes, the WPS shall reflect both processes and the limitations of essential variables, including weld bead placement, for both processes.
I. Prior to preparing mechanical test specimens, the PQR welds shall be inspected by visual and radiographic tests. Backing bar shall be 75 mm in width and shall remain in place during NDT testing. Results of the visual and radiographic tests shall comply with AWS D1.5 Section 6.26.2, excluding Section 6.26.2.2. Test plates that do not comply with both tests shall not be used.

**WELDING QUALITY CONTROL**

Welding quality control shall conform to the requirements in the AWS or other specified welding codes, the Standard Specifications, and these special provisions.

Unless otherwise specified, welding quality control shall apply when any work is welded in conformance with the provisions in Section 49, "Piling," Section 52, "Reinforcement," Section 55, "Steel Structures," or Section 75-1.035, "Bridge Joint Restrainer Units," of the Standard Specifications.

The welding of fracture critical members (FCMs) shall conform to the provisions specified in the Fracture Control Plan (FCP) and herein.

The Contractor shall designate in writing a welding Quality Control Manager (QCM). The QCM shall be responsible directly to the Contractor for the quality of welding, including materials and workmanship, performed by the Contractor and subcontractors.

The QCM shall be the sole individual responsible to the Contractor for submitting, receiving, reviewing, and approving all correspondence, required submittals, and reports to and from the Engineer. The QCM shall be a registered professional engineer or shall be currently certified as a CWI or a CAWI.

The QCM shall not be employed or compensated by any subcontractor, or by other persons or entities hired by subcontractors, who will provide other services or materials for the project. The QCM may be an employee of the Contractor.

Welding inspection personnel or NDT firms to be used in the work shall not be employed or compensated by any subcontractor, or by other persons or entities hired by subcontractors, who will provide other services or materials for the project, except for the following conditions:

A. The work is welded in conformance with AWS D1.5 and is performed at a permanent fabrication or manufacturing facility which is certified under the AISC Quality Certification Program, Category Cbr, Major Steel Bridges and Fracture Critical endorsement F.
B. The welding is performed on pipe pile material at a permanent pipe manufacturing facility authorized to apply the American Petroleum Institute (API) monogram for API 5L pipe.

For welding performed at such facilities, the inspection personnel or NDT firms may be employed or compensated by the facility performing the welding.

Prior to submitting the Welding Quality Control Plan (WQCP) required herein, a pre-welding meeting between the Engineer, the Contractor's QCM, and a representative from each entity performing welding or inspection for this project, shall be held to discuss the requirements for the WQCP.

The Contractor shall submit to the Engineer, in conformance with the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications, 2 copies of a separate WQCP for each subcontractor or supplier for each item of work for which welding is to be performed.

The Contractor shall allow the Engineer 2 weeks to review the WQCP submittal after a complete plan has been received. No welding shall be performed until the WQCP is approved in writing by the Engineer. In the event the Engineer fails to complete the review within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

An amended WQCP or any addendum to the approved WQCP shall be submitted to, and approved in writing by the Engineer, for proposed revisions to the approved WQCP. An amended WQCP or addendum will be required for revisions to the WQCP, including but not limited to a revised WPS; additional welders; changes in NDT firms, QC, or NDT personnel or procedures; or updated systems for tracking and identifying welds. The Engineer shall have 1 week to complete the review of the amended WQCP or addendum. Work affected by the proposed revisions shall not be performed until the amended WQCP or addendum has been approved. In the event the Engineer fails to complete the review within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

Information regarding the contents, format, and organization of a WQCP, is available at the Transportation Laboratory or the following website:

http://www.dot.ca.gov/hq/esc/Translab/smbresources.htm

After final approval of the WQCP, amended WQCP, or addendum, the Contractor shall submit 7 copies to the Engineer of the approved documents. A copy of the Engineer approved document shall be available at each location where welding is to be performed

A daily production log for welding shall be kept for each day that welding is performed. The log shall clearly indicate the locations of all welding. The log shall include the welders' names, amount of welding performed, any problems or deficiencies discovered, and any testing or repair work performed, at each location. The daily report from each QC Inspector shall also be included in the log.

The following items shall be included in a Welding Report that is to be submitted to the Engineer within 10 days following the performance of any welding:

A. Reports of all visual weld inspections and NDT.
B. Radiographs and radiographic reports, and other required NDT reports.
C. Documentation that the Contractor has evaluated all radiographs and other nondestructive tests and corrected all rejectable deficiencies, and all repaired welds have been reexamined by the required NDT and found acceptable.
D. Daily production log.

The following information shall be clearly written on the outside of radiographic envelopes: name of the QCM, name of the nondestructive testing firm, name of the radiographer, date, contract number, complete part description, and all included weld numbers or a report number, as detailed in the WQCP. In addition, all innerleaves shall have clearly written on them the part description and all included weld numbers, as detailed in the WQCP.

Reports regarding NDT shall be signed by both the NDT technician and the person that performed the review, and then submitted directly to the QCM for review and signature prior to submittal to the Engineer. Corresponding names shall be clearly printed or typewritten next to all signatures.

The Engineer will review the Welding Report to determine if the Contractor is in conformance with the WQCP. Unless otherwise specified, the Engineer shall be allowed 10 days to review the report and respond in writing after a complete Welding Report has been received. Prior to receiving notification from the Engineer of the Contractor's conformance with the WQCP, the Contractor may encase in concrete or cover welds for which a Welding Report has been submitted. However, should the Contractor elect to encase or cover those welds prior to receiving notification from the Engineer, it is expressly understood that the Contractor shall not be relieved of the responsibility for incorporating material in the work that conforms to the requirements of the plans and specifications. Material not conforming to these requirements will be subject to rejection. Should the Contractor elect to wait to encase or cover welds pending notification by the Engineer, and in the event the Engineer fails to complete the review within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

The QC Inspector shall provide reports to the QCM on a daily basis for each day that welding is performed.

Except for noncritical weld repairs, the Engineer shall be notified immediately in writing when welding problems, deficiencies, base metal repairs, or any other type of repairs not submitted in the WQCP are discovered, and also of the proposed repair procedures to correct them. The Contractor shall allow the Engineer one week to review these procedures. No remedial work shall begin until the repair procedures are approved in writing by the Engineer. In the event the Engineer fails to complete the review within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

The QCM shall sign and furnish to the Engineer, a Certificate of Compliance in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications for each item of work for which welding was performed. The certificate shall state that all of the materials and workmanship incorporated in the work, and all required tests and inspections of this work, have been performed in conformance with the details shown on the plans, the Standard Specifications, and these special provisions.

## WELDING FOR OVERHEAD SIGN AND POLE STRUCTURES

The Contractor shall meet the following requirements for any work welded in conformance with the provisions in Section 56-1, "Overhead Sign Structures," or Section 86-2.04, "Standards, Steel Pedestals and Posts," of the Standard Specifications.

Welding inspection personnel or NDT firms to be used in the work shall not be employed or compensated by any subcontractor, or by other persons or entities hired by subcontractors, who will provide other services or materials for the project, except for when the welding is performed at a permanent fabrication or manufacturing facility which is certified under the AISC Quality Certification Program, Category Sbd, Conventional Steel Building Structures.

### Welding Qualification Audit

Contractors or subcontractors performing welding operations for overhead sign and pole structures shall not deliver materials to the project without having successfully completed the Department's "Manufacturing Qualification Audit for Overhead Sign and Pole Structures," hereinafter referred to as the audit, not more than one year prior to the delivery of the materials. The Engineer will perform the audit. Copies of the audit form, and procedures for requesting and completing the audit, are available at the Transportation Laboratory or the following website:

http://www.dot.ca.gov/hq/esc/Translab/smbresources.htm

An audit that was approved by the Engineer no more than one year prior to the beginning of work on this contract will be acceptable for the entire period of this contract, provided the Engineer determines the audit was for the same type of work that is to be performed on this contract.

Successful completion of an audit shall not relieve the Contractor of the responsibility for furnishing materials or producing finished work of the quality specified in these special provisions and as shown on the plans.

**Welding Report**

For work welded in conformance with the provisions in Section 56-1, "Overhead Sign Structures," or Section 86-2.04, "Standards, Steel Pedestals and Posts," of the Standard Specifications, a Welding Report shall be submitted in conformance with the provisions in "Welding Quality Control," of these special provisions.

**PAYMENT**

Full compensation for conforming to the requirements of "Welding" shall be considered as included in the contract prices paid for the various items of work involved and no additional compensation will be allowed therefor.

## SECTION 9. DESCRIPTION OF BRIDGE WORK

The bridge work to be done consists, in general, of modification of the following structures:

Wineville Road Undercrossing (Widen)
(Bridge No. 56-0601)

Widen the existing left and right bridges with a one-span cast-in-place prestressed concrete box girder bridge supported on existing footings.

Mira Loma Overhead (Widen)
(Bridge No. 56-0602)

Widen the existing left and right bridges with a three-span cast-in-place prestressed concrete box girder bridge supported on driven pile footings and existing footings.

Etiwanda Ave Undercrossing (Widen)
(Bridge No. 56-0603)

Widen the existing left and right bridges with a one-span cast-in-place prestressed concrete box girder bridge supported on existing footings.

San Sevaine Channel Bridge (Modify)
(Bridge No. 56-0645)

Replace existing barriers and joint seals, construct new medium barrier and approach slabs.

Sounwall SW #58
(Bridge No. 56-SW58)

Construct a masonry soundwall on barrier supported on soil anchors.

Campbell Street Undercrossing (Widen)
(Bridge No. 56-0526)

Widen the existing left and right bridges with a one-span cast-in-place prestressed concrete box girder bridge supported on spread footings.

Pyrite Street Undercrossing (Widen)
(Bridge No. 56-0528)

Widen the existing left and right bridges with a two-span cast-in-place prestressed concrete box girder bridge supported on cast-in-drilled-hole pile footings.

Camino Real Undercrossing (Widen)
(Bridge No. 56-0661)

Widen the existing left and right bridges with a one-span cast-in-place prestressed concrete box girder bridge supported on spread footings.

## SECTION 10. CONSTRUCTION DETAILS

## SECTION 10-1. GENERAL

### 10-1.00 CONSTRUCTION PROJECT INFORMATION SIGNS

Before any major physical construction work readily visible to highway users is started on this contract, the Contractor shall furnish and erect 10 Type 2 Construction Project Information signs at the locations designated by the Engineer.

The signs and overlays shall be of a type and material consistent with the estimated time of completion of the project and shall conform to the details shown on the plans.

The sign letters, border and the Department's construction logos shall conform to the colors (non-reflective) and details shown on the plans, and shall be on a white background (non-reflective). The colors blue and orange shall conform to PR Color Number 3 and Number 6, respectively, as specified in the Federal Highway Administration's Color Tolerance Chart.

The sign message to be used for fund types shall consist of the following, in the order shown:

| |
|---|
| STATE HIGHWAY FUNDS |
| RIVERSIDE COUNTY TRANSPORTATION FUNDS |

The sign message to be used for type of work shall consist of the following:

HIGHWAY CONSTRUCTION

HIGHWAY IMPROVEMENT
BRIDGE CONSTRUCTION

The sign message to be used for the Year of Completion of Project Construction will be furnished by the Engineer. The Contractor shall furnish and install the "Year" sign overlay within 10 working days of notification of the year date to be used.

The letter sizes to be used shall be as shown on the plans. The information shown on the signs shall be limited to that shown on the plans.

The signs shall be kept clean and in good repair by the Contractor.

Upon completion of the work, the signs shall be removed and disposed of outside the highway right of way in conformance with the provisions in Section 7-1.13 of the Standard Specifications.

Full compensation for furnishing, erecting, maintaining, and removing and disposing of the construction project information signs shall be considered as included in the contract lump sum price paid for construction area signs and no additional compensation will be allowed therefor.

**10-1.01 ORDER OF WORK**

Order of work shall conform to the provisions in Section 5-1.05, "Order of Work," of the Standard Specifications and these special provisions.

In these special provisions under "Concrete Pavement" attention is directed to the "Paving Conference" and "Test Strip".

Concrete pavement in existing lane number 1 shall be grounded as shown in plans prior to placement of temporary railing Type K.

Edge of shoulder soundwalls shall be constructed prior to paving of the outside shoulder.

Attention is directed to "Maintaining Traffic" and "Temporary Pavement Delineation" of these special provisions and to the stage construction sheets of the plans.

Attention is directed to "Progress Schedule (Critical Path Method)" of these special provisions regarding the submittal of a general time-scaled logic diagram within 10 days after approval of the contract. The diagram shall be submitted prior to performing any work that may be affected by any proposed deviations to the construction staging of the project.

The work shall be performed in conformance with the stages of construction shown on the plans. Nonconflicting work in subsequent stages may proceed concurrently with work in preceding stages, provided satisfactory progress is maintained in the preceding stages of construction.

In each stage, after completion of the preceding stage, the first order of work shall be the removal of existing pavement delineation as directed by the Engineer. Pavement delineation removal shall be coordinated with new delineation so that lane lines are provided at all times on traveled ways open to public traffic.

Before obliterating any pavement delineation (traffic stripes, pavement markings, and pavement markers) that is to be replaced on the same alignment and location, as determined by the Engineer, the pavement delineation shall be referenced by the Contractor, with a sufficient number of control points to reestablish the alignment and location of the new pavement delineation. The references shall include the limits or changes in striping pattern, including one- and 2-way barrier lines, limit lines, crosswalks and other pavement markings. Full compensation for referencing existing pavement delineation shall be considered as included in the contract prices paid for new pavement delineation and no additional compensation will be allowed therefor.

Prior to applying asphalt concrete or minor concrete (minor structure) the Contractor shall cover all manholes, valve and monument covers, grates, or other exposed facilities located within the area of application, using a plastic or oil resistant construction paper secured to the facility being covered by tape or adhesive. The covered facilities shall be referenced by the Contractor, with a sufficient number of control points to relocate the facilities after the asphalt concrete or minor concrete (minor structure) has been placed. After completion of the asphalt concrete or minor concrete (minor structure) operation, all covers shall be removed and disposed of in a manner satisfactory to the Engineer. Full compensation for covering manholes, valve and monument covers, grates, or other exposed facilities, referencing, and removing temporary cover shall be considered as included in the contract price paid per tonne or cubic meter for asphalt concrete or minor concrete (minor structure) and no additional compensation will be allowed therefor.

At those locations exposed to public traffic where guard railings or barriers are to be constructed, reconstructed, or removed and replaced, the Contractor shall schedule operations so that at the end of each working day there shall be no post holes open nor shall there be any railing or barrier posts installed without the blocks and rail elements assembled and mounted thereon.

Not less than 30 days prior to planting the plants, the Contractor shall furnish the Engineer a statement from the vendor that the order for the plants required for this contract, including inspection plants, has been received and accepted by the vendor. The statement from the vendor shall include the names, sizes, and quantities of plants ordered and the anticipated date of delivery.

The Contractor shall place orders for replacement plants with the vendor at the appropriate time so that the roots of the replacement plants are not in a root-bound condition.

Not less than 30 days prior to applying seeds, the Contractor shall furnish the Engineer a statement from the vendor that the order for the seed required for this contract has been received and accepted by the vendor. The statement from the vendor shall include the names and quantity of seed ordered and the anticipated date of delivery.

Attention is directed to "Maintain Existing Planted Areas" of these special provisions regarding checking for deficiencies of existing plants that are to remain in place, prior to the start of irrigation work.

Attention is directed to "Irrigation Systems Functional Test" of these special provisions, regarding restrictions for planting operations.

Attention is directed to Section 20-5.027B, "Wiring Plans and Diagrams," of the Standard Specifications regarding submittal of working drawings.

## 10-1.02 WATER POLLUTION CONTROL

Water pollution control work shall conform to the provisions in Section 7-1.01G, "Water Pollution," of the Standard Specifications and these special provisions.

This project lies within the boundaries of the Santa Ana Regional Water Quality Control Board (RWQCB).

The State Water Resources Control Board (SWRCB) has issued a permit to the Department which governs storm water and non-storm water discharges from its properties, facilities and activities. The Department's Permit is entitled: "Order No. 99-06-DWQ, NPDES No. CAS000003, National Pollutant Discharge Elimination System (NPDES) Permit, Storm Water Permit and Waste Discharge Requirements (WDRs) for the State of California, Department of Transportation Properties, Facilities, and Activities." Copies of the Department's Permit are available for review from the SWRCB, Storm Water Permit Unit, 1001 "I" Street, P.O. Box 1977, Sacramento, California 95812-1977, Telephone: (916) 341-5254, and may also be obtained from the SWRCB Internet website at: http://www.swrcb.ca.gov/stormwtr/caltrans.html.

The Department's Permit references and incorporates by reference the current Statewide General Permit issued by the SWRCB entitled "Order No. 99-08-DWQ, National Pollutant Discharge Elimination System (NPDES) General Permit No. CAS000002, Waste Discharge Requirements (WDRs) for Discharges of Storm Water Associated with Construction Activity," which regulates discharges of storm water and non-storm water from construction activities disturbing 0.4-hectare or more of soil in a common plan of development. Sampling and analysis requirements as specified in SWRCB Resolution No. 2001-46 are added to the Statewide General Permit. Copies of the Statewide General Permit and modifications thereto are available for review from the SWRCB, Storm Water Permit Unit, 1001 "I" Street, P.O. Box 1977, Sacramento, California 95812-1977, Telephone: (916) 341-5254 and may also be obtained from the SWRCB Internet website at: http://www.swrcb.ca.gov/stormwtr/construction.html.

The NPDES permits that regulate this project, as referenced above, are hereafter collectively referred to as the "Permits."

This project shall conform to the Permits and modifications thereto. The Contractor shall maintain copies of the Permits at the project site and shall make the Permits available during construction.

The Permits require the preparation of a Storm Water Pollution Prevention Plan (SWPPP). The SWPPP shall be prepared in conformance with the requirements of the Permits, the Department's "Storm Water Pollution Prevention Plan (SWPPP) and Water Pollution Control Program (WPCP) Preparation Manual," and the Department's "Construction Site Best Management Practices (BMPs) Manual," including addenda to those permits and manuals issued up to and including the date of advertisement of the project. These manuals are hereinafter referred to, respectively, as the "Preparation Manual" and the "Construction Site BMPs Manual," and collectively, as the "Manuals." Copies of the Manuals may be obtained from the

Department of Transportation, Material Operations Branch, Publication Distribution Unit, 1900 Royal Oaks Drive, Sacramento, California 95815, Telephone: (916) 445-3520, and may also be obtained from the Department's Internet website at: http://www.dot.ca.gov/hq/construc/stormwater/stormwater1.htm.

The Contractor shall know and fully comply with applicable provisions of the Permits and all modifications thereto, the Manuals, and Federal, State, and local regulations and requirements that govern the Contractor's operations and storm water and non-storm water discharges from both the project site and areas of disturbance outside the project limits during construction. Attention is directed to Sections 7-1.01, "Laws to be Observed," and 7-1.12, "Indemnification and Insurance," of the Standard Specifications.

The Permits shall apply to storm water and certain permitted non-storm water discharges from areas outside the project site which are directly related to construction activities for this contract including, but not limited to, asphalt batch plants, material borrow areas, concrete plants, staging areas, storage yards and access roads. The Contractor shall comply with the Permits and the Manuals for those areas and shall implement, inspect and maintain the required water pollution control practices. The Engineer shall be allowed full access to these areas during construction to assure Contractor's proper implementation of water pollution control practices. Installing, inspecting and maintaining water pollution control practices on areas outside the highway right of way not specifically arranged and provided for by the Department for the execution of this contract, will not be paid for.

The Contractor shall be responsible for penalties assessed or levied on the Contractor or the Department as a result of the Contractor's failure to comply with the provisions in this section "Water Pollution Control" including, but not limited to, compliance with the applicable provisions of the Permits, the Manuals, and Federal, State and local regulations and requirements as set forth therein.

Penalties as used in this section, "Water Pollution Control," shall include fines, penalties and damages, whether proposed, assessed, or levied against the Department or the Contractor, including those levied under the Federal Clean Water Act and the State Porter-Cologne Water Quality Control Act, by governmental agencies or as a result of citizen suits. Penalties shall also include payments made or costs incurred in settlement for alleged violations of the Permits, the Manuals, or applicable laws, regulations, or requirements. Costs incurred could include sums spent instead of penalties, in mitigation or to remediate or correct violations.

**RETENTION OF FUNDS**

Notwithstanding any other remedies authorized by law, the Department may retain money due the Contractor under the contract, in an amount determined by the Department, up to and including the entire amount of Penalties proposed, assessed, or levied as a result of the Contractor's violation of the Permits, the Manuals, or Federal or State law, regulations or requirements. Funds may be retained by the Department until final disposition has been made as to the Penalties. The Contractor shall remain liable for the full amount of Penalties until such time as they are finally resolved with the entity seeking the Penalties.

Retention of funds for failure to conform to the provisions in this section, "Water Pollution Control," shall be in addition to the other retention amounts required by the contract. The amounts retained for the Contractor's failure to conform to provisions in this section will be released for payment on the next monthly estimate for partial payment following the date when an approved SWPPP has been implemented and maintained, and when water pollution has been adequately controlled, as determined by the Engineer.

When a regulatory agency identifies a failure to comply with the Permits and modifications thereto, the Manuals, or other Federal, State or local requirements, the Department may retain money due the Contractor, subject to the following:

A. The Department will give the Contractor 30 days notice of the Department's intention to retain funds from partial payments which may become due to the Contractor prior to acceptance of the contract. Retention of funds from payments made after acceptance of the contract may be made without prior notice to the Contractor.
B. No retention of additional amounts out of partial payments will be made if the amount to be retained does not exceed the amount being withheld from partial payments pursuant to Section 9-1.06, "Partial Payments," of the Standard Specifications.
C. If the Department has retained funds, and it is subsequently determined that the State is not subject to the entire amount of the Costs and Liabilities assessed or proposed in connection with the matter for which the retention was made, the Department shall be liable for interest on the amount retained for the period of the retention. The interest rate payable shall be 6 percent per annum.

During the first estimate period that the Contractor fails to conform to the provisions in this section, "Water Pollution Control," the Department may retain an amount equal to 25 percent of the estimated value of the contract work performed.

The Contractor shall notify the Engineer immediately upon request from the regulatory agencies to enter, inspect, sample, monitor, or otherwise access the project site or the Contractor's records pertaining to water pollution control work. The Contractor and the Department shall provide copies of correspondence, notices of violation, enforcement actions or proposed fines by regulatory agencies to the requesting regulatory agency.

**STORM WATER POLLUTION PREVENTION PLAN PREPARATION, APPROVAL AND AMENDMENTS**

As part of the water pollution control work, a Storm Water Pollution Prevention Plan (SWPPP) is required for this contract. The SWPPP shall conform to the provisions in Section 7-1.01G, "Water Pollution," of the Standard Specifications, the requirements in the Manuals, the requirements of the Permits, and these special provisions. Upon the Engineer's approval of the SWPPP, the SWPPP shall be considered to fulfill the provisions in Section 7-1.01G, "Water Pollution," of the Standard Specifications for development and submittal of a Water Pollution Control Program.

No work having potential to cause water pollution shall be performed until the SWPPP has been approved by the Engineer. Approval shall not constitute a finding that the SWPPP complies with applicable requirements of the Permits, the Manuals and applicable Federal, State and local laws, regulations, and requirements.

The Contractor shall designate a Water Pollution Control Manager. The Water Pollution Control Manager shall be responsible for the preparation of the SWPPP and required modifications or amendments, and shall be responsible for the implementation and adequate functioning of the various water pollution control practices employed. The Contractor may designate different Water Pollution Control Managers to prepare the SWPPP and to implement the water pollution control practices. The Water Pollution Control Managers shall serve as the primary contact for issues related to the SWPPP or its implementation. The Contractor shall submit to the Engineer a statement of qualifications, describing the training, previous work history and expertise of the individual selected by the Contractor to serve as Water Pollution Control Manager. The Water Pollution Control Manager shall have a minimum of 24 hours of formal storm water management training or certification as a Certified Professional in Erosion and Sediment Control (CPESC). The Engineer will reject the Contractor's submission of a Water Pollution Control Manager if the submitted qualifications are deemed to be inadequate.

The SWPPP shall apply to the areas within and those outside of the highway right of way that are directly related to construction operations including, but not limited to, asphalt batch plants, material borrow areas, concrete plants, staging areas, storage yards, and access roads.

The SWPPP shall incorporate water pollution control practices in the following categories:

A. Soil stabilization.
B. Sediment control.
C. Wind erosion control.
D. Tracking control.
E. Non-storm water management.
F. Waste management and materials pollution control.

The SWPPP shall include, but not be limited to, the items described in the Manuals, Permits and related information contained in the contract documents.

The Contractor shall develop a Water Pollution Control Schedule that describes the timing of grading or other work activities that could affect water pollution. The Water Pollution Control Schedule shall be updated by the Contractor to reflect changes in the Contractor's operations that would affect the necessary implementation of water pollution control practices.

The Contractor shall complete the "Construction Site BMPs Consideration Checklist" presented in the Preparation Manual and shall incorporate water pollution control practices into the SWPPP. Water pollution control practices include the "Minimum Requirements" and other Contractor-selected water pollution control practices from the "Construction Site BMPs Consideration Checklist" and the "Project-Specific Minimum Requirements" identified in the Water Pollution Control Cost Break-Down of this section.

Within 20 working days after the approval of the contract, the Contractor shall submit 3 copies of the draft SWPPP to the Engineer. The Engineer will have 10 working days to review the SWPPP. If revisions are required, as determined by the Engineer, the Contractor shall revise and resubmit the SWPPP within 10 working days of receipt of the Engineer's comments. The Engineer will have 5 working days to review the revisions. Upon the Engineer's approval of the SWPPP, 4 approved copies of the SWPPP, incorporating the required changes, shall be submitted to the Engineer. In order to allow construction activities to proceed, the Engineer may conditionally approve the SWPPP while minor revisions are being completed. In the event the Engineer fails to complete the review within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for resulting losses, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

The Contractor shall prepare an amendment to the SWPPP when there is a change in construction activities or operations which may affect the discharge of pollutants to surface waters, ground waters, municipal storm drain systems, or when the Contractor's activities or operations violate a condition of the Permits, or when directed by the Engineer. Amendments shall identify additional water pollution control practices or revised operations, including those areas or operations not identified in the initially approved SWPPP. Amendments to the SWPPP shall be prepared and submitted for review and approval within a time approved by the Engineer, but in no case longer than the time specified for the initial submittal and review of the SWPPP.

The Contractor shall keep one copy of the approved SWPPP and approved amendments at the project site. The SWPPP shall be made available upon request by a representative of the Regional Water Quality Control Board, State Water Resources Control Board, United States Environmental Protection Agency, or the local storm water management agency. Requests by the public shall be directed to the Engineer.

**COST BREAK-DOWN**

The Contractor shall include a Water Pollution Control Cost Break-Down in the SWPPP which itemizes the contract lump sum for water pollution control work. The Contractor shall use the Water Pollution Control Cost Break-Down provided in this section as the basis for the cost break-down submitted with the SWPPP. The Contractor shall use the Water Pollution Control Cost Break-Down to identify items, quantities and values for water pollution control work, excluding Temporary Water Pollution Control Practices for which there are separate bid items. The Contractor shall be responsible for the accuracy of the quantities and values used in the cost break-down submitted with the SWPPP. Partial payment for the item of water pollution control will not be made until the Water Pollution Control Cost Break-Down is approved by the Engineer.

Attention is directed to "Time-Related Overhead" of these special provisions regarding compensation for time-related overhead.

Line items indicated in the Water Pollution Control Cost Break-Down in this section with a specified Estimated Quantity shall be considered "Project-Specific Minimum Requirements." The Contractor shall incorporate Project-Specific Minimum Requirements with Contractor-designated quantities and values into the Water Pollution Control Cost Break-Down submitted with the SWPPP.

Line items indicated in the Water Pollution Control Cost Break-Down in this section without a specified Estimated Quantity shall be considered by the Contractor for selection to meet the applicable "Minimum Requirements" as defined in the Manuals, or for other water pollution control work as identified in the "Construction Site BMPs Consideration Checklist" presented in the Preparation Manual. In the Water Pollution Control Cost Break-Down submitted with the SWPPP, the Contractor shall list only those water pollution control practices selected for the project, including quantities and values required to complete the work for those items.

The sum of the amounts for the items of work listed in the Water Pollution Control Cost Break-Down shall be equal to the contract lump sum price bid for water pollution control. Overhead and profit, except for time-related overhead, shall be included in the individual items listed in the cost break-down.

**WATER POLLUTION CONTROL COST BREAK-DOWN**

**Contract No. 354804**

| ITEM | ITEM DESCRIPTION | UNIT | ESTIMATED QUANTITY | VALUE | AMOUNT |
|---|---|---|---|---|---|
| SS-3 | Hydraulic Mulch | M2 | | | |
| SS-4 | Hydroseeding | M2 | | | |
| SS-5 | Soil Binders | M2 | | | |
| SS-6 | Straw Mulch | M2 | | | |
| SS-7 | Geotextiles, Plastic Covers & Erosion Control Blankets/Mats | M2 | | | |
| SS-8 | Wood Mulching | M2 | | | |
| SS-9 | Earth Dikes/Drainage Swales & Lined Ditches | M | | | |
| SS-10 | Outlet Protection/Velocity Dissipation Devices | EA | | | |
| SS-11 | Slope Drains | EA | | | |
| SS-12 | Streambank Stabilization | LS | | | |
| SC-1 | Silt Fence | M | | | |
| SC-2 | Sediment/Desilting Basin | EA | | | |
| SC-3 | Sediment Trap | EA | | | |
| SC-4 | Check Dam | EA | | | |
| SC-5 | Fiber Rolls | M | | | |
| SC-6 | Gravel Bag Berm | M | | | |
| SC-7 | Street Sweeping and Vacuuming | LS | | | |
| SC-8 | Sandbag Barrier | M | | | |
| SC-9 | Straw Bale Barrier | M | | | |
| SC-10 | Storm Drain Inlet Protection | EA | | | |
| WE-1 | Wind Erosion Control | LS | | | |
| TC-1 | Stabilized Construction Entrance/Exit | EA | | | |
| TC-2 | Stabilized Construction Roadway | EA | | | |
| TC-3 | Entrance/Outlet Tire Wash | EA | | | |
| NS-1 | Water Conservation Practices | LS | | | |
| NS-2 | Dewatering Operations | EA | | | |
| NS-3 | Paving and Grinding Operations | LS | | | |
| NS-4 | Temporary Stream Crossing | EA | | | |

| ITEM | ITEM DESCRIPTION | UNIT | ESTIMATED QUANTITY | VALUE | AMOUNT |
|---|---|---|---|---|---|
| NS-5 | Clear Water Diversion | EA | | | |
| NS-6 | Illicit Connection/Illegal Discharge Detection and Reporting | LS | | | |
| NS-7 | Potable Water/Irrigation | LS | | | |
| NS-8 | Vehicle and Equipment Cleaning | LS | | | |
| NS-9 | Vehicle and Equipment Fueling | LS | | | |
| NS-10 | Vehicle and Equipment Maintenance | LS | | | |
| NS-11 | Pile Driving Operations | LS | | | |
| NS-12 | Concrete Curing | LS | | | |
| NS-13 | Material and Equipment Use over Water | LS | | | |
| NS-14 | Concrete Finishing | LS | | | |
| NS-15 | Structure Demolition/Removal Over or Adjacent to Water | LS | | | |
| WM-1 | Material Delivery and Storage | LS | | | |
| WM-2 | Material Use | LS | | | |
| WM-3 | Stockpile Management | LS | | | |
| WM-4 | Spill Prevention and Control | LS | | | |
| WM-5 | Solid Waste Management | LS | | | |
| WM-6 | Hazardous Waste Management | LS | | | |
| WM-7 | Contaminated Soil Management | LS | | | |
| WM-8 | Concrete Waste Management | LS | | | |
| WM-9 | Sanitary/Septic Waste Management | LS | | | |
| WM-10 | Liquid Waste Management | LS | | | |

**TOTAL** _____

Adjustments in the items of work and quantities listed in the approved cost break-down shall be made when required to address amendments to the SWPPP, except when the adjusted items are paid for as extra work.

No adjustment in compensation will be made to the contract lump sum price paid for water pollution control due to differences between the quantities shown in the approved cost break-down and the quantities required to complete the work as shown on the approved SWPPP. No adjustment in compensation will be made for ordered changes to correct SWPPP work resulting from the Contractor's own operations or from the Contractor's negligence.

The approved cost break-down will be used to determine partial payments during the progress of the work and as the basis for calculating the adjustment in compensation for the item of water pollution control due to increases or decreases of quantities ordered by the Engineer. When an ordered change increases or decreases the quantities of an approved cost break-down item, the adjustment in compensation will be determined in the same manner specified for increases and decreases in the quantity of a contract item of work in conformance with the provisions in Section 4-1.03B, "Increased or Decreased Quantities," of the Standard Specifications. If an ordered change requires a new item which is not on the approved cost break-down, the adjustment in compensation will be determined in the same manner specified for extra work in conformance with Section 4-1.03D, "Extra Work," of the Standard Specifications.

If requested by the Contractor and approved by the Engineer, changes to the water pollution control practices listed in the approved cost break-down, including addition of new water pollution control practices, will be allowed. Changes shall be included in the approved amendment of the SWPPP. If the requested changes result in a net cost increase to the lump sum price for water pollution control, an adjustment in compensation will be made without change to the water pollution control item. The net cost increase to the water pollution control item will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications.

**SWPPP IMPLEMENTATION**

Unless otherwise specified, upon approval of the SWPPP, the Contractor shall be responsible throughout the duration of the project for installing, constructing, inspecting, maintaining, removing, and disposing of the water pollution control practices specified in the SWPPP and in the amendments. Unless otherwise directed by the Engineer, the Contractor's responsibility for SWPPP implementation shall continue throughout temporary suspensions of work ordered in conformance with the provisions in Section 8-1.05, "Temporary Suspension of Work," of the Standard Specifications. Requirements for installation, construction, inspection, maintenance, removal, and disposal of water pollution control practices shall conform to the requirements in the Manuals and these special provisions.

If the Contractor or the Engineer identifies a deficiency in the implementation of the approved SWPPP or amendments, the deficiency shall be corrected immediately unless requested by the Contractor and approved by the Engineer in writing, but shall be corrected prior to the onset of precipitation. If the Contractor fails to correct the identified deficiency by the date agreed or prior to the onset of precipitation, the project shall be in nonconformance with this section, "Water Pollution Control." Attention is directed to Section 5-1.01, "Authority of Engineer," of the Standard Specifications, and to "Retention of Funds" of this section for possible nonconformance penalties.

If the Contractor fails to conform to the provisions of this section, "Water Pollution Control," the Engineer may order the suspension of construction operations until the project complies with the requirements of this section.

Implementation of water pollution control practices may vary by season. The Construction Site BMPs Manual and these special provisions shall be followed for control practice selection of year-round, rainy season and non-rainy season water pollution control practices.

**Year-Round Implementation Requirements**

The Contractor shall have a year-round program for implementing, inspecting and maintaining water pollution control practices for wind erosion control, tracking control, non-storm water management, and waste management and materials pollution control.

The National Weather Service weather forecast shall be monitored and used by the Contractor on a daily basis. An alternative weather forecast proposed by the Contractor may be used if approved by the Engineer. If precipitation is predicted, the necessary water pollution control practices shall be deployed prior to the onset of the precipitation.

Disturbed soil areas shall be considered active whenever the soil disturbing activities have occurred, continue to occur or will occur during the ensuing 21 days. Non-active areas shall be protected as prescribed in the Construction Site BMPs Manual within 14 days of cessation of soil disturbing activities or prior to the onset of precipitation, whichever occurs first.

**Rainy Season Implementation Requirements**

Soil stabilization and sediment control practices shall be provided throughout the rainy season, defined as between October 1 and May 1.

An implementation schedule of required soil stabilization and sediment control practices for disturbed soil areas shall be completed no later than 20 days prior to the beginning of each rainy season. The implementation schedule shall identify the soil stabilization and sediment control practices and the dates when the implementation will be 25 percent, 50 percent and 100 percent complete, respectively. For construction activities beginning during the rainy season, the Contractor shall implement applicable soil stabilization and sediment control practices.

Throughout the defined rainy season, the active disturbed soil area of the project site shall be not more than 2 hectares. The Engineer may approve, on a case-by-case basis, expansions of the active disturbed soil area limit. Soil stabilization and sediment control materials shall be maintained on site sufficient to protect disturbed soil areas. A detailed plan for the mobilization of sufficient labor and equipment shall be maintained to deploy the water pollution control practices required to protect disturbed soil areas prior to the onset of precipitation.

**Non-Rainy Season Implementation Requirements**

The non-rainy season shall be defined as days outside the defined rainy season. The Contractor's attention is directed to the Construction Site BMPs Manual for soil stabilization and sediment control implementation requirements on disturbed soil areas during the non-rainy season. Disturbed soil areas within the project shall be protected in conformance with the requirements in the Construction Site BMPs Manual with an effective combination of soil stabilization and sediment control.

**MAINTENANCE**

To ensure the proper implementation and functioning of water pollution control practices, the Contractor shall regularly inspect and maintain the construction site for the water pollution control practices identified in the SWPPP. The construction site shall be inspected by the Contractor as follows:

A. Prior to a forecast storm.
B. After a precipitation event which causes site runoff.
C. At 24 hour intervals during extended precipitation events.
D. Routinely, a minimum of once every two weeks outside of the defined rainy season.
E. Routinely, a minimum of once every week during the defined rainy season.

The Contractor shall use the Storm Water Quality Construction Site Inspection Checklist provided in the Preparation Manual or an alternative inspection checklist provided by the Engineer. One copy of each site inspection record shall be submitted to the Engineer within 24 hours of completing the inspection.

**REPORTING REQUIREMENTS**

**Report of Discharges, Notices or Orders**

If the Contractor identifies discharges into surface waters or drainage systems in a manner causing, or potentially causing, a condition of pollution, or if the project receives a written notice or order from a regulatory agency, the Contractor shall immediately inform the Engineer. The Contractor shall submit a written report to the Engineer within 7 days of the discharge event, notice or order. The report shall include the following information:

A. The date, time, location, nature of the operation, and type of discharge, including the cause or nature of the notice or order.
B. The water pollution control practices deployed before the discharge event, or prior to receiving the notice or order.
C. The date of deployment and type of water pollution control practices deployed after the discharge event, or after receiving the notice or order, including additional measures installed or planned to reduce or prevent reoccurrence.
D. An implementation and maintenance schedule for affected water pollution control practices.

**Report of First-Time Non-Storm Water Discharge**

The Contractor shall notify the Engineer at least 3 days in advance of first-time non-storm water discharge events, excluding exempted discharges. The Contractor shall notify the Engineer of the operations causing non-storm water discharges and shall obtain field approval for first-time non-storm water discharges. Non-storm water discharges shall be monitored at first-time occurrences and routinely thereafter.

**Annual Certifications**

By June 15 of each year, the Contractor shall complete and submit an Annual Certification of Compliance, as contained in the Preparation Manual, to the Engineer.

## SAMPLING AND ANALYTICAL REQUIREMENTS

The Contractor is required to implement specific sampling and analytical procedures to determine whether BMPs implemented on the construction site are:

A. preventing pollutants that are known or should be known by permittees to occur on construction sites that are not visually detectable in storm water discharges, to cause or contribute to exceedances of water quality objectives.

### Non-Visible Pollutants

The project has the potential to discharge non-visible pollutants in storm water from the construction site. The project SWPPP shall contain a Sampling and Analysis Plan (SAP) that describes the sampling and analysis strategy and schedule to be implemented on the project for monitoring non-visible pollutants in conformance with this section.

The SAP shall identify potential non-visible pollutants that are known or should be known to occur on the construction site associated with the following: (1) construction materials, wastes or operations; (2) known existing contamination due to historical site usage; or (3) application of soil amendments, including soil stabilization products, with the potential to alter pH or contribute toxic pollutants to storm water. Planned material and waste storage areas, locations of known existing contamination, and areas planned for application of soil amendments shall be shown on the SWPPP Water Pollution Control Drawings.

The SAP shall identify a sampling schedule for collecting a sample down gradient from the applicable non-visible pollutant source and a sufficiently large uncontaminated control sample during the first two hours of discharge from rain events during daylight hours which result in a sufficient discharge for sample collection. If run-on occurs onto the non-visible pollutant source, a run-on sample that is immediately down gradient of the run-on to the Department's right of way shall be collected. A minimum of 72 hours of dry weather shall occur between rain events to distinguish separate rain events.

The SAP shall state that water quality sampling will be triggered when any of the following conditions are observed during the required storm water inspections conducted before or during a rain event:

A. Materials or wastes containing potential non-visible pollutants are not stored under watertight conditions.
B. Materials or wastes containing potential non-visible pollutants are stored under watertight conditions, but (1) a breach, leakage, malfunction, or spill is observed; and (2) the leak or spill has not been cleaned up prior to the rain event; and (3) there is the potential for discharge of non-visible pollutants to surface waters or drainage system.
C. Construction activities, such as application of fertilizer, pesticide, herbicide, methyl methacrylate concrete sealant, or non-pigmented curing compound have occurred during a rain event or within 24 hours preceding a rain event, and there is the potential for discharge of pollutants to surface waters or drainage system.
D. Soil amendments, including soil stabilization products, with the potential to alter pH levels or contribute toxic pollutants to storm water runoff have been applied, and there is the potential for discharge of pollutants to surface waters or drainage system (unless independent test data are available that demonstrate acceptable concentration levels of non-visible pollutants in the soil amendment).
E. Storm water runoff from an area contaminated by historical usage of the site is observed to combine with storm water, and there is the potential for discharge of pollutants to surface waters or drainage system.

The SAP shall identify sampling locations for collecting down gradient and control samples, and the rationale for their selection. The control sampling location shall be selected where the sample does not come into contact with materials, wastes or areas associated with potential non-visible pollutants or disturbed soil areas. Sampling locations shall be shown on the SWPPP Water Pollution Control Drawings. Only trained personnel shall collect water quality samples and be identified in the SAP. Qualifications of designated sampling personnel shall describe training and experience, and shall be included in the SWPPP. The SAP shall state monitoring preparation, sample collection procedures, quality assurance/quality control, sample labeling procedures, sample collection documentation, sample shipping and chain of custody procedures, sample numbering system, and reference the construction site health and safety plan.

The SAP shall identify the analytical method to be used for analyzing down gradient and control samples for potential non-visible pollutants on the project. For samples analyzed in the field by sampling personnel, collection, analysis, and equipment calibration shall be in conformance with the Manufacturer's specifications. For samples that will be analyzed by a laboratory, sampling, preservation, and analysis shall be performed by a State-certified laboratory in conformance with 40 CFR 136. The SAP shall identify the specific State-certified laboratory, sample containers, preservation requirements, holding times, and analysis method to be used. A list of State-certified laboratories that are approved by the Department is available at the following internet site: http://www.dhs.ca.gov/ps/ls/elap/html/lablist_county.htm.

**Analytical Results and Evaluation**

The Contractor shall submit a hard copy and electronic copy of water quality analytical results and quality assurance/quality control data to the Engineer within 5 days of sampling for field analyses and within 30 days for laboratory analyses. Analytical results shall be accompanied by an evaluation from the Contractor to determine if down gradient samples show elevated levels of the tested parameter relative to levels in the control sample. If down gradient or downstream samples, as applicable, show increased levels, the Contractor will assess the BMPs, site conditions, and surrounding influences to determine the probable cause for the increase. As determined by the assessment, the Contractor will repair or modify BMPs to address increases and amend the SWPPP as necessary. Electronic results (in one of the following file formats: .xls, .txt, .csv, .dbs, or .mdb) shall have at a minimum the following information: sample identification number, contract number, constituent, reported value, method reference, method detection limit, and reported detection limit. The Contractor shall document sample collection during rain events.

Water quality sampling documentation and analytical results shall be maintained with the SWPPP on the project site until a Notice of Completion has been submitted and approved.

If construction activities or knowledge of site conditions change, such that discharges or sampling locations change, the Contractor shall amend the SAP in conformance with this section, "Water Pollution Control."

**PAYMENT**

The contract lump sum price paid for prepare storm water pollution prevention plan shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals for doing all the work involved in developing, preparing, obtaining approval of, revising, and amending the SWPPP, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Attention is directed to Section 9-1.06, "Partial Payments," and Section 9-1.07, "Payment After Acceptance," of the Standard Specifications. Payments for prepare storm water pollution prevention plan will be made as follows:

A. After the SWPPP has been approved by the Engineer, 75 percent of the contract item price for prepare storm water pollution prevention plan will be included in the monthly partial payment estimate.
B. After acceptance of the contract in conformance with the provisions in Section 7-1.17, "Acceptance of Contract," of the Standard Specifications, payment for the remaining 25 percent of the contract item price for prepare storm water pollution prevention plan will be made in conformance with the provisions in Section 9-1.07.

The contract lump sum price paid for water pollution control shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in installing, constructing, removing, and disposing of water pollution control practices, including non-storm water management, and waste management and materials pollution water pollution control practices, except those for which there is a contract item of work as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Storm water sampling and analysis will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications. No payment will be made for the preparation, collection, analysis, and reporting of storm water samples required where appropriate BMPs are not implemented prior to a rain event, or if a failure of a BMP is not corrected prior to a rain event.

For items identified on the approved Water Pollution Control Cost Break-Down, the cost of maintaining the temporary water pollution control practices shall be divided equally by the State and the Contractor as follows:

**Soil Stabilization**

Temporary water pollution control practices except:
SS-1 Scheduling
SS-2 Preservation of Existing Vegetation

**Sediment Control**

Temporary water pollution control practices except:
SC-7 Street Sweeping and Vacuuming

**Wind Erosion Control**

No sharing of maintenance costs will be allowed.

**Tracking Control**

TC-1 Stabilized Construction Entrance/Exit.

**Non-Storm Water Management**

No sharing of maintenance costs will be allowed.

**Waste Management & Materials Pollution Control**

No sharing of maintenance costs will be allowed.

The division of cost will be made by determining the cost of maintaining water pollution control practices in conformance with the provisions in Section 9-1.03, "Force Account Payment," of the Standard Specifications and paying to the Contractor one-half of that cost. Cleanup, repair, removal, disposal, improper installation, and replacement of water pollution control practices damaged by the Contractor's negligence, shall not be considered as included in the cost for performing maintenance.

The provisions for sharing maintenance costs shall not relieve the Contractor from the responsibility for providing appropriate maintenance on items with no shared maintenance costs.

Full compensation for non-shared maintenance costs of water pollution control practices, as specified in this section, "Water Pollution Control," shall be considered as included in the contract lump sum price paid for water pollution control and no additional compensation will be allowed therefor.

Water pollution control practices for which there is a contract item of work, will be measured and paid for as that contract item of work.

## 10-1.03 TEMPORARY FENCE

Temporary fence shall be furnished, constructed, maintained, and later removed as shown on the plans, as specified in these special provisions and as directed by the Engineer.

Except as otherwise specified in this section, temporary fence shall conform to the plan details and the specifications for permanent fence of similar character as provided in Section 80, "Fences," of the Standard Specifications.

Used materials may be installed provided the used materials are good, sound and are suitable for the purpose intended, as determined by the Engineer.

Materials may be commercial quality provided the dimensions and sizes of the materials are equal to, or greater than, the dimensions and sizes shown on the plans or specified herein.

Posts shall be either metal or wood at the Contractor's option.

Galvanizing and painting of steel items will not be required.

Treating wood with a wood preservative will not be required.

Concrete footings for metal posts will not be required.

Temporary fence that is damaged during the progress of the work shall be repaired or replaced by the Contractor at the Contractor's expense.

When no longer required for the work, as determined by the Engineer, temporary fence shall be removed. Removed facilities shall become the property of the Contractor and shall be removed from the site of the work, except as otherwise provided in this section.

Removed temporary fence materials that are not damaged may be constructed in the permanent work provided the materials conform to the requirements specified for the permanent work and such materials are new when used for the temporary fence.

Holes caused by the removal of temporary fence shall be backfilled in conformance with the provisions in the second paragraph of Section 15-1.02, "Preservation of Property," of the Standard Specifications.

The various types and kinds of temporary fence will be measured and paid for in the same manner specified for permanent fence of similar character as provided in Section 80, "Fences," of the Standard Specifications.

Full compensation for maintaining, removing, and disposing of temporary fence shall be considered as included in the contract prices paid per meter for the various types of temporary fence and no additional compensation will be allowed therefor.

## 10-1.04 PRESERVATION OF PROPERTY

Attention is directed to Section 7-1.11, "Preservation of Property," of the Standard Specifications and these special provisions.

Existing trees, and shrubs that are not to be removed and are injured or damaged by reason of the Contractor's operations, shall be replaced by the Contractor with an equivalent size plant. Replacement planting shall conform to the requirements in Section 20-4.07, "Replacement," of the Standard Specifications. The Contractor shall water replacement plants in conformance with the provisions in Section 20-4.06, "Watering," of the Standard Specifications.

Damaged or injured plants shall be removed and disposed of outside the highway right of way in conformance with the provisions in Section 7-l.13 of the Standard Specifications. At the option of the Contractor, removed trees and shrubs may be reduced to chips. The chipped material shall be spread within the highway right of way at locations designated by the Engineer.

Replacement planting of injured or damaged trees, and shrubs shall be completed prior to the start of the plant establishment period. Replacement planting shall conform to the provisions in Section 20-4.05, "Planting," of the Standard Specifications.

**10-1.05 DAMAGE REPAIR**

Attention is directed to Section 7-1.16, "Contractor's Responsibility for the Work and Materials," and Section 7-1.165, "Damage by Storm, Flood, Tsunami or Earthquake," of the Standard Specifications and these special provisions.

When as a result of freezing conditions (as defined herein) during the plant establishment period, plants have died or, in the opinion of the Engineer, have deteriorated to a point beyond which the plants will not mature as typical examples of their species, the Engineer may direct replacement of the affected plants. The total cost of ordered plant replacement work will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications. A freezing condition, for the purpose of this specification, occurs when the temperature at or near the affected area has been officially recorded below 0°C and plants have been killed or damaged to the degree described above.

When the provisions in Section 7-1.165, "Damage by Storm, Flood, Tsunami or Earthquake," of the Standard Specifications are applicable, the provisions above for payment of costs for repair of damage due to rain, freezing conditions and drought shall not apply.

**10-1.06 RELIEF FROM MAINTENANCE AND RESPONSIBILITY**

The Contractor may be relieved of the duty of maintenance and protection for those items not directly connected or associated with plant establishment work in conformance with the provisions in Section 7-1.15, "Relief From Maintenance and Responsibility," of the Standard Specifications. Water pollution control, maintain existing planted areas, maintain existing irrigation facilities, transplant trees, and transplant palm trees shall not be relieved of maintenance.

**SCAFFOLDING**

Scaffolding shall be defined in accordance with and shall conform to the Construction Safety Orders of the Division of Occupational Safety and Health and these special provisions.

If scaffolding is constructed for this project over or adjacent to traffic, or suspended from the traveled way, the Contractor shall submit to the Engineer working drawings for scaffolding systems in conformance with Section 5-1.02, "Plans and Working Drawings'" of the Standard Specifications, and these special provisions.

Scaffolding working drawings shall include the following items:

A. Descriptions, calculations, and values for all loads anticipated during the erection, use, and removal of scaffolding.
A. Methods and equipment for erecting, moving, and removing scaffolding.
B. Design details including bolt layouts, welding details, and any connections to existing structures.
C. Stress sheets including a summary of computed stresses in the (1) scaffolding, (2) connections between scaffolding and any existing structures and (3) existing load supporting members. The computed stresses shall include the effects of erection, movement, and removal of the scaffolding.

The scaffolding manufacturer's name, address, and phone number shall be shown on the working drawings.

The working drawings shall be stamped and signed by an engineer who is registered as a Civil Engineer. In addition, prior to submitting the working drawings to the Engineer, the working drawings shall be stamped and signed by an independent reviewer who is registered as a Civil Engineer in the State of California. The independent reviewer shall not be employed by the same entity preparing the working drawings.

The Contractor shall allow 1 week for the review of a complete submittal for scaffolding working drawings. In the event the Engineer fails to complete the review within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

Welding for the manufacturing and erection of scaffolding shall conform to the requirements in AWS D1.1 or D1.2 for steel or aluminum construction respectively.

Full compensation for conforming to the above requirements shall be considered as included in the contract prices paid for the various contract items of work, and no additional compensation will be allowed therefor.

## 10-1.07 COOPERATION

Attention is directed to Section 7-1.14, "Cooperation," and Section 8-1.10, "Utility and Non-Highway Facilities," of the Standard Specifications and these special provisions.

It is anticipated that work by another contractor may be in progress adjacent to or within the limits of this project during progress of the work on this contract.

Contracts which may be in progress include but are not limited to:

08-463504_Valley Way interchange modification

08-496104_Traffic Operations System

08-1A3004_Landscaping

## 10-1.08 PROGRESS SCHEDULE (CRITICAL PATH METHOD)

The Contractor shall submit to the Engineer practicable critical path method (CPM) progress schedules in conformance with these special provisions. Whenever the term "schedule" is used in this section it shall mean CPM progress schedule.

Attention is directed to "Payments" of Section 5 of these special provisions.

The provisions in Section 8-1.04, "Progress Schedule," of the Standard Specifications shall not apply.

### DEFINITIONS

The following definitions shall apply to this section:

A. ACTIVITY.—A task, event or other project element on a schedule that contributes to completing the project. Activities have a description, start date, finish date, duration and one or more logic ties.
B. BASELINE SCHEDULE.—The initial schedule representing the Contractor's work plan on the first working day of the project.
C. CONTRACT COMPLETION DATE.—The current extended date for completion of the contract shown on the weekly statement of working days furnished by the Engineer in conformance with the provisions in Section 8-1.06, "Time of Completion," of the Standard Specifications.
D. CRITICAL PATH.—The longest continuous chain of activities for the project that has the least amount of total float of all chains. In general, a delay on the critical path will extend the scheduled completion date.
E. CRITICAL PATH METHOD (CPM).—A network based planning technique using activity durations and the relationships between activities to mathematically calculate a schedule for the entire project.
F. DATA DATE.—The day after the date through which a schedule is current. Everything occurring earlier than the data date is "as-built" and everything on or after the data date is "planned."
G. EARLY COMPLETION TIME.—The difference in time between an early scheduled completion date and the contract completion date.
H. FLOAT.—The difference between the earliest and latest allowable start or finish times for an activity.
I. MILESTONE.—An event activity that has zero duration and is typically used to represent the beginning or end of a certain stage of the project.
J. NARRATIVE REPORT.—A document submitted with each schedule that discusses topics related to project progress and scheduling.
K. NEAR CRITICAL PATH.—A chain of activities with total float exceeding that of the critical path but having no more than 10 working days of total float.
L. SCHEDULED COMPLETION DATE.—The planned project finish date shown on the current accepted schedule.
M. STATE OWNED FLOAT ACTIVITY.—The activity documenting time saved on the critical path by actions of the State. It is the last activity prior to the scheduled completion date.
N. TIME IMPACT ANALYSIS.—A schedule and narrative report developed specifically to demonstrate what effect a proposed change or delay has on the current scheduled completion date.
O. TOTAL FLOAT.—The amount of time that an activity or chain of activities can be delayed before extending the scheduled completion date.
P. UPDATE SCHEDULE.—A current schedule developed from the baseline or subsequent schedule through regular monthly review to incorporate as-built progress and any planned changes.

### GENERAL REQUIREMENTS

The Contractor shall submit to the Engineer baseline, monthly update and final update schedules, each consistent in all respects with the time and order of work requirements of the contract. The project work shall be executed in the sequence indicated on the current accepted schedule.

Schedules shall show the order in which the Contractor proposes to carry out the work with logical links between time-scaled work activities, and calculations made using the critical path method to determine the controlling operation or operations. The Contractor is responsible for assuring that all activity sequences are logical and that each schedule shows a coordinated plan for complete performance of the work.

The Contractor shall produce schedules using computer software and shall furnish compatible software for the Engineer's exclusive possession and use. The Contractor shall furnish network diagrams, narrative reports, tabular reports and schedule data as parts of each schedule submittal.

Schedules shall include, but not be limited to, activities that show the following that are applicable to the project:

A. Project characteristics, salient features, or interfaces, including those with outside entities, that could affect time of completion.
B. Project start date, scheduled completion date and other milestones.
C. Work performed by the Contractor, subcontractors and suppliers.
D. Submittal development, delivery, review and approval, including those from the Contractor, subcontractors and suppliers.
E. Procurement, delivery, installation and testing of materials, plants and equipment.
F. Testing and settlement periods.
G. Utility notification and relocation.
H. Erection and removal of falsework and shoring.
I. Major traffic stage switches.
J. Finishing roadway and final cleanup.
K. State-owned float as the predecessor activity to the scheduled completion date.

Schedules shall have not less than 50 and not more than 500 activities, unless otherwise authorized by the Engineer. The number of activities shall be sufficient to assure adequate planning of the project, to permit monitoring and evaluation of progress, and to do an analysis of time impacts.

Schedule activities shall include the following:

A. A clear and legible description.
B. Start and finish dates.
C. A duration of not less than one working day, except for event activities, and not more than 20 working days, unless otherwise authorized by the Engineer.
D. At least one predecessor and one successor activity, except for project start and finish milestones.
E. Required constraints.
F. Codes for responsibility, stage, work shifts, location and contract pay item numbers.

The Contractor may show early completion time on any schedule provided that the requirements of the contract are met. Early completion time shall be considered a resource for the exclusive use of the Contractor. The Contractor may increase early completion time by improving production, reallocating resources to be more efficient, performing sequential activities concurrently or by completing activities earlier than planned. The Contractor may also submit for approval a cost reduction incentive proposal in conformance with the provisions in Section 5-1.14, "Cost Reduction Incentive," of the Standard Specifications that will reduce time of construction.

The Contractor may show a scheduled completion date that is later than the contract completion date on an update schedule, after the baseline schedule is accepted. The Contractor shall provide an explanation for a late scheduled completion date in the narrative report that is included with the schedule.

State-owned float shall be considered a resource for the exclusive use of the State. The Engineer may accrue State-owned float by the early completion of review of any type of required submittal when it saves time on the critical path. The Contractor shall prepare a time impact analysis, when requested by the Engineer, to determine the effect of the action in conformance with the provisions in "Time Impact Analysis" specified herein. The Engineer will document State-owned float by directing the Contractor to update the State-owned float activity on the next update schedule. The Contractor shall include a log of the action on the State-owned float activity and include a discussion of the action in the narrative report. The Engineer may use State-owned float to mitigate past, present or future State delays by offsetting potential time extensions for contract change orders.

The Engineer may adjust contract working days for ordered changes that affect the scheduled completion date, in conformance with the provisions in Section 4-1.03, "Changes," of the Standard Specifications. The Contractor shall prepare a time impact analysis to determine the effect of the change in conformance with the provisions in "Time Impact Analysis" specified herein, and shall include the impacts acceptable to the Engineer in the next update schedule. Changes that do not affect the controlling operation on the critical path will not be considered as the basis for a time adjustment. Changes that do affect the controlling operation on the critical path will be considered by the Engineer in decreasing time or granting an

extension of time for completion of the contract. Time extensions will only be granted if the total float is absorbed and the scheduled completion date is delayed one or more working days because of the ordered change.

The Engineer's review and acceptance of schedules shall not waive any contract requirements and shall not relieve the Contractor of any obligation thereunder or responsibility for submitting complete and accurate information. Schedules that are rejected shall be corrected by the Contractor and resubmitted to the Engineer within 5 working days of notification by the Engineer, at which time a new review period of one week will begin.

Errors or omissions on schedules shall not relieve the Contractor from finishing all work within the time limit specified for completion of the contract. If, after a schedule has been accepted by the Engineer, either the Contractor or the Engineer discover that any aspect of the schedule has an error or omission, it shall be corrected by the Contractor on the next update schedule.

**COMPUTER SOFTWARE**

The Contractor shall submit to the Engineer for approval a description of proposed software before delivery. The software shall be the current version of Primavera SureTrak Project Manager for Windows, or equal, and shall be compatible with Windows NT (version 4.0) operating system. If software other than SureTrak is proposed, it shall be capable of generating files that can be imported into SureTrak.

The Contractor shall furnish schedule software and all original software instruction manuals to the Engineer with submittal of the baseline schedule. The furnished schedule software shall become the property of the State and will not be returned to the Contractor. The State will compensate the Contractor in conformance with the provisions in Section 4-1.03, "Extra Work," of the Standard Specifications for replacement of software which is damaged, lost or stolen after delivery to the Engineer.

The Contractor shall instruct the Engineer in the use of the software and provide software support until the contract is accepted. Within 20 working days of contract approval, the Contractor shall provide a commercial 8-hour training session for 2 Department employees in the use of the software at a location acceptable to the Engineer. It is recommended that the Contractor also send at least 2 employees to the same training session to facilitate development of similar knowledge and skills in the use of the software. If software other than SureTrak is furnished, then the training session shall be a total of 16-hours for each Department employee.

**NETWORK DIAGRAMS, REPORTS AND DATA**

The Contractor shall include the following for each schedule submittal:

A. Two sets of originally plotted, time-scaled network diagrams.
B. Two copies of a narrative report.
C. Two copies of each of 3 sorts of the CPM software-generated tabular reports.
D. One 1.44-megabyte 90 mm (3.5 inch) floppy diskette containing the schedule data.

The time-scaled network diagrams shall conform to the following:

A. Show a continuous flow of information from left to right.
B. Be based on early start and early finish dates of activities.
C. Clearly show the primary paths of criticality using graphical presentation.
D. Be prepared on E-size sheets, 860 mm x 1120 mm (34 inch x 44 inch).
E. Include a title block and a timeline on each page.

The narrative report shall be organized in the following sequence with all applicable documents included:

A. Contractor's transmittal letter.
B. Work completed during the period.
C. Identification of unusual conditions or restrictions regarding labor, equipment or material; including multiple shifts, 6-day work weeks, specified overtime or work at times other than regular days or hours.
D. Description of the current critical path.
E. Changes to the critical path and scheduled completion date since the last schedule submittal.
F. Description of problem areas.
G. Current and anticipated delays:

    1. Cause of delay.
    2. Impact of delay on other activities, milestones and completion dates.
    3. Corrective action and schedule adjustments to correct the delay.

H. Pending items and status thereof:

1. Permits
2. Change orders
3. Time adjustments
4. Non-compliance notices

I. Reasons for an early or late scheduled completion date in comparison to the contract completion date.

Tabular reports shall be software-generated and provide information for each activity included in the project schedule. Three different reports shall be sorted by (1) activity number, (2) early start and (3) total float. Tabular reports shall be 215 mm x 280 mm (8 1/2 inch x 11 inch) in size and shall include, as a minimum, the following applicable information:

A. Data date
B. Activity number and description
C. Predecessor and successor activity numbers and descriptions
D. Activity codes
E. Scheduled, or actual and remaining durations (work days) for each activity
F. Earliest start (calendar) date
G. Earliest finish (calendar) date
H. Actual start (calendar) date
I. Actual finish (calendar) date
J. Latest start (calendar) date
K. Latest finish (calendar) date
L. Free float (work days)
M. Total float (work days)
N. Percentage of activity complete and remaining duration for incomplete activities.
O. Lags
P. Required constraints

Schedule submittals will only be considered complete when all documents and data have been provided as described above.

**PRE-CONSTRUCTION SCHEDULING CONFERENCE**

The Contractor shall schedule and the Engineer will conduct a pre-construction scheduling conference with the Contractor's project manager and construction scheduler within 10 working days of the approval of the contract. At this meeting the Engineer will review the requirements of this section of the special provisions with the Contractor.

The Contractor shall submit a general time-scaled logic diagram displaying the major activities and sequence of planned operations and shall be prepared to discuss the proposed work plan and schedule methodology that comply with the requirements of these special provisions. If the Contractor proposes deviations to the construction staging of the project, then the general time-scaled logic diagram shall also display the deviations and resulting time impacts. The Contractor shall be prepared to discuss the proposal.

At this meeting, the Contractor shall additionally submit the alphanumeric coding structure and the activity identification system for labeling the work activities. To easily identify relationships, each activity description shall indicate its associated scope or location of work by including such terms as quantity of material, type of work, bridge number, station to station location, side of highway (such as left, right, northbound, southbound), lane number, shoulder, ramp name, ramp line descriptor or mainline.

The Engineer will review the logic diagram, coding structure, and activity identification system, and provide any required baseline schedule changes to the Contractor for implementation.

**BASELINE SCHEDULE**

Beginning the week following the pre-construction scheduling conference, the Contractor shall meet with the Engineer weekly until the baseline schedule is accepted by the Engineer to discuss schedule development and resolve schedule issues.

The Contractor shall submit to the Engineer a baseline schedule within 20 working days of approval of the contract. The Contractor shall allow 3 weeks for the Engineer's review after the baseline schedule and all support data are submitted. In addition, the baseline schedule submittal will not be considered complete until the computer software is delivered and installed for use in review of the schedule.

The baseline schedule shall include the entire scope of work and how the Contractor plans to complete all work contemplated. The baseline schedule shall show the activities that define the critical path. Multiple critical paths and near-critical paths shall be kept to a minimum. A total of not more than 50 percent of the baseline schedule activities shall be critical or near critical, unless otherwise authorized by the Engineer.

The baseline schedule shall not extend beyond the number of working days specified in these special provisions. The baseline schedule shall have a data date of the first working day of the contract and not include any completed work to date. The baseline schedule shall not attribute negative float or negative lag to any activity.

If the Contractor submits an early completion baseline schedule that shows contract completion in less than 85 percent of the working days specified in these special provisions, the baseline schedule shall be supplemented with resource allocations for every task activity and include time-scaled resource histograms. The resource allocations shall be shown to a level of detail that facilitates report generation based on labor crafts and equipment classes for the Contractor and subcontractors. The Contractor shall use average composite crews to display the labor loading of on-site construction activities. The Contractor shall optimize and level labor to reflect a reasonable plan for accomplishing the work of the contract and to assure that resources are not duplicated in concurrent activities. The time-scaled resource histograms shall show labor crafts and equipment classes to be utilized on the contract. The Engineer may review the baseline schedule activity resource allocations using Means Productivity Standards or equivalent to determine if the schedule is practicable.

**UPDATE SCHEDULE**

The Contractor shall submit an update schedule and meet with the Engineer to review contract progress, on or before the first day of each month, beginning one month after the baseline schedule is accepted. The Contractor shall allow 2 weeks for the Engineer's review after the update schedule and all support data are submitted, except that the review period shall not start until the previous month's required schedule is accepted. Update schedules that are not accepted or rejected within the review period will be considered accepted by the Engineer.

The update schedule shall have a data date of the twenty-first day of the month or other date established by the Engineer. The update schedule shall show the status of work actually completed to date and the work yet to be performed as planned. Actual activity start dates, percent complete and finish dates shall be shown as applicable. Durations for work that has been completed shall be shown on the update schedule as the work actually occurred, including Engineer submittal review and Contractor resubmittal times.

The Contractor may include modifications such as adding or deleting activities or changing activity constraints, durations or logic that do not (1) alter the critical path(s) or near critical path(s) or (2) extend the scheduled completion date compared to that shown on the current accepted schedule. The Contractor shall state in writing the reasons for any changes to planned work. If any proposed changes in planned work will result in (1) or (2) above, then the Contractor shall submit a time impact analysis as described herein.

**TIME IMPACT ANALYSIS**

The Contractor shall submit a written time impact analysis (TIA) to the Engineer with each request for adjustment of contract time, or when the Contractor or Engineer consider that an approved or anticipated change may impact the critical path or contract progress.

The TIA shall illustrate the impacts of each change or delay on the current scheduled completion date or internal milestone, as appropriate. The analysis shall use the accepted schedule that has a data date closest to and prior to the event. If the Engineer determines that the accepted schedule used does not appropriately represent the conditions prior to the event, the accepted schedule shall be updated to the day before the event being analyzed. The TIA shall include an impact schedule developed from incorporating the event into the accepted schedule by adding or deleting activities, or by changing durations or logic of existing activities. If the impact schedule shows that incorporating the event modifies the critical path and scheduled completion date of the accepted schedule, the difference between scheduled completion dates of the two schedules shall be equal to the adjustment of contract time. The Engineer may construct and utilize an appropriate project schedule or other recognized method to determine adjustments in contract time until the Contractor provides the TIA.

The Contractor shall submit a TIA in duplicate within 15 working days of receiving a written request for a TIA from the Engineer. The Contractor shall allow the Engineer 2 weeks after receipt to approve or reject the submitted TIA. All approved TIA schedule changes shall be shown on the next update schedule.

If a TIA submitted by the Contractor is rejected by the Engineer, the Contractor shall meet with the Engineer to discuss and resolve issues related to the TIA. If agreement is not reached, the Contractor will be allowed 15 days from the meeting with the Engineer to give notice in conformance with the provisions in Section 9-1.04, "Notice of Potential Claim," of the Standard Specifications. The Contractor shall only show actual as-built work, not unapproved changes related to the TIA, in subsequent update schedules. If agreement is reached at a later date, approved TIA schedule changes shall be shown on the next update schedule. The Engineer will withhold remaining payment on the schedule contract item if a TIA is requested by the Engineer and not submitted by the Contractor within 15 working days. The schedule item payment will resume on the next estimate after the requested TIA is submitted. No other contract payment will be retained regarding TIA submittals.

**FINAL UPDATE SCHEDULE**

The Contractor shall submit a final update, as-built schedule with actual start and finish dates for the activities, within 30 days after completion of contract work. The Contractor shall provide a written certificate with this submittal signed by the Contractor's project manager and an officer of the company stating, "To my knowledge and belief, the enclosed final update schedule reflects the actual start and finish dates of the actual activities for the project contained herein." An officer of the company may delegate in writing the authority to sign the certificate to a responsible manager.

**RETENTION**

The Department will retain an amount equal to 25 percent of the estimated value of the work performed during each estimate period in which the Contractor fails to submit an acceptable schedule conforming to the requirements of these special provisions as determined by the Engineer. Schedule retentions will be released for payment on the next monthly estimate for partial payment following the date that acceptable schedules are submitted to the Engineer or as otherwise specified herein. Upon completion of all contract work and submittal of the final update schedule and certification, any remaining retained funds associated with this section, "Progress Schedule (Critical Path Method)", will be released for payment. Retentions held in conformance with this section shall be in addition to other retentions provided for in the contract. No interest will be due the Contractor on retention amounts.

**PAYMENT**

Progress schedule (critical path method) will be paid for at a lump sum price. The contract lump sum price paid for progress schedule (critical path method) shall include full compensation for furnishing all labor, material, tools, equipment, and incidentals, including computer software, and for doing all the work involved in preparing, furnishing, and updating schedules, and instructing and assisting the Engineer in the use of computer software, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Payments for the progress schedule (critical path method) contract item will be made progressively as follows:

A. A total of 25 percent of the item amount or a total of 25 percent of the amount listed for progress schedule (critical path method) in "Payments" of Section 5 of these special provisions, whichever is less, will be paid upon achieving all of the following:

    1. Completion of 5 percent of all contract item work.
    2. Acceptance of all schedules and TIAs required to the time when 5 percent of all contract item work is complete.
    3. Delivery of schedule software to the Engineer.
    4. Completion of required schedule software training.

B. A total of 50 percent of the item amount or a total of 50 percent of the amount listed for progress schedule (critical path method) in "Payments" of Section 5 of these special provisions, whichever is less, will be paid upon completion of 25 percent of all contract item work and acceptance of all schedules and TIAs required to the time when 25 percent of all contract item work is complete.
C. A total of 75 percent of the item amount or a total of 75 percent of the amount listed for progress schedule (critical path method) in "Payments" of Section 5 of these special provisions, whichever is less, will be paid upon completion of 50 percent of all contract item work and acceptance of all schedules and TIAs required to the time when 50 percent of all contract item work is complete.
D. A total of 100 percent of the item amount or a total of 100 percent of the amount listed for progress schedule (critical path method) in "Payments" of Section 5 of these special provisions, whichever is less, will be paid upon completion of all contract item work, acceptance of all schedules and TIAs required to the time when all contract item work is complete, and submittal of the certified final update schedule.

If the Contractor fails to complete any of the work or provide any of the schedules required by this section, the Engineer shall make an adjustment in compensation in conformance with the provisions in Section 4-1.03C, "Changes in Character of Work," of the Standard Specifications for the work not performed. Adjustments in compensation for schedules will not be made for any increased or decreased work ordered by the Engineer in furnishing schedules.

**10-1.09 TIME-RELATED OVERHEAD**

The Contractor will be compensated for time-related overhead as described below and in conformance with “Force Account Payment” of these special provisions. The Contractor will not be compensated for time-related overhead for delays to the controlling operations caused by the Engineer that occur prior to the first working day, but will be compensated for actual overhead costs incurred, as determined by an independent Certified Public Accountant audit examination and report.

Attention is directed to "Beginning of Work, Time of Completion and Liquidated Damages," "Force Account Payment," and "Progress Schedule (Critical Path Method)" of these special provisions.

The provisions in Section 9-1.08, "Adjustment of Overhead Costs," of the Standard Specifications shall not apply.

Time-related overhead shall consist of those overhead costs, including field and home office overhead, that are in proportion to the time required to complete the work. Time-related overhead shall not include costs that are not related to time, including but not limited to, mobilization, licenses, permits, and other charges incurred only once during the contract. Time-related overhead shall not apply to subcontractors of any tier, suppliers, fabricators, manufacturers, or other parties associated with the Contractor.

Field office overhead expenses include time-related costs associated with the normal and recurring operations of the construction project, and shall not include costs directly attributable to the work of the contract. Time-related costs of field office overhead include, but are not limited to, salaries, benefits, and equipment costs of project managers, general superintendents, field office managers and other field office staff assigned to the project, and rent, utilities, maintenance, security, supplies, and equipment costs of the project field office.

Home office overhead or general and administrative expenses refer to the fixed costs of operating the Contractor's business. These costs include, but are not limited to, general administration, insurance, personnel and subcontract administration, purchasing, accounting, and project engineering and estimating. Home office overhead costs shall exclude expenses specifically related to other contracts or other businesses of the Contractor, equipment coordination, material deliveries, and consultant and legal fees.

The amount of time-related overhead associated with a reduction in contract time for cost reduction incentive proposals accepted and executed in conformance with the provisions in Section 5-1.14, "Cost Reduction Incentive," of the Standard Specifications shall be considered a construction cost attributable to the resultant estimated net savings due to the cost reduction incentive.

If the final increased amount of time-related overhead exceeds 149 percent of the contract lump sum price bid, the Contractor shall, within 60 days of the Engineer's written request, submit to the Engineer an audit examination and report performed by an independent Certified Public Accountant of the Contractor's actual overhead costs. The audit examination and report shall depict the Contractor's project and company-wide financial records and shall specify the actual overall average daily rates for both field and home office overhead for the entire duration of the project, and whether the costs have been properly allocated. The rates of field and home office overhead shall exclude unallowable costs as determined in the Federal Acquisition Regulations, 48 CFR, Chapter 1, Part 31.

Independent Certified Public Accountant's audit examinations shall be performed in conformance with the requirements of the American Institute of Certified Public Accountants Attestation Standards. Audit examinations and reports shall determine if the rates of field office overhead and home office overhead are:

A. Allowable in conformance with the requirements of the Federal Acquisition Regulations, 48 CFR, Chapter 1, Part 31.
B. Adequately supported by reliable documentation.
C. Related solely to the project under examination.

Within 20 days of receipt of the Engineer's written request, the Contractor shall make its financial records available for audit by the State for the purpose of verifying the actual rate of time-related overhead specified in the audit submitted by the Contractor. The actual rate of time-related overhead specified in the audit, submitted by the Contractor, will be subject to approval by the Engineer.

If the Engineer requests the independent Certified Public Accountant audit, or if it is requested in writing by the Contractor, the contract lump sum payment for time-related overhead, in excess of 149 percent of the lump sum price bid, will be adjusted to reflect the actual rate.

The cost of performing an independent Certified Public Accountant audit examination and submitting the report, requested by the Engineer, will be borne equally by the State and the Contractor. The division of the cost will be made by determining the cost of providing an audit examination and report in conformance with the provisions of Section 9-1.03B, "Work Performed by Special Forces or Other Special Services" of the Standard Specifications, and paying to the Contractor one-half of that cost. The cost of performing an audit examination and submitting the independent Certified Public Accountant audit report for overhead claims other than for the purpose of verifying the actual rate of time-related overhead shall be entirely borne by the Contractor. The cost of performing an audit examination and submitting the independent Certified Public Accountant audit report to verify actual overhead costs incurred prior to the first working day shall be entirely borne by the Contractor.

Time-related overhead will be paid for at a lump sum price. The contract lump sum price bid for time-related overhead will be increased or decreased only as a result of suspensions or adjustments of contract time which revise the current contract completion date and which satisfy any of the following criteria:

A. Suspensions of work ordered in conformance with the provisions in Section 8-1.05, "Temporary Suspension of Work," of the Standard Specifications, except:

1. Suspensions ordered due to weather conditions being unfavorable for the suitable prosecution of the controlling operation or operations.
2. Suspensions ordered due to the failure on the part of the Contractor to carry out orders given, or to perform the provisions of the contract.
3. Suspensions ordered due to factors beyond the control of and not caused by the State or the Contractor, for which the Contractor is granted extensions of time in conformance with the provisions of the third paragraph of Section 8-1.07, "Liquidated Damages," of the Standard Specifications.
4. Other suspensions that mutually benefit the State and the Contractor.

B. Extensions of contract time granted by the State in conformance with the provisions in the fifth paragraph in Section 8-1.07, "Liquidated Damages," of the Standard Specifications and set forth in approved contract change orders, in conformance with the provisions in Section 4-1.03, "Changes," of the Standard Specifications.
C. Reductions in contract time set forth in approved contract change orders, in conformance with the provisions in Section 4-1.03, "Changes," of the Standard Specifications.

For each day the number of working days bid to complete the contract, in conformance with the provisions in "Beginning Of Work, Time Of Completion And Liquidated Damages," of these special provisions, is increased or decreased due to suspensions or adjustments of contract time as specified above, the lump sum price for time-related overhead will be increased or decreased by an amount equal to the contract lump sum price bid for time-related overhead divided by the number of working days bid to complete the contract.

In the event an early completion progress schedule, as defined in "Progress Schedule (Critical Path Method)" of these special provisions, is submitted by the Contractor and approved by the Engineer, the amount of time-related overhead eligible for payment will be based on the total number of working days for the project, in conformance with the provisions in "Beginning of Work, Time of Completion and Liquidated Damages" of these special provisions, rather than the Contractor's early completion progress schedule.

The contract lump sum price paid for time-related overhead shall include full compensation for time-related overhead, including the Contractor's share of costs of an independent Certified Public Accountant audit of overhead costs requested by the Engineer, as specified in these special provisions, and as directed by the Engineer.

The provisions in Sections 4-1.03B, "Increased or Decreased Quantities," and 4-1.03C, "Changes in Character of the Work," of the Standard Specifications shall not apply to the contract item of time-related overhead.

Full compensation for additional overhead costs incurred during days of inclement weather when the contract work is extended into additional construction seasons due to delays caused by the State shall be considered as included in the time-related overhead paid during the contract working days, and no additional compensation will be allowed therefor.

Full compensation for additional overhead costs involved in performing additional contract item work that is not a controlling operation shall be considered as included in the contract items of work involved, and no additional compensation will be allowed therefor.

Full compensation for overhead, other than time-related overhead measured and paid for as specified above, and other than overhead costs included in the markups specified in "Force Account Payment" of these special provisions, shall be considered as included in the various items of work and no additional compensation will be allowed therefor.

Overhead costs incurred by subcontractors of any tier, suppliers, fabricators, manufacturers, and other parties associated with the Contractor shall be considered as included in the various items of work and as specified in Section 9-1.03, “Force Account Payment,” of the Standard Specifications.

For the purpose of making partial payments pursuant to the provisions in Section 9-1.06, "Partial Payments," of the Standard Specifications, the amount of time-related overhead in each monthly partial payment will be based on the number of working days that occurred during that monthly estimate period, including compensable suspensions and right of way delays. Working days granted by contract change order due to extra work or changes in character of work, will be compensated upon completion of the contract. The amount earned per working day for time-related overhead shall be the lesser of the following amounts:

A. The contract lump sum price for time-related overhead, divided by the number of working days bid to complete the contract, in conformance with the provisions in "Beginning Of Work, Time Of Completion And Liquidated Damages," of these special provisions.
B. Twenty percent of the original total contract amount, divided by the number of working days bid to complete the contract, in conformance with the provisions in "Beginning Of Work, Time Of Completion And Liquidated Damages," of these special provisions.

After the work has been completed, except plant establishment work, as provided in Section 20-4.08, "Plant Establishment Work," of the Standard Specifications, the amount of the total contract lump sum price for time-related overhead not yet paid will be included for payment in the first estimate made after completion of roadway construction work, in conformance with the provisions in Section 9-1.06, "Partial Payments," of the Standard Specifications.

**10-1.10 OBSTRUCTIONS**

Attention is directed to Section 8-1.10, "Utility and Non-Highway Facilities," Section 15, "Existing Highway Facilities," and Section 51-1.19, "Utility Facilities," of the Standard Specifications and these special provisions.

The Contractor shall notify the Engineer in writing at least 30 days in advance of the date or dates that the interfering utility facilities are to be rearranged. The Engineer will, in turn, notify the owners of the utility facilities.

The utility facilities listed in the following table, and other utility facilities that possibly exist at locations which might interfere with the pile driving or drilling operations, soil anchor drilling operation or substructure construction, will not be rearranged in advance of or during construction operations. Should the Contractor desire to have any of the utility facilities rearranged or temporarily deactivated for his convenience, the Contractor shall make the necessary arrangements as provided in Section 8-1.10:

| Utility Facility | Location |
|---|---|
| Drainage RCB, Steel Sewer, Telephone Line & Water Line | Soundwall SW #58 |

Full compensation for conforming to the requirements of this section, not otherwise provided for, shall be considered as included in the prices paid for the various contract items of work involved and no additional compensation will be allowed therefor.

**10-1.11 DUST CONTROL**

Dust control shall conform to the provisions in Section 10, "Dust Control," of the Standard Specifications.

**10-1.12 MOBILIZATION**

Mobilization shall conform to the provisions in Section 11, "Mobilization," of the Standard Specifications.

**10-1.13 CONSTRUCTION AREA TRAFFIC CONTROL DEVICES**

Flagging, signs, and all other traffic control devices furnished, installed, maintained, and removed when no longer required shall conform to the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

Category 1 traffic control devices are defined as those devices that are small and lightweight (less than 45 kg), and have been in common use for many years. The devices shall be known to be crashworthy by crash testing, crash testing of similar devices, or years of demonstrable safe performance. Category 1 traffic control devices include traffic cones, plastic drums, portable delineators, and channelizers.

If requested by the Engineer, the Contractor shall provide written self-certification for crashworthiness of Category 1 traffic control devices. Self-certification shall be provided by the manufacturer or Contractor and shall include the following: date, Federal Aid number (if applicable), expenditure authorization, district, county, route and kilometer post of project limits; company name of certifying vendor, street address, city, state and zip code; printed name, signature and title of certifying person; and an indication of which Category 1 traffic control devices will be used on the project. The Contractor may obtain a standard form for self-certification from the Engineer.

Category 2 traffic control devices are defined as those items that are small and lightweight (less than 45 kg), that are not expected to produce significant vehicular velocity change, but may otherwise be potentially hazardous. Category 2 traffic control devices include: barricades and portable sign supports.

Category 2 devices purchased on or after October 1, 2000 shall be on the Federal Highway Administration (FHWA) Acceptable Crashworthy Category 2 Hardware for Work Zones list. This list is maintained by FHWA and can be located at the following internet address: http://safety.fhwa.dot.gov/fourthlevel/hardware/listing.cfm?code=workzone. The Department maintains a secondary list at the following internet address: http://www.dot.ca.gov/hq/traffops/signtech/signdel/pdf.htm.

Category 2 devices that have not received FHWA acceptance, and were purchased before October 1, 2000, may continue to be used until they complete their useful service life or until January 1, 2003, whichever comes first. Category 2 devices in use that have received FHWA acceptance shall be labeled with the FHWA acceptance letter number and the name of the manufacturer by the start of the project. The label shall be readable. After January 1, 2003, all Category 2 devices without a label shall not be used on the project.

If requested by the Engineer, the Contractor shall provide a written list of Category 2 devices to be used on the project at least 5 days prior to beginning any work using the devices. For each type of device, the list shall indicate the FHWA acceptance letter number and the name of the manufacturer.

Full compensation for providing self-certification for crashworthiness of Category 1 traffic control devices and for providing a list of Category 2 devices used on the project and labeling Category 2 devices as specified shall be considered as included in the prices paid for the various contract items of work requiring the use of the Category 1 or Category 2 traffic control devices and no additional compensation will be allowed therefor.

### 10-1.14 CONSTRUCTION AREA SIGNS

Construction area signs shall be furnished, installed, maintained, and removed when no longer required in conformance with the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

Attention is directed to the provisions in "Prequalified and Tested Signing and Delineation Materials" of these special provisions. Type II retroreflective sheeting shall not be used on construction area sign panels.

Attention is directed to "Construction Project Information Signs" of these special provisions regarding the number and type of construction project information signs to be furnished, erected, maintained, and removed and disposed of.

The Contractor shall notify the appropriate regional notification center for operators of subsurface installations at least 2 working days, but not more than 14 calendar days, prior to commencing excavation for construction area sign posts. The regional notification centers include, but are not limited to, the following:

| Notification Center | Telephone Number |
|---|---|
| Underground Service Alert-Northern California (USA) | 1-800-642-2444<br>1-800-227-2600 |
| Underground Service Alert-Southern California (USA) | 1-800-422-4133<br>1-800-227-2600 |

Excavations required to install construction area signs shall be performed by hand methods without the use of power equipment, except that power equipment may be used if it is determined there are no utility facilities in the area of the proposed post holes.

Sign substrates for stationary mounted construction area signs may be fabricated from fiberglass reinforced plastic as specified under "Prequalified and Tested Signing and Delineation Materials" of these special provisions.

The Contractor may be required to cover certain signs during the progress of the work. Signs that are no longer required or that convey inaccurate information to the public shall be immediately covered or removed, or the information shall be corrected. Covers for construction area signs shall be of sufficient size and density to completely block out the complete face of the signs. The retroreflective face of the covered signs shall not be visible either during the day or at night. Covers shall be fastened securely so that the signs remain covered during inclement weather. Covers shall be replaced when they no longer cover the signs properly.

### 10-1.15 MAINTAINING TRAFFIC

Attention is directed to Sections 7-1.08, "Public Convenience," 7-1.09, "Public Safety," and 12, "Construction Area Traffic Control Devices," of the Standard Specifications and to the provisions in "Public Safety" of these special provisions and these special provisions. Nothing in these special provisions shall be construed as relieving the Contractor from the responsibilities specified in Section 7-1.09.

Lane closures shall conform to the provisions in section "Traffic Control System for Lane Closure" of these special provisions.

The Contractor shall close the local streets simultaneously. Closure of local streets are permitted between the hours of 10:00 pm and 5:00 am only for the erection and removal of falsework.

The Contractor shall notify the Engineer and Transportation Permit Office at least 15 days in advanced of any and each planned vertical or horizontal restrictions, such as falsework, lane or ramp/connector closure or reduction of lane or paved width. The Engineer shall submit a set of falsework plans to Transportation Permits Office for review.

At least 15 working days before any ramp or connector closure, the Contractor shall post a SC6 sign near or on it advising motorist of the times and dates of the closure.

No two consecutive entrance or exit ramps in the same direction of travel shall be closed at the same time, unless approved by the Engineer.

At locations where falsework pavement lighting are designated, falsework lighting shall be installed in conformance with the provisions in Section 86-6.11, "Falsewwork Lighting," of the Standard Specifications.

Portable Changeable Message Signs shall be furnished, placed operated and maintained for advanced lane closure notifications as specified elsewhere in these special provisions. Sign message(s) shall be as directed by the Engineer.

The stage construction/traffic handling plans depict the general work to be performed and the traveled way to be used for movements of traffic during each construction sequence. The Contractor shall be responsible for determining construction access and ingress/egress requirements and preparing a plan signed by a professional Civil Engineer registered in the State of California depicting access and ingress/egress points and associated barricades, crash cushions, temporary railing, signs and other devices required to prevent accidents or damage or injury to the public, for review and approval by the Engineer. Full compensation for conforming to this provision, including placement of such protection devices required by the Contractors access and ingress plan, shall be considered as included in the prices paid for the various contract items of work and no additional compensation will be allowed therefore.

At locations where falsework pavement lighting or pedestrian openings through falsework are designated, falsework lighting shall be installed in conformance with the provisions in Section 86-6.11, "Falsework Lighting," of the Standard Specifications.

Openings shall be provided through bridge falsework for the use of public traffic at each location where falsework is constructed over the streets or routes listed in the following table. The type, minimum width, height, and number of openings at each location, and the location and maximum spacing of falsework lighting, if required for each opening, shall conform to the requirements in the table. The width of vehicular openings shall be the clear width between temporary railings or other protective work. The spacing shown for falsework pavement lighting is the maximum distance center to center in meters between fixtures.

Wineville Road Undercrossing (Widen)
Bridge No. 56-0601

| | Number | Width | Height |
|---|---|---|---|
| Vehicle Openings | 1 | 9.6 | 4.6 |
| Pedestrian Openings | 2 | 1.5 | 2.4 |

| | Location | Spacing |
|---|---|---|
| Falsework Pavement Lighting | R & L | 9.0 Staggered ½ space |

(Width and Height in meters)
(R = Right side of traffic. L = Left side of traffic)
(C = Centered overhead)

Mira Loma Overhead (Widen)
Bridge No. 56-0602
(Structure Identification; i.e. Str. No.,
Street Name or Route No., etc)

| | Number | Width | Height |
|---|---|---|---|
| Vehicle Openings | | | |
| @ Span 1 | 1 | 10.4 | 4.6 |
| @ Span2 | 1 | 10.4 | 4.6 |

| | Location | Spacing |
|---|---|---|
| Falsework Pavement Lighting | R & L | 7.0 |

(Width and Height in meters)
(R = Right side of traffic. L = Left side of traffic)
(C = Centered overhead)

Etiwanda Ave Undercrossing (Widen)
Bridge No. 56-0603

| | Number | Width | Height |
|---|---|---|---|
| Vehicle Openings | 1 | 20.4 | 4.6 |
| Pedestrian Openings | 2 | 1.5 | 2.4 |

| | Location | Spacing |
|---|---|---|
| Falsework Pavement Lighting | R & L<br>C | 7.0<br>7.0<br>Staggered<br>½ space |

(Width and Height in meters)
(R = Right side of traffic. L = Left side of traffic)
(C = Centered overhead)

Campbell Street Undercrossing (Widen)
Bridge No. 56-0526
(Structure Identification; i.e. Str. No.,
Street Name or Route No., etc)

| | Number | Width | Height |
|---|---|---|---|
| Vehicle Openings | 1 | 9.6 | 4.6 |
| Pedestrian Openings | 2 | 1.5 | 2.4 |

| | Location | Spacing |
|---|---|---|
| Falsework Pavement Lighting | R & L | 9.0<br>Staggered<br>½ space |

(Width and Height in meters)
(R = Right side of traffic. L = Left side of traffic)
(C = Centered overhead)

Pyrite Street Undercrossing (Widen)
Bridge No. 56-0528
(Structure Identification; i.e. Str. No.,
Street Name or Route No., etc)

| | Number | Width | Height |
|---|---|---|---|
| Vehicle Openings @ Span 2 | 1 | 9.6 | 4.6 |
| Pedestrian Openings | 2 | 1.5 | 2.4 |

| | Location | Spacing |
|---|---|---|
| Falsework Pavement Lighting | R & L | 9.0 Staggered ½ space |

(Width and Height in meters)
(R = Right side of traffic. L = Left side of traffic)
(C = Centered overhead)

Camino Real Undercrossing (Widen)
Bridge No. 56-0661
(Structure Identification; i.e. Str. No.,
Street Name or Route No., etc)

| | Number | Width | Height |
|---|---|---|---|
| Vehicle Openings | 1 | 9.6 | 4.6 |

| | Location | Spacing |
|---|---|---|
| Falsework Pavement Lighting | R & L | 9.0 Staggered ½ space |

(Width and Height in meters)
(R = Right side of traffic. L = Left side of traffic)
(C = Centered overhead)

The exact location of openings will be determined by the Engineer.

Personal vehicles of the Contractor's employees shall not be parked on the traveled way or shoulders including any section closed to public traffic.

The Contractor shall notify local authorities and the Engineer in writing of the Contractor's intent to begin work at least 10 days before work is begun on city streets and when freeway and ramp closure will occur. The Contractor shall cooperate with local authorities relative to handling traffic through the area and shall make arrangements relative to keeping the working area clear of parked vehicles.

The Contractor shall provide a truck haul route for local agency approval 15 working days in advance of any need to haul material or equipment on public city streets.

Whenever vehicles or equipment are parked on the shoulder within 1.8 m of a traffic lane, the shoulder area shall be closed as shown on the plans.

Except as otherwise provided in these special provisions, freeway lanes, and ramps shall be closed only during the hours shown on the charts 1 through 4 included in this section "Maintaining Traffic." Except work required under Sections 7-1.08 and 7-1.09, work that interferes with public traffic shall be performed only during the hours shown for lane closures.

Advance notice signs (SC6-3 or SC6-4) shall be posted as directed by the Engineer, a minimum of 7 days prior to actual ramp closures. Advance notice signs shall be stationary signs.

The sign shall have a minimum dimension of 1219 mm by 1219 mm and shall conform to the requirements for portable signs as shown on plans.

The Contractor shall be responsible for maintaining accurate and timely information on the SC6-3 or SC6-4 signs. The SC6-3 or SC6-4 signs, when no longer required or when the information becomes outdated, shall be immediately covered or removed, or the sign message shall be updated.

Full compensation for furnishing, erecting, and maintaining advance notice signs, regardless of the number of times required, shall be considered as included in the contract lump sum price paid for construction area signs and no additional compensation will be allowed therefore.

Designated legal holidays are: January 1st, the third Monday in February, the last Monday in May, July 4th, the first Monday in September, November 11th, Thanksgiving Day, and December 25th. When a designated legal holiday falls on a Sunday, the following Monday shall be a designated legal holiday. When November 11th falls on a Saturday, the preceding Friday shall be a designated legal holiday. Also see "District 8 Special Events list" and "Table Z" in these special provisions.

Minor deviations from the requirements of this section concerning hours of work which do not significantly change the cost of the work may be permitted upon the written request of the Contractor, if in the opinion of the Engineer, public traffic will be better served and the work expedited. These deviations shall not be adopted by the Contractor until the Engineer has approved the deviations in writing. All other modifications will be made by contract change order.

**Chart No. 1**
**Multilane Lane Requirements**

Location: Riv 60 kp R 0.8-11.1 (wb) EA: 354804

| | a.m. | | | | | | | | | | | | p.m. | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| FROM HOUR TO HOUR | 12 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
| Mondays through Thursdays | 1 | 1 | 1 | 1 | 2 | | | | | | | | | | | | | | | | 2 | 2 | 1 | 1 | |
| Fridays | 1 | 1 | 1 | 1 | 2 | | | | | | | | | | | | | | | | 2 | 2 | 2 | 1 | |
| Saturdays | 1 | 1 | 1 | 1 | 1 | 2 | 2 | 2 | | | | | | | | | | | | | 2 | 2 | 2 | 2 | |
| Sundays | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 2 | 2 | 2 | | | | | | | | | | | | 2 | 2 | 1 | |
| Day before designated legal holiday | | | | | | | | | | | | | | | | | | | | | | | | | |
| Designated legal holidays | | | | | | | | | | | | | | | | | | | | | | | | | |

Legend:

| | |
|---|---|
| 1 | One lane open in direction of travel |
| 2 | Two adjacent lanes open in direction of travel |
| | No lane closure allowed |

REMARKS:

**1.** Closures may not be allowed during certain upcoming special events.

**2.** The closure starts with the first cone down and ends with the last cone picked up. No closure sign (S) shall be exposed to traffic more than 30 minutes before or after a closure, except as otherwise indicated in the special provisions.

**3.** The length of each closure shall not exceed 3 kilometers.

**4. In the same direction**, consecutive closures shall be not less than 2 kilometers apart and lanes shall be closed on the same side of the roadbed.

**Chart No. 2**
**Multilane Lane Requirements**

Location: Riv 60 kp R 0.8-11.1 (eb) EA: 354804

| | a.m. | | | | | | | | | | | | p.m. | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| FROM HOUR TO HOUR | 12 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
| Mondays through Thursdays | 1 | 1 | 1 | 1 | 1 | 2 | | | | | | | | | | | | | | | | | 2 | 2 | |
| Fridays | 1 | 1 | 1 | 1 | 1 | 2 | | | | | | | | | | | | | | | | | 2 | 2 | |
| Saturdays | 1 | 1 | 1 | 1 | 1 | 1 | 2 | 2 | | | | | | | | | | | | | | 2 | 2 | 2 | |
| Sundays | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 2 | 2 | | | | | | | | | | | | | 2 | 2 | |
| Day before designated legal holiday | | | | | | | | | | | | | | | | | | | | | | | | | |
| Designated legal holidays | | | | | | | | | | | | | | | | | | | | | | | | | |

Legend:

| | |
|---|---|
| 1 | One lane open in direction of travel |
| 2 | Two adjacent lanes open in direction of travel |
| | No lane closure allowed |

REMARKS:
**1.** Closures may not be allowed during certain upcoming special events.
**2.** The closure starts with the first cone down and ends with the last cone picked up. No closure sign (S) shall be exposed to traffic more than 30 minutes before or after a closure, except as otherwise indicated in the special provisions.
**3.** The length of each closure shall not exceed 3 kilometers.
**4. In the same direction**, consecutive closures shall be not less than 2 kilometers apart and lanes shall be closed on the same side of the roadbed.

**Chart No. 3**
**Ramp Lane Requirements**

Location: Riv 60 KP 2.41-11.43 (wb) EA: 354804

| | a.m. | | | | | | | | | | | | p.m. | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| FROM HOUR TO HOUR | 12 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
| Mondays through Thursdays | X | X | X | X | X | | | | | | | | | | | | | | | | X | X | X | X | |
| Fridays | X | X | X | X | X | | | | | | | | | | | | | | | | X | X | X | X | |
| Saturdays | X | X | X | X | X | X | X | X | | | | | | | | | | | | | X | X | X | X | |
| Sundays | X | X | X | X | X | X | X | X | X | X | | | | | | | | | | | | X | X | X | |
| Day before designated legal holiday | | | | | | | | | | | | | | | | | | | | | | | | | |
| Designated legal holidays | | | | | | | | | | | | | | | | | | | | | | | | | |

Legend:

| | |
|---|---|
| X | Ramp may be closed |
| | No work that interferes with public traffic will be allowed |

**Remarks:**
**1.** Closures may not be allowed during certain upcoming special events.
**2.** The closure starts with the first cone down and ends with the last cone picked up. No closure sign (S) shall be exposed to traffic more than 30 minutes before or after a closure, except as otherwise indicated in the special

provisions.
**3.** No two consecutive (on or off) ramps to be closed in each direction simultaneously.
**4.** In interchanges, only one onramp (and only in one direction) will be closed at any time period.

**Chart No. 4**
**Ramp Lane Requirements**

Location: Riv 60 KP 2.41-11.43 (eb) EA: 354804

| | a.m. | | | | | | | | | | | | p.m. | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| FROM HOUR TO HOUR | 12 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
| Mondays through Thursdays | X | X | X | X | X | X | | | | | | | | | | | | | | | | | X | X | |
| Fridays | X | X | X | X | X | X | | | | | | | | | | | | | | | | | X | X | |
| Saturdays | X | X | X | X | X | X | X | X | | | | | | | | | | | | | | X | X | X | |
| Sundays | X | X | X | X | X | X | X | X | X | X | | | | | | | | | | | | | X | X | |
| Day before designated legal holiday | | | | | | | | | | | | | | | | | | | | | | | | | |
| Designated legal holidays | | | | | | | | | | | | | | | | | | | | | | | | | |

Legend:

X Ramp may be closed

No work that interferes with public traffic will be allowed

REMARKS:
1. Closures may not be allowed during certain upcoming special events.
2. The closure starts with the first cone down and ends with the last cone picked up. No closure sign (S) shall be exposed to traffic more than 30 minutes before or after a closure, except as otherwise indicated in the special provisions.
3. No two consecutive (on or off) ramps to be closed in each direction simultaneously.
4. In interchanges, only one onramp (and only in one direction) will be closed at any time period.

**Table "Z"**

| District 8 Lane Closure Restrictions<br>For Designated Legal Holidays | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| If Holiday falls on | Thu | Fri | Sat | Sun | Mon | Tue | Wed | Thu | Fri | Sat | Sun | Mon |
| **Friday** | x | **H/SD**<br>xx | xx | xx | x | | | | | | | |
| **Saturday** | x | xx | **H/SD**<br>xx | xx | x | | | | | | | |
| **Sunday** | | x | xx | **H/SD**<br>xx | xx | | | | | | | |
| **Monday** | | x | xx | xx | **H/SD**<br>xx | x | | | | | | |
| **Tuesday** | | | | | x | **H/SD**<br>xx | | | | | | |
| **Wednesday** | | | | | | x | **H/SD**<br>xx | | | | | |
| **Thursday** | | | | | | | x | **H/SD**<br>xx | xx | xx | xx | x |

**H =** **Designated Legal Holiday**
January 1st, Third Monday in February, Last Monday in May, July 4th, First Monday in September, November 11th, Thanksgiving Day, December 25th

**SD =** **Special Day/Event**
**Days:** Include Martin Luther King Day, Lincoln's Birthday, Good Friday through Easter Sunday and December 26th through December 31st. **No closure** is allowed on these days.

**Events:** See District 8 Special Events List

| | |
|---|---|
| | Refer to Lane Closure Charts in the Special Provisions (if applicable) |
| x | **Preceding the designated Legal Holiday,** the full width of the traveled way shall be open for use by public traffic **after 6 am** |
| x | **Following the designated Legal Holiday**, the full width of the traveled way shall be open for use by public traffic **until 6 pm** |
| xx | The full width of the traveled way shall be open for use by public traffic at **all times.** **No lane closures** will be allowed. |

**District 8 Special Events List**

*No work that encroaches onto the traveled way of the affected Routes shall be allowed from 3 hours before to 2 hours following special events listed below unless otherwise permitted by the District Traffic Manager*

| Venue/Special Event | Affected Routes | Route Impact | Route Limits | Presently Identified The Month Of Events | Website | Contact # |
|---|---|---|---|---|---|---|
| Hyundai Pavilion | 215<br>15 | ***<br>** | University Pkwy to I-15/215 connector<br>I-60 to Devore Road | Various events May-Oct yearly See web site | www.hyundaipavilion.com | 909-880-6500 |
| Route 66 Rendezvous | 215 | ** | Mill St. to 5th St | September | www.route-66.org | 909-889-3980 |
| California Speedway | 10<br>15<br>210<br>66<br>60 | ***<br>***<br>***<br>***<br>*** | LA I-57 to SBD I-215<br>I-15/215 to SR-91<br>Haven to I-215<br>Haven to Cherry<br>I-15 to County Line | Various events Through the year See web site | www.californiaspeedway.com | 909-429-5000 |
| Temecula Balloon and Wine Festival | 15 | ** | SR-79 (Winchester Rd.) and Rancho California | June | www.tvbwf.com | 951-676-6713 |
| Bob Hope/Chrysler Classic | 10 | ** | Palm Springs off ramp at SR-111 | January | www.bhcc.com | 760-346-8184 |
| Kraft Nabisco Championship | 10 | ** | Palm Springs off ramp at SR-111 | March | www.nabiscochampionship.com | 760-324-4546 |
| Festival of Lights (Downtown Riverside) | 91 | ** | I-15 to I-215/SR-60 split | November | No website | 951-683-7100 |
| Orange Blossom Festival | 91 | ** | I-15 to I-215/SR-60 split | May | wwwobfa.org | 951-715-3400 |
| March Air Show March Air Reserve Base | 215 | *** | Cactus to Ramona Expway | April | No website | 909-655-1110 |
| UCR Graduation | 60<br>215 | ***<br>*** | I-215/SR-60/SR-91 split to I-215/SR-60 split | June | www.commencement.ucr.edu | 951-827-3144 |

**Note:** The dates of events change yearly. Contact numbers and websites provided to verify exact dates

** Designates-Moderate Impact (20 minute delay or less)
*** Designates-High Impact (30 minute delay or less)

Pedestrian access facilities shall be provided through construction areas within the right of way as shown on the plans and as specified herein. Pedestrian walkways shall be surfaced with asphalt concrete, portland cement concrete or timber. The surface shall be skid resistant and free of irregularities. Hand railings shall be provided on each side of pedestrian walkways as necessary to protect pedestrian traffic from hazards due to construction operations or adjacent vehicular traffic. Protective overhead covering shall be provided as necessary to insure protection from falling objects and drip from overhead structures.

In addition to the required openings through falsework, pedestrian facilities shall be provided during pile driving, footing, wall, and other bridge construction operations. At least one walkway shall be available at all times. If the Contractor's operations require the closure of one walkway, then another walkway shall be provided nearby, off the traveled roadway.

Railings shall be constructed of wood, S4S, and shall be painted white. Railings and walkways shall be maintained in good condition. Walkways shall be kept clear of obstructions.

Full compensation for providing pedestrian facilities shall be considered as included in the prices paid for the various contract items of work involved and no additional compensation will be allowed therefor.

Erection and removal of falsework at locations where falsework openings are required shall be undertaken one location at a time. During falsework erection and removal, public traffic in the lanes over which falsework is being erected or removed shall be detoured or stopped as specified in this section, "Maintaining Traffic." Falsework erection shall include adjustments or removal of components that contribute to the horizontal stability of the falsework system**.** Falsework removal shall include lowering falsework, blowing sand from sand jacks, turning screws on screw jacks, and removing wedges.

The Contractor shall have necessary materials and equipment on the site to erect or remove the falsework in any one spanor over any one opening before detouring or stopping public traffic.

## 10-1.16 CLOSURE REQUIREMENTS AND CONDITIONS

Lane closures shall conform to the provisions in "Maintaining Traffic" of these special provisions and these special provisions.

The term closure, as used herein, is defined as the closure of a traffic lane or lanes, including ramp or connector lanes, within a single traffic control system.

### CLOSURE SCHEDULE

By noon Monday, and at least 14 days prior to their intended use, the Contractor shall submit a written weekly schedule of lane closures. The weekly period is defined as Sunday noon through the following Sunday noon.

The closure schedule shall show the locations and times when the proposed closures are to be in effect, and show any proposed detours for ramp closures. The Contractor shall use the Closure Request forms furnished by the Engineer. Closure schedules submitted to the Engineer with incomplete, unintelligible or inaccurate information shall be returned for correction and resubmitted. The Contractor will be notified of disapproved closures or closures that require schedules will be made within 3 working days of their submittal.

The Closure Schedule shall show the locations and times when the proposed closures are to be in effect. The Contractor shall use the Closure Schedule request forms furnished by the Engineer. Closure Schedules submitted to the Engineer with incomplete, unintelligible or inaccurate information will be returned for correction and resubmittal. The Contractor will be notified of disapproved closures or closures that require coordination with other parties as a condition of approval.

Amendments to the Closure Schedule, including adding additional closures, shall be submitted to the Engineer, in writing, at least 3 working days in advance of a planned closure. Approval of amendments to the Closure Schedule will be at the discretion of the Engineer.

The Contractor shall confirm, in writing, all scheduled closures by no later than 8:00 a.m. 3 working days prior to the date on which the closure is to be made. Approval or denial of scheduled closures will be made no later than 4:00 p.m. 2 working days prior to the date on which the closure is to be made. Closures not confirmed or approved will not be allowed.

Confirmed closures that are cancelled due to unsuitable weather may be rescheduled at the discretion of the Engineer for the following working day.

### CONTINGENCY PLAN

The Contractor shall prepare a contingency plan for reopening closures to public traffic. The Contractor shall submit the contingency plan for a given operation to the Engineer within one working day of the Engineer's request.

The Contractor shall submit, within 10 days after beginning work as provided for in Section 8-1.03 of the Standard Specifications, or prior to performing any work requiring a lane closure, a contingency plan of the closure to public traffic.

The contingency plan shall include the critical point in each operation when the contingency plan shall be activated, if there is a failure in material, equipment, process or delay to public traffic exceeding 20 minutes. The plan shall identify the operation, equipment, processes and material that may fail or not operate and may cause the delay of the on time opening of the lane closure.

The Contractor shall indicate what alternative or additional equipment, material or workers will be necessary to ensure on-timing opening if one of the identified failures occurs. The alternative or additional equipment, material or workers shall be on site, be offsite in the possession of the Contractor or available through a third party. If the items are not on site the plan shall specify the location, the method for mobilizing the items and the time that it will take to complete the mobilization. The maximum time to complete the mobilization for off site items shall not exceed 30 minutes. The mobilization of the onsite items shall not exceed 20 minutes.

**LATE REOPENING OF CLOSURES**

If a closure is not reopened to public traffic by the specified time, work shall be suspended in conformance with the provisions in Section 8-1.05, "Temporary Suspension of Work," of the Standard Specifications. The Contractor shall not make any further closures until the Engineer has accepted a work plan, submitted by the Contractor, that will insure that future closures will be reopened to public traffic at the specified time. The Engineer will have 2 working days to accept or reject the Contractor's proposed work plan. The Contractor will not be entitled to any compensation for the suspension of work resulting from the late reopening of closures.

For each 15-minute interval, or fraction thereof past the time specified to reopen the closure, the Department will deduct $3,900 per interval from moneys due or that may become due the Contractor under the contract.

**COMPENSATION**

The Contractor shall notify the Engineer of any delay in the Contractor's operations due to the following conditions, and if, in the opinion of the Engineer, the Contractor's controlling operation is delayed or interfered with by reason of those conditions, and the Contractor's loss due to that delay could not have been avoided by rescheduling the affected closure or by judicious handling of forces, equipment and plant, the delay will be considered a right of way delay within the meaning of Section 8-1.09, "Right of Way Delays," and compensation for the delay will be determined in conformance with the provisions in Section 8-1.09:

A. The Contractor's proposed Closure Schedule is denied and his planned closures are within the time frame allowed for closures in "Maintaining Traffic" of these special provisions, except that the Contractor will not be entitled to any compensation for amendments to the Closure Schedule that are not approved.
B. The Contractor is denied a confirmed closure.

Should the Engineer direct the Contractor to remove a closure prior to the time designated in the approved Closure Schedule, any delay to the Contractor's schedule due to removal of the closure will be considered a right of way delay within the meaning of Section 8-1.09, "Right of Way Delays," and compensation for the delay will be determined in conformance with the provisions in Section 8-1.09.

**10-1.17 TRAFFIC CONTROL SYSTEM FOR LANE CLOSURE**

A traffic control system shall consist of closing traffic lanes and ramps in conformance with the details shown on the plans, the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications, the provisions under "Maintaining Traffic" and "Construction Area Signs" of these special provisions, and these special provisions.

The provisions in this section will not relieve the Contractor of responsibility for providing additional devices or taking measures as may be necessary to comply with the provisions in Section 7-1.09, "Public Safety," of the Standard Specifications.

During traffic stripe operations and pavement marker placement operations using bituminous adhesive, traffic shall be controlled, at the option of the Contractor, with either stationary or moving lane closures. During other operations, traffic shall be controlled with stationary lane closures. Attention is directed to the provisions in Section 84-1.04, "Protection From Damage," and Section 85-1.06, "Placement," of the Standard Specifications.

If components in the traffic control system are displaced or cease to operate or function as specified, from any cause, during the progress of the work, the Contractor shall immediately repair the components to the original condition or replace the components and shall restore the components to the original location.

**STATIONARY LANE CLOSURE**

When lane and ramp closures are made for work periods only, at the end of each work period, components of the traffic control system, except portable delineators placed along open trenches or excavation adjacent to the traveled way, shall be removed from the traveled way and shoulder. If the Contractor so elects, the components may be stored at selected central locations, designated by the Engineer within the limits of the highway right of way.

Each vehicle used to place, maintain and remove components of a traffic control system on multilane highways shall be equipped with a Type II flashing arrow sign which shall be in operation when the vehicle is being used for placing, maintaining or removing the components. Vehicles equipped with Type II flashing arrow sign not involved in placing, maintaining or removing the components when operated within a stationary type lane closure shall only display the caution display mode. The sign shall be controllable by the operator of the vehicle while the vehicle is in motion. The flashing arrow sign shown on the plans shall not be used on the vehicles which are doing the placing, maintaining and removing of components of a traffic control system and shall be in place before a lane closure requiring the sign's use is completed.

The 500-m section of a lane closure, shown along lane lines between the 300-m lane closure tapers on the plans entitled "Traffic Control System for Lane Closures on Freeways and Expressways" and "Traffic Control System for Lane and Complete Closures on Freeways and Expressways" shall not be used.

The traffic cones shown to be placed transversely across closed traffic lanes and shoulders on the plans entitled "Traffic Control System for Lane Closures on Freeways and Expressways" and "Traffic Control System for Lane and Complete Closures on Freeways and Expressways" shall not be placed.

**MOVING LANE CLOSURE**

Flashing arrow signs used in moving lane closures shall be truck-mounted. Changeable message signs used in moving lane closure operations shall conform to the provisions in Section 12-3.12, "Portable Changeable Message Signs," of the Standard Specifications, except the signs shall be truck-mounted and the full operation height of the bottom of the sign may be less than 2.1 m above the ground, but should be as high as practicable.

Truck-mounted attenuators (TMA) for use in moving lane closures shall be any of the following approved models, or equal:

A. Hexfoam TMA Series 3000, Alpha 1000 TMA Series 1000 and Alpha 2001 TMA Series 2001, manufactured by Energy Absorption Systems, Inc., One East Wacker Drive, Chicago, IL 60601-2076, Telephone (312) 467-6750.

   1. Distributor (northern): Traffic Control Service, Inc., 8585 Thys Court, Sacramento, CA 95828, Telephone (800) 884-8274, FAX (916) 387-9734.
   2. Distributor (southern): Traffic Control Service, Inc., 1881 Betmor Lane, Anaheim, CA 92805, Telephone (800) 222-8274.

B. Cal T-001 Model 2 or Model 3, manufacturer and distributor: Hexcel Corporation, 11711 Dublin Boulevard, P.O. Box 2312, Dublin, CA 94568, Telephone (925) 551-4900.

C. Renco Rengard Model Nos. CAM 8-815 and RAM 8-815, manufacturer and distributor: Renco Inc., 1582 Pflugerville Loop Road, P.O. Box 730, Pflugerville, TX 78660-0730, Telephone (800) 654-8182.

Each TMA shall be individually identified with the manufacturer's name, address, TMA model number, and a specific serial number. The names and numbers shall each be a minimum 13 mm high and located on the left (street) side at the lower front corner. The TMA shall have a message next to the name and model number in 13 mm high letters which states, "The bottom of this TMA shall be _____ mm ± _____ mm above the ground at all points for proper impact performance." Any TMA which is damaged or appears to be in poor condition shall not be used unless recertified by the manufacturer. The Engineer shall be the sole judge as to whether used TMAs supplied under this contract need recertification. Each unit shall be certified by the manufacturer to meet the requirements for TMA in conformance with the standards established by the Transportation Laboratory.

Approvals for new TMA designs proposed as equal to the above approved models shall be in conformance with the procedures (including crash testing) established by the Transportation Laboratory. For information regarding submittal of new designs for evaluation contact: Transportation Laboratory, 5900 Folsom Boulevard, Sacramento, California 95819.

New TMAs proposed as equal to approved TMAs or approved TMAs determined by the Engineer to need recertification shall not be used until approved or recertified by the Transportation Laboratory.

**PAYMENT**

The contract lump sum price paid for traffic control system shall include full compensation for furnishing all labor, materials (including signs), tools, equipment, and incidentals, and for doing all the work involved in placing, removing, storing, maintaining, moving to new locations, replacing and disposing of the components of the traffic control system shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

The adjustment provisions in Section 4-1.03, "Changes," of the Standard Specifications shall not apply to the item of traffic control system. Adjustments in compensation for traffic control system will be made only for increased or decreased traffic control system required by changes ordered by the Engineer and will be made on the basis of the cost of the increased or decreased traffic control necessary. The adjustment will be made on a force account basis as provided in Section 9-1.03, "Force Account Payment," of the Standard Specifications for increased work and estimated on the same basis in the case of decreased work.

Traffic control system required by work which is classed as extra work, as provided in Section 4-1.03D of the Standard Specifications, will be paid for as a part of the extra work.

## 10-1.18 TRAFFIC CONTROL SYSTEM FOR RAMP CLOSURES

At the times and locations specified under "Maintaining Traffic" of these special provisions, ramps shall be closed in conformance with the details shown on the plans, the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications, and these special provisions.

The provisions in this section will not relieve the Contractor of the responsibility to provide additional devices or take measures as may be necessary to comply with the provisions in Section 7-1.09, "Public Safety," of the Standard Specifications.

If components used for closing a ramp are displaced or cease to operate or function as specified, from any cause, during the progress of the work, the Contractor shall immediately repair the components to the original condition or replace the components and shall restore the components to the original location.

When ramp closures are made for work periods only, at the end of each work period, components used for the ramp closure, except portable delineators placed along open trenches or excavation adjacent to the traveled way, shall be removed from the traveled way and shoulder. If the Contractor so elects, the components may be stored at selected central locations designated by the Engineer within the limits of the highway right of way.

RAMP CLOSED signs (SC6-3) shall be used to inform motorists of the temporary closing of a freeway or expressway entrance or exit ramp for not more than one day.

The SC6-3 (CA) signs shall be installed at least 7 calendar days prior to closing the ramp, but not more than 14 days in advance of the ramp closure. The Contractor shall notify the Engineer not less than 2 calendar days prior to installing the SC6-3 (CA) signs. The SC6-3 (CA) signs shall be stationary mounted at locations shown on the plans and shall remain in place and visible to motorists during ramp closures.

The Contractor shall be responsible for maintaining accurate and timely information on the SC6-3 (CA) signs. The SC6-3 (CA) signs, when no longer required or when the information becomes outdated, shall be immediately covered or removed, or the sign message shall be updated.

Advanced ramp closed warning signs shall be used to inform motorist of the temporary closing of a freeway entrance or exit ramp. Detour signs shall be erected to direct motorist to other locations to enter or exit the freeway during the closure.

Full compensation for providing the ramp closures shown on the plans, including furnishing, installing, maintaining, covering, and removing SC6-3 (CA) signs, shall be considered as included in the contract prices paid for the various items of work involved and no separate payment will be made therefor.

## 10-1.19 TEMPORARY PAVEMENT DELINEATION

Temporary pavement delineation shall be furnished, placed, maintained, and removed in conformance with the provisions in Section 12-3.01, "General," of the Standard Specifications and these special provisions. Nothing in these special provisions shall be construed as reducing the minimum standards specified in the Manual on Uniform Traffic Control Devices (MUTCD), MUTCD California Supplement, or as relieving the Contractor from the responsibilities specified in Section 7-1.09, "Public Safety," of the Standard Specifications.

### GENERAL

Whenever the work causes obliteration of pavement delineation, temporary or permanent pavement delineation shall be in place prior to opening the traveled way to public traffic. Laneline or centerline pavement delineation shall be provided at all times for traveled ways open to public traffic. On multilane roadways (freeways and expressways) edgeline delineation shall be provided at all times for traveled ways open to public traffic.

The Contractor shall perform the work necessary to establish the alignment of temporary pavement delineation, including required lines or marks. Surfaces to receive temporary pavement delineation shall be dry and free of dirt and loose material. Temporary pavement delineation shall not be applied over existing pavement delineation or other temporary pavement delineation. Temporary pavement delineation shall be maintained until superseded or replaced with a new pattern of temporary pavement delineation or permanent pavement delineation.

Temporary pavement markers, including underlying adhesive, and removable traffic tape which are applied to the final layer of surfacing or existing pavement to remain in place or which conflicts with a subsequent or new traffic pattern for the area shall be removed when no longer required for the direction of public traffic, as determined by the Engineer.

### TEMPORARY LANELINE AND CENTERLINE DELINEATION

Whenever lanelines or centerlines are obliterated and temporary pavement delineation to replace the lines is not shown on the plans, the minimum laneline and centerline delineation to be provided for that area shall be temporary pavement markers placed at longitudinal intervals of not more than 7.3 m. The temporary pavement markers shall be the same color as the laneline or centerline the pavement markers replace. Temporary pavement markers shall be, permanent type markers listed, in "Prequalified and Tested Signing and Delineation Materials" of these special provisions. The temporary pavement markers shall be placed in conformance with the manufacturer's instructions. Temporary pavement markers for long term day/night use (6 months or less) shall be cemented to the surfacing with the adhesive recommended by the manufacturer,

except epoxy adhesive shall not be used to place the temporary pavement markers in areas where removal of the temporary pavement markers will be required.

Full compensation for furnishing, placing, maintaining, and removing the temporary pavement markers (including underlying adhesive, layout (dribble) lines to establish alignment of temporary pavement markers or used for temporary laneline and centerline delineation) for those areas where temporary laneline and centerline delineation is not shown on the plans and for providing equivalent patterns of permanent traffic lines for those areas when required, shall be considered as included in the contract prices paid for the items of work that obliterated the laneline and centerline pavement delineation and no separate payment will be made therefor. The removal quantities for the final stage or construction is shown on the permanent pavement delineation plans.

**TEMPORARY EDGELINE DELINEATION**

On multilane roadways (freeways and expressways), whenever edgelines are obliterated and temporary pavement delineation to replace those edgelines is not shown on the plans, the edgeline delineation to be provided for those areas adjacent to lanes open to public traffic shall be as follows:

A. Temporary pavement delineation for right edgelines shall, at the option of the Contractor, consist of either a solid 100-mm wide traffic stripe of the same color as the stripe the temporary edgeline delineation replaces, or traffic cones, portable delineators or channelizers placed at longitudinal intervals not to exceed 30 m.
B. Temporary pavement delineation for left edgelines shall, at the option of the Contractor, consist of either solid 100-mm wide traffic stripe of the same color as the stripe the temporary edgeline delineation replaces, traffic cones, portable delineators or channelizers placed at longitudinal intervals not to exceed 30 m or temporary pavement markers placed at longitudinal intervals of not more than 1.8 m. Temporary pavement markers used for temporary left edgeline delineation shall be permanent type pavement markers listed or long term day/night use (6 months or less) in "Prequalified and Tested Signing and Delineation Materials" of these special provisions.

Where removal of the 100-mm wide traffic stripe will not be required, painted traffic stripe conforming to the provisions of "Temporary Traffic Stripe (Paint)" of these special provisions may be used. The quantity of temporary traffic stripe (Paint) or temporary traffic stripe (paint) used for this temporary edgeline delineation will not be included in the quantities of paint to be paid for.

The lateral offset for traffic cones, portable delineators or channelizers used for temporary edgeline delineation shall be as determined by the Engineer. If traffic cones or portable delineators are used as temporary pavement delineation for edgelines, the Contractor shall provide personnel to remain at the project site to maintain the cones or delineators during the hours of the day that the portable delineators are in use.

Channelizers used for temporary edgeline delineation shall be the surface mounted type and shall be orange in color. Channelizer bases shall be cemented to the pavement in the same manner provided for cementing pavement markers to pavement in "Pavement Markers" of these special provisions, except epoxy adhesive shall not be used to place channelizers on the top layer of pavement. Channelizers shall be, at the Contractor's option, one of the surface mount types (900 mm) listed in "Prequalified and Tested Signing and Delineation Materials" of these special provisions.

Temporary edgeline delineation shall be removed when no longer required for the direction of public traffic as determined by the Engineer.

The quantity of channelizers used as temporary edgeline delineation will not be included in the quantity of channelizers to be paid for. Full compensation for furnishing, placing, maintaining and removing temporary edgeline delineation for those areas where temporary edgeline delineation is not shown on the plans shall be considered as included in the contract prices paid for the items of work that obliterated the edgeline pavement delineation and no separate payment will be made therefor.

Temporary painted traffic stripe shall conform to the provisions in "Paint Traffic Stripes and Pavement Markings" of these special provisions except for payment.

**MEASUREMENT AND PAYMENT**

Temporary traffic stripe (paint) and temporary pavement marking (paint) will be measured and paid for in the same manner specified for paint traffic stripe (2-coat) and paint pavement marking (2-coat) in Section 84-3.06, "Measurement," and Section 84-3.07, "Payment," of the Standard Specifications.

Temporary pavement markers, permanent type,shown on the plans, will be measured and paid for by the unit in the same manner specified for retroreflective pavement markers in Section 85-1.08, "Measurement," and Section 85-1.09, "Payment," of the Standard Specifications. Temporary pavement markers used for temporary laneline and centerline delineation for areas which are not shown on the plans will not be included in the quantities of pavement markers to be paid for. Full compensation for removing temporary pavement markers, when no longer required, shall be considered as included in the contract unit price paid for pavement marker and no separate payment will be made therefor.

## 10-1.20 BARRICADE

Barricades shall be furnished, placed and maintained at the locations shown on the plans, specified in the Standard Specifications or in these special provisions or where designated by the Engineer. Barricades shall conform to the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

Attention is directed to "Prequalified and Tested Signing and Delineation Materials" of these special provisions regarding retroreflective sheeting for barricades.

Construction area sign and marker panels conforming to the provisions in Section 12-3.06, "Construction Area Signs," of the Standard Specifications shall be installed on barricades in a manner determined by the Engineer at the locations shown on the plans.

Sign panels for construction area signs and marker panels installed on barricades shall conform to the provisions in Section 12-3.06A, "Stationary Mounted Signs," of the Standard Specifications.

Full compensation for furnishing, installing, maintaining, and removing construction area signs and marker panels on barricades shall be considered as included in the contract unit price paid for the type of barricade involved and no separate payment will be made therefor.

Barricades shown on the plans as part of a traffic control system will be paid for as provided in "Traffic Control System for Lane Closure" of these special provisions and will not be included in the count for payment of barricades.

## 10-1.21 FLASHING ARROW SIGN

Flashing arrow signs shall be furnished, placed, operated, and maintained at those locations shown on the plans or where designated by the Engineer in conformance with the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

At the end of each night's work, flashing arrow sign units shall be left in operation if required for traffic handling or be removed from the traveled way if ordered by the Engineer. If the Contractor so elects, the flashing arrow sign units may be stored at selected central locations designated by the Engineer within the limits of the highway right of way. Full compensation for placing, maintaining in continuous operation, removing and storing flashing arrow sign units as the work progresses shall be considered as included in the contract unit price paid for flashing arrow signs and no additional compensation will be allowed therefor.

The quantity of flashing arrow signs to be paid for will be measured by the unit as determined from actual count in place at the locations shown on the plans or at other locations designated by the Engineer. Each flashing arrow sign will be counted once at each location shown on the plans or at other locations determined by the Engineer. Repaired or replacement flashing arrow signs placed at the locations will not be considered as additional units for payment purposes. Flashing arrow signs shown on the plans as part of a traffic control system shall be considered as part of that traffic control system and will be paid for in conformance with the provisions in "Traffic Control System for Lane Closures" of these special provisions.

The contract unit price paid for flashing arrow signs shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing, placing, operating, maintaining, repairing, replacing, and removing flashing arrow signs, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

## 10-1.22 PORTABLE CHANGEABLE MESSAGE SIGN

Portable changeable message signs shall be furnished, placed, operated, and maintained at those locations shown on the plans or where designated by the Engineer in conformance with the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

Attention is directed to "Maintaining Traffic" of these special provisions regarding the use of the portable changeable message signs.

The message(s) on each of the signs shall be as directed by the Engineer.

## 10-1.23 TEMPORARY RAILING

Temporary railing (Type K) shall be placed as shown on the plans, as specified in the Standard Specifications or these special provisions or where ordered by the Engineer and shall conform to the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

Reflectors on temporary railing (Type K) shall conform to the provisions in "Prequalified and Tested Signing and Delineation Materials" of these special provisions.

Temporary railing (Type K), conforming to the details shown on Standard Plan T3 may be used. Temporary railing (Type K) fabricated prior to January 1, 1993, and conforming to 1988 Standard Plan B11-30 may be used, provided the fabrication date is printed on the required Certificate of Compliance and vertical holes are not drilled in the top of the temporary railing to secure temporary traffic screen to the temporary railing.

Attention is directed to "Public Safety" and "Order of Work" of these special provisions.

Temporary railing (Type K) placed in conformance with the provisions in "Public Safety" of these special provisions will be neither measured nor paid for.

The existing concrete barrier (Type K) to be relocated as shown on the plans shall be considered as included in the contract price paid per meter for relocate concrete harrier (Type K) and no additional compensation will he allowed therefore. The relocated existing concrete harrier (Type K) shall become the property of the Contractor.

**10-1.24 CHANNELIZER**

Channelizers (surface mounted) shall conform to the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

Channelizers (surface mounted) shall conform to the provisions in "Prequalified and Tested Signing and Delineation Materials" of these special provisions.

When no longer required for the work as determined by the Engineer, channelizers and underlying adhesive used to cement the channelizer bases to the pavement shall be removed. Removed channelizers and adhesive shall become the property of the Contractor and shall be removed from the site of work.

**10-1.25 CONES AND DELINEATORS**

Cones and delineators shall conform to the provisions in "Prequalified and Tested Signing and Delineation Materials" of these special provisions.

Full compensation for cones and delineators shown on the stage construction/traffic handling plans shall be considered as included in the contract price paid for traffic control system and no separate compensation will be allowed therefor.

**10-1.26 TEMPORARY TRAFFIC SCREEN**

Temporary traffic screen shall be furnished, installed, and maintained on top of temporary railing (Type K) at the locations designated on the plans, specified in the special provisions or directed by the Engineer and shall conform to the provisions specified for traffic handling equipment and devices in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

Temporary traffic screen panels shall be new or used CDX Grade, or better, plywood or weather resistant strandboard mounted and anchored on temporary railing (Type K). Wale boards shall be new or used Douglas fir, rough sawn, Construction Grade, or better. Pipe screen supports shall be new or used galvanized steel pipe, Schedule 40. Nuts, bolts, and washers shall be cadmium plated. Screws shall be black or cadmium plated flat head, cross slotted screws with full thread length.

When no longer required, as determined by the Engineer, temporary traffic screen shall be removed from the site of the work and shall become the property of the Contractor.

Temporary traffic screen will be measured by the meter from actual measurements along the line of the completed temporary traffic screen, at each location designated on the plans, specified or directed by the Engineer. If the Engineer orders a lateral move of temporary railing, with temporary traffic screen attached, and the repositioning is not shown on the plans, moving the temporary traffic screen will be paid for as part of the extra work for moving the temporary railing as specified in Section 12-4.01, "Measurement and Payment," of the Standard Specifications. Temporary traffic screen placed in excess of the length shown, specified or directed by the Engineer will not be paid for.

The contract price paid per meter for temporary traffic screen shall include full compensation for furnishing all labor, materials (including anchoring systems), tools, equipment, and incidentals, and for doing all the work involved in installing, maintaining, and removing the temporary traffic screen, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

**10-1.27 TEMPORARY CRASH CUSHION MODULE**

This work shall consist of furnishing, installing, and maintaining sand filled temporary crash cushion modules in groupings or arrays at each location shown on the plans, as specified in these special provisions or where designated by the Engineer. The grouping or array of sand filled modules shall form a complete sand filled temporary crash cushion in conformance with the details shown on the plans and these special provisions.

Attention is directed to "Public Safety", "Order of Work", and "Temporary Railing" of these special provisions.

Whenever the work or the Contractor's operations establishes a fixed obstacle, the exposed fixed obstacle shall be protected with a sand filled temporary crash cushion. The sand filled temporary crash cushion shall be in place prior to opening the lanes adjacent to the fixed obstacle to public traffic.

Sand filled temporary crash cushions shall be maintained in place at each location, including times when work is not actively in progress. Sand filled temporary crash cushions may be removed during a work period for access to the work provided that the exposed fixed obstacle is 4.6 m or more from a lane carrying public traffic and the temporary crash cushion is reset to protect the obstacle prior to the end of the work period in which the fixed obstacle was exposed. When no longer required, as determined by the Engineer, sand filled temporary crash cushions shall be removed from the site of the work.

At the Contractor's option, the modules for use in sand filled temporary crash cushions shall be either Energite III Inertial Modules, Fitch Inertial Modules or TrafFix Sand Barrels manufactured after March 31, 1997, or equal:

A. Energite III and Fitch Inertial Modules, manufactured by Energy Absorption Systems, Inc., One East Wacker Drive, Chicago, IL 60601-2076. Telephone 1-312-467-6750, FAX 1-800-770-6755

   1. Distributor (North): Traffic Control Service, Inc., 8585 Thys Court, Sacramento, CA 95828. Telephone 1-800-884-8274, FAX 1-916-387-9734
   2. Distributor (South): Traffic Control Service, Inc., 1881 Betmor Lane, Anaheim, CA 92805. Telephone 1-800-222-8274, FAX 1-714-937-1070

B. TrafFix Sand Barrels, manufactured by TrafFix Devices, Inc., 220 Calle Pintoresco, San Clemente, CA 92672. Telephone 1-949 361-5663, FAX 1-949 361-9205

   1. Distributor (North): United Rentals, Inc., 1533 Berger Drive, San Jose, CA 95112. Telephone 1-408 287-4303, FAX 1-408 287-1929
   2. Distributor (South): Statewide Safety & Sign, Inc., P.O. Box 1440, Pismo Beach, CA 93448. Telephone 1-800-559-7080, FAX 1-805 929-5786

Modules contained in each temporary crash cushion shall be of the same type at each location. The color of the modules shall be the standard yellow color, as furnished by the vendor, with black lids. The modules shall exhibit good workmanship free from structural flaws and objectionable surface defects. The modules need not be new. Good used undamaged modules conforming to color and quality of the types specified herein may be utilized. If used Fitch modules requiring a seal are furnished, the top edge of the seal shall be securely fastened to the wall of the module by a continuous strip of heavy duty tape.

Modules shall be filled with sand in conformance with the manufacturer's directions, and to the sand capacity in kilograms for each module shown on the plans. Sand for filling the modules shall be clean washed concrete sand of commercial quality. At the time of placing in the modules, the sand shall contain not more than 7 percent water as determined by California Test 226.

Modules damaged due to the Contractor's operations shall be repaired immediately by the Contractor at the Contractor's expense. Modules damaged beyond repair, as determined by the Engineer, due to the Contractor's operations shall be removed and replaced by the Contractor at the Contractor's expense.

Temporary crash cushion modules shall be placed on movable pallets or frames conforming to the dimensions shown on the plans. The pallets or frames shall provide a full bearing base beneath the modules. The modules and supporting pallets or frames shall not be moved by sliding or skidding along the pavement or bridge deck.

A Type R or P marker panel shall be attached to the front of the crash cushion as shown on the plans, when the closest point of the crash cushion array is within 3.6 m of the traveled way. The marker panel, when required, shall be firmly fastened to the crash cushion with commercial quality hardware or by other methods determined by the Engineer.

At the completion of the project, temporary crash cushion modules, sand filling, pallets or frames, and marker panels shall become the property of the Contractor and shall be removed from the site of the work. Temporary crash cushion modules shall not be installed in the permanent work.

Temporary crash cushion modules will be measured by the unit as determined from the actual count of modules used in the work or ordered by the Engineer at each location. Temporary crash cushion modules placed in conformance with the provisions in "Public Safety" of these special provisions and modules placed in excess of the number specified or shown will not be measured nor paid for.

Repairing modules damaged by public traffic will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications. Modules damaged beyond repair by public traffic, when ordered by the Engineer, shall be removed and replaced immediately by the Contractor. Modules replaced due to damage by public traffic will be measured and paid for as temporary crash cushion module.

If the Engineer orders a lateral move of the sand filled temporary crash cushions and the repositioning is not shown on the plans, moving the sand filled temporary crash cushion will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications and these temporary crash cushion modules will not be counted for payment in the new position.

The contract unit price paid for temporary crash cushion module shall include full compensation for furnishing all labor, materials (including sand, pallets or frames and marker panels), tools, equipment, and incidentals, and for doing all the work involved in furnishing, installing, maintaining, moving, and resetting during a work period for access to the work, and removing from the site of the work when no longer required (including those damaged by public traffic) sand filled temporary crash cushion modules, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

## 10-1.28 EXISTING HIGHWAY FACILITIES

The work performed in connection with various existing highway facilities shall conform to the provisions in Section 15, "Existing Highway Facilities," of the Standard Specifications and these special provisions.

### REMOVE BRIDGE RAILING

Existing bridge railing, where shown on the plans to be removed, shall be removed and disposed of.

Existing concrete anchors or steel foundation tubes shall be completely removed and disposed of. Full compensation for removing concrete anchors and backfilling of the postholes shall be considered as included in the contract price paid per meter for remove bridge railing and no separate payment will be made therefor.

Full compensation for removing cable anchor assemblies, terminal anchor assemblies or steel foundation tubes shall be considered as included in the contract price paid per meter for remove bridge railing and no separate payment will be made therefor.

### REMOVE METAL BEAM GUARD RAILING

Existing metal beam guard railing, where shown on the plans to be removed, shall be removed and disposed of.

Existing concrete anchors or steel foundation tubes shall be completely removed and disposed of. Full compensation for removing concrete anchors shall be considered as included in the contract price paid per meter for remove metal beam guard railing and no separate payment will be made therefor.

Full compensation for removing cable anchor assemblies, terminal anchor assemblies or steel foundation tubes shall be considered as included in the contract price paid per meter for remove metal beam guard railing and no separate payment will be made therefor.

### REMOVE SIGN STRUCTURE

Existing sign structures, where shown on the plans to be removed, shall be removed and become the property of the Contractor.

Overhead sign structure removal shall consist of removing posts, frames, portions of foundations, sign panels, walkways with safety railings, and sign lighting electrical equipment.

A sign structure shall not be removed until the structure is no longer required for the direction of public traffic.

Concrete foundations may be abandoned in place, except that the top portion, including anchor bolts, reinforcing steel, and conduits shall be removed to a depth of not less than 1 m below the adjacent finished grade. The resulting holes shall be backfilled and compacted with material equivalent to the surrounding material.

Electrical wiring shall be removed to the nearest pull box. Fuses within spliced connections in the pull box shall be removed and become the property of the Contractor.

Electrical equipment, where shown on the plans, shall be removed and become the property of the Contractor.

### REMOVE PAVEMENT MARKER

Existing pavement markers, including underlying adhesive, when no longer required for traffic lane delineation as determined by the Engineer, shall be removed and disposed of.

Full compensation for removing and disposing of pavement markers and underlying adhesive shall be considered as included in the contract unit price paid for "Remove Pavement Markers" and no separate payment will be made therefor.

### REMOVE TRAFFIC STRIPE AND PAVEMENT MARKING

Removal quantities are shown on the project stage construction and permanent pavement delineation quantities plans.

Traffic stripe and pavement marking shall be removed at the locations shown on the plans and as directed by the Engineer.

Attention is directed to "Water Pollution Control" of these special provisions.

Waste from removal of yellow thermoplastic and yellow painted traffic stripe and pavement marking contains lead chromate in average concentrations greater than or equal to 5 mg/L Soluble Lead or 1000 mg/kg Total Lead. Yellow thermoplastic and yellow painted traffic stripe and pavement marking exist in the entire project limits. Residue produced from when yellow thermoplastic and yellow paint are removed may contain heavy metals in concentrations that exceed thresholds established by the California Health and Safety Code and may produce toxic fumes when heated.

The removed yellow thermoplastic and yellow paint shall be disposed of at a Class 1 disposal facility in conformance with the requirements of the disposal facility operator within 60 days after accumulating 100 kg of residue and dust. The Contractor shall make necessary arrangements with the operator of the disposal facility to test the yellow thermoplastic and yellow paint residue as required by the facility and these special provisions. Testing shall include, at a minimum, (1) Total Lead and Chromium by EPA Method 7000 series and (2) Soluble Lead and Chromium by California Waste Extraction Test.

From the first 3360 L of waste or portion thereof, if less than 3360 L of waste are produced, a minimum of four randomly selected samples shall be taken and analyzed. From each additional 840 L of waste or portion thereof, if less than 840 L are produced, a minimum of one additional random sample shall be taken and analyzed. The Contractor shall submit the name and location of the disposal facility and analytical laboratory along with the testing requirements to the Engineer not less than 5 days prior to the start of removal of yellow thermoplastic and yellow painted traffic stripe and pavement marking. The analytical laboratory shall be certified by the Department of Health Services Environmental Laboratory Accreditation Program. Test results shall be provided to the Engineer for review prior to signing a waste profile as requested by the disposal facility, prior to issuing an EPA identification number, and prior to allowing removal of the waste from the site.

The Contractor shall prepare a project specific Lead Compliance Plan to prevent or minimize worker exposure to lead while handling removed yellow thermoplastic and yellow paint residue. Attention is directed to Title 8, California Code of Regulations, Section 1532.1, "Lead," for specific Cal-OSHA requirements when working with lead.

The Lead Compliance Plan shall contain the elements listed in Title 8, California Code of Regulations, Section 1532.1(e)(2)(B). Before submission to the Engineer, the Lead Compliance Plan shall be approved by an Industrial Hygienist certified in Comprehensive Practice by the American Board of Industrial Hygiene. The Plan shall be submitted to the Engineer at least 7 days prior to beginning removal of yellow thermoplastic and yellow paint.

Prior to removing yellow thermoplastic and yellow painted traffic stripe and pavement marking, personnel who have no prior training, including State personnel, shall complete a safety training program provided by the Contractor that meets the requirements of Title 8, California Code of Regulations, Section 1532.1, "Lead," and the Contractor's Lead Compliance Program.

Personal protective equipment, training, and washing facilities required by the Contractor's Lead Compliance Plan shall be supplied to State personnel by the Contractor. The number of State personnel will be 4.

Where grinding or other methods approved by the Engineer are used to remove yellow thermoplastic and yellow painted traffic stripe and pavement marking, the removed residue, including dust, shall be contained and collected immediately. Sweeping equipment shall not be used. Collection shall be by a high efficiency particulate air (HEPA) filter equipped vacuum attachment operated concurrently with the removal operations or other equally effective methods approved by the Engineer. The Contractor shall submit a written work plan for the removal, storage, and disposal of yellow thermoplastic and yellow painted traffic stripe and pavement marking to the Engineer for approval not less than 15 days prior to the start of the removal operations. Removal operations shall not be started until the Engineer has approved the work plan.

The removed yellow thermoplastic and yellow painted traffic stripe and pavement marking residue shall be stored and labeled in covered containers. Labels shall conform to the provisions of Title 22, California Code of Regulations, Sections 66262.31 and 66262.32. Labels shall be marked with date when the waste is generated, the words "Hazardous Waste", composition and physical state of the waste (for example, asphalt grindings with thermoplastic or paint), the word "Toxic", the name and address of the Engineer, the Engineer's telephone number, contract number, and Contractor or subcontractor. The containers shall be a type approved by the United States Department of Transportation for the transportation and temporary storage of the removed residue. The containers shall be handled so that no spillage will occur. The containers shall be stored in a secured enclosure at a location within the project limits until disposal, as approved by the Engineer.

If the yellow thermoplastic and yellow painted traffic stripe and pavement marking residue is transported to a Class 1 disposal facility, a manifest shall be used, and the transporter shall be registered with the California Department of Toxic Substance Control. The Engineer will obtain the United States Environmental Protection Agency Identification Number and sign all manifests as the generator within 2 working days of receiving sample test results and approving the test methods.

The Contractor shall assume that the yellow paint removed is not regulated under the Federal Resource Conservation and Recovery Act (RCRA). Additional disposal costs for removal residue regulated under RCRA, as determined by test results required by the disposal facility, will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications.

Nothing in these special provisions shall relieve the Contractor of the Contractor's responsibilities as specified in Section 7-1.09, "Public Safety," of the Standard Specifications.

Attention is directed to "Material Containing Aerially Deposited Lead" of these special provisions regarding payment for the Lead Compliance Plan.

Full compensation for providing a written work plan for the removal, storage, and disposal of yellow painted traffic stripe and pavement marking shall be considered as included in the contract items paid per meter for remove yellow painted traffic stripe and no separate payment will be made therefor.

**ABANDON CULVERT**

Existing culverts and utility pipelines, where shown on the plans to be abandoned, shall be abandoned in place or, at the option of the Contractor, the culverts and pipelines shall be removed and disposed of. Resulting openings into existing structures that are to remain in place shall be plugged with commercial quality concrete containing not less than 300 kg of cement per cubic meter.

Abandoning culverts and pipelines in place shall conform to the following:

A. Culverts and pipelines that intersect the side slopes shall be removed to a depth of not less than one meter measured normal to the plane of the finished side slope, before being abandoned.
B. Culverts and pipelines 300 mm in diameter and larger, shall, at the Contractor's option, be backfilled with either sand, controlled low strength material or slurry cement backfill conforming to the provisions in Section 19-3.062, "Slurry Cement Backfill," of the Standard Specifications by any method acceptable to the Engineer that completely fills the pipe. Sand backfill material shall be clean, free draining, and free from roots and other deleterious substances.
C. The ends of culverts and pipelines shall be securely closed by a 150 mm thick tight fitting plug or wall of commercial quality concrete.

Culverts and pipelines shall not be abandoned until their use is no longer required. The Contractor shall notify the Engineer in advance of any intended culvert or pipeline abandonment.

Full compensation for concrete plugs, pipe removal, structure excavation, and backfill (including sand, controlled low strength material or slurry cement backfill) shall be considered as included in the contract unit price paid for each abandon culvert and no additional compensation will be allowed therefor.

**REMOVE SIGN STRUCTURE**

Existing sign structures, where shown on the plans to be removed, shall be removed and disposed of.

Overhead sign structure removal shall consist of removing posts, frames, portions of foundations, sign panels, walkways with safety railings, and sign lighting electrical equipment.

A sign structure shall not be removed until the structure is no longer required for the direction of public traffic.

Concrete foundations may be abandoned in place, except that the top portion, including anchor bolts, reinforcing steel, and conduits shall be removed to a depth of not less than 1 m below the adjacent finished grade. The resulting holes shall be backfilled and compacted with material equivalent to the surrounding material.

Electrical wiring shall be removed to the nearest pull box. Fuses within spliced connections in the pull box shall be removed and become the property of the Contractor.

Electrical equipment, where shown on the plans, shall be removed and become the property of the Contractor.

**REMOVE PAVEMENT MARKER**

Existing pavement markers, including underlying adhesive, when no longer required for traffic lane delineation as determined by the Engineer, shall be removed and disposed of.

Full compensation for removing and disposing of pavement markers and underlying adhesive shall be considered as included in the contract unit price paid for "Remove Pavement Markers" and no separate payment will be made therefor.

**REMOVE DRAINAGE FACILITY**

Existing culverts, inlets, headwalls and endwalls, where any portion of these structures is within one meter of the grading plane in excavation areas, or within 0.3-m of original ground in embankment areas, or where shown on the plans to be removed, shall be completely removed and disposed of.

**REMOVE ASPHALT CONCRETE DIKE**

Existing asphalt concrete dike, where shown on the plans to be removed, shall be removed.

Prior to removing the dike, the outside edge of the asphalt concrete to remain in place shall be cut on a neat line to a minimum depth of 50 mm.

The dike shall be removed in such a manner that the surfacing which is to remain in place is not damaged.

The dike shall be disposed of outside the highway right of way in conformance with the provisions in Section 7-1.13 of the Standard Specifications.

**REMOVE ROADSIDE SIGN**

Existing roadside signs, (wood posts, panel, barrier mounted) at those locations shown on the plans to be removed, shall be removed and become the property of the Contractor.

Sign panels shown on the plans shall be removed and become the property of the Contractor.

Existing roadside signs shall not be removed until replacement signs have been installed or until the existing signs are no longer required for the direction of public traffic, unless otherwise directed by the Engineer.

Full compensation for removing roadside sign (wood post, panel, barrier mounted) shall be paid as units determined from actual count of the sign in place.

**RECONSTRUCT SIGN STRUCTURE**

Reconstructing sign structures shall consist of removing and reconstructing existing sign structures at the new locations shown on the plans.

The locations of reconstruct sign structure are as follows:

Location A
Etiwanda Ave Undercrossing (Widen)
(Bridge No. 56-0603)

Location B
Pyrite Street Undercrossing (Widen)
(Bridge No. 56-0528)

Sign lighting electrical work is provided for in Section 10-3, "Signals, Lighting And Electrical Systems," of these special provisions.

New metal components required to reconstruct sign structures shall conform to the requirements in Section 75, "Miscellaneous Metal," of the Standard Specifications.

The edges of any existing metal which are cut and the inside of all drilled holes shall be painted with 2 applications of unthinned zinc-rich primer conforming to the provisions in Section 91, "Paint," of the Standard Specifications.

Full compensation for installing new metal components and painting cuts and drilled holes with primer shall be considered as included in the contract unit??????? price paid for reconstruct sign structure and no separate payment will be made therefor.

**REMOVE CHAIN LINK FENCE**

Existing chain link fence, at the locations shown on the plans, shall be removed and disposed of.

Full compensation for removing and disposing of excess fence shall be considered as included in the contract price paid per meter for remove chain link fence and no separate payment will be made therefor.

**REMOVE TREES**

Existing trees where shown on the plans to be removed, shall be removed and disposed of outside the highway right of way in accordance with Section 7 -1.13 "Disposal of Material Outside the Highway Right of Way," and Section 16 "Clearing and Grubbing" of the Standard Specifications and these special provisions.

Trees to be removed shall be removed prior to performing any roadwork in the vicinity of such trees. Tree removal shall include removing existing tree roots to a depth of 1 meter below ground level, sterilization of the remaining soil, and backfilling to the existing ground level.

Soil shall be sterilized with one of the following pesticides applied at the maximum label rate unless otherwise directed by the Engineer:

- Trifluralin emulsifiable concentrate.
- Dichlobenil.

Pesticide shall be mixed according to the manufacturer's recommendations and shall beapplied by a device approved by the Engineer. Pesticides shall not be applied more than 300 mm outside removal areas.

The contract unit price paid for remove tree shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in removing tree, including excavation and backfill of the removal area, furnishing and applying soil sterilant, and disposal of the tree trunks, branches, leaves and roots, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer .

**COLD PLANE ASPHALT CONCRETE PAVEMENT**

Existing asphalt concrete pavement shall be cold planed at the locations and to the dimensions shown on the plans.

Planing asphalt concrete pavement shall be performed by the cold planing method. Planing of the asphalt concrete pavement shall not be done by the heater planing method.

Cold planing machines shall be equipped with a cutter head not less than 750 mm in width and shall be operated so that no fumes or smoke will be produced. The cold planing machine shall plane the pavement without requiring the use of a heating device to soften the pavement during or prior to the planing operation.

The depth, width, and shape of the cut shall be as shown on the typical cross sections or as designated by the Engineer. The final cut shall result in a uniform surface conforming to the typical cross sections. The outside lines of the planed area shall be neat and uniform. Planing asphalt concrete pavement operations shall be performed without damage to the surfacing to remain in place.

Planed widths of pavement shall be continuous except for intersections at cross streets where the planing shall be carried around the corners and through the conform lines. Following planing operations, a drop-off of more than 45 mm will not be allowed between adjacent lanes open to public traffic.

Where transverse joints are planed in the pavement at conform lines no drop-off shall remain between the existing pavement and the planed area when the pavement is opened to public traffic. If asphalt concrete has not been placed to the level of existing pavement before the pavement is to be opened to public traffic a temporary asphalt concrete taper shall be constructed. Asphalt concrete for temporary tapers shall be placed to the level of the existing pavement and tapered on a slope of 1:30 (Vertical: Horizontal) or flatter to the level of the planed area.

Asphalt concrete for temporary tapers shall be commercial quality and may be spread and compacted by any method that will produce a smooth riding surface. Temporary asphalt concrete tapers shall be completely removed, including the removal of loose material from the underlying surface, before placing the permanent surfacing. The removed material shall be disposed of outside the highway right of way in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Operations shall be scheduled so that not more than 7 days shall elapse between the time when transverse joints are planed in the pavement at the conform lines and the permanent surfacing is placed at the conform lines.

The material planed from the roadway surface, including material deposited in existing gutters or on the adjacent traveled way, shall be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications. Removal operations of cold planed material shall be concurrent with planing operations and follow within 15 m of the planer, unless otherwise directed by the Engineer.

Cold plane asphalt concrete pavement will be measured by the square meter. The quantity to be paid for will be the actual area of surface cold planed irrespective of the number of passes required to obtain the depth shown on the plans.

The contract price paid per square meter for cold plane asphalt concrete pavement shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in cold planing asphalt concrete surfacing and disposing of planed material, including furnishing the asphalt concrete for and constructing, maintaining, removing, and disposing of temporary asphalt concrete tapers, as specified in the Standard Specifications and these special provisions and as directed by the Engineer.

**CAP INLET**

Existing pipe inlets and concrete drainage inlets, where shown on the plans to be capped, shall be capped as shown on the plans.

Portland cement concrete shall be minor concrete or may be produced from commercial quality aggregates and cement containing not less than 350 kg of cement per cubic meter.

Inlets shall be removed to a depth of at least 0.3-m below the grading plane.

Concrete removal shall be performed without damage to portions of the inlet that are to remain in place. Damage to existing concrete, which is to remain in place, shall be repaired by the Contractor to a condition equal to that existing prior to the beginning of removal operations. The repair of existing concrete damaged by the Contractor's operations shall be at the Contractor's expense.

Existing reinforcement that is to be incorporated in the new work shall be protected from damage and shall be thoroughly cleaned of adhering material before being embedded in the new concrete.

The quantity of capping inlets will be determined as units from actual count.

The contract unit price paid for cap inlet shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in capping inlets, including removing portions of inlets, bar reinforcing steel, and structure excavation and structure backfill, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

**MODIFY INLET**

Existing drainage inlets where shown on the plans to be modified shall be modified as shown on the plans.

Portland cement concrete shall be minor concrete or may be produced from commercial quality aggregates and cement containing not less than 350 kg of cement per cubic meter.

Concrete removal shall be performed without damage to portions of the inlet that are to remain in place. Damage to existing concrete, which is to remain in place, shall be repaired by the Contractor to a condition equal to that existing prior to the beginning of removal operations. The repair of existing concrete damaged by the Contractor's operations shall be at the Contractor's expense.

Existing reinforcement that is to be incorporated in the new work shall be protected from damage and shall be thoroughly cleaned of adhering material before being embedded in the new concrete.

The quantity of modifying inlets will be determined as units from actual count.

The contract unit price paid for modify inlet shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in modifying inlets, including removing portions of inlets, rounding bottoms of inlets, bar reinforcing steel, and structure excavation and structure backfill, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

**BRIDGE REMOVAL**

Removing bridges or portions of bridges shall conform to the provisions in Section 15-4, "Bridge Removal," of the Standard Specifications and these special provisions.

Bridge removal (portion) shall consist of removing the existing concrete deck overhangs, barriers, abutments, wingwalls, retaining walls, closure walls, slope paving, cable railing, approach slabs, and other various portions of the existing bridges as shown on the plans at the following locations:

Bridge Removal (Portion), Location A
Wineville Road Undercrossing (Widen)
(Bridge No. 56-0601)

Bridge Removal (Portion), Location B
Mira Loma Overhead (Widen)
(Bridge No. 56-0602)

Bridge Removal (Portion), Location C
Etiwanda Ave Undercrossing (Widen)
(Bridge No. 56-0603)

Bridge Removal (Portion), Location D
San Sevaine Channel Bridge (Modify)
(Bridge No. 56-0645)

Bridge Removal (Portion), Location E
Sounwall SW #58
(Bridge No. 56-SW58)

Bridge Removal (Portion), Location F
Campbell Street Undercrossing (Widen)
(Bridge No. 56-0526)

Bridge Removal (Portion), Location G
Pyrite Street Undercrossing (Widen)
(Bridge No. 56-0528)

Bridge Removal (Portion), Location H
Camino Real Undercrossing (Widen)
(Bridge No. 56-0661)

Removed materials that are not to be salvaged or used in the reconstruction shall become the property of the Contractor and shall be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

The Contractor shall submit a complete bridge removal plan to the Engineer for each bridge listed above, detailing procedures, sequences, and all features required to perform the removal in a safe and controlled manner.

The bridge removal plan shall include, but not be limited to the following:

A. The removal sequence, including staging of removal operations.
A. Equipment locations on the structure during removal operations.
B. Temporary support shoring or temporary bracing.
C. Locations where work is to be performed over traffic, utilities, or railroad property.

D. Details, locations, and types of protective covers to be used.
E. Measures to assure that people, property, utilities, and improvements will not be endangered.
F. Details and measures for preventing material, equipment, and debris from falling onto public traffic, or railroad property.

When protective covers are required for removal of portions of a bridge, or when superstructure removal works on bridges are involved, the Contractor shall submit working drawings, with design calculations, to the Engineer for the proposed bridge removal plan, and the bridge removal plan shall be prepared and signed by an engineer who is registered as a Civil Engineer in the State of California. The design calculations shall be adequate to demonstrate the stability of the structure during all stages of the removal operations. Calculations shall be provided for each stage of bridge removal and shall include dead and live load values assumed in the design of protective covers.

Temporary support shoring, temporary bracing, and protective covers, as required, shall be designed and constructed in conformance with the provisions in Section 51-1.06, "Falsework," of the Standard Specifications and these special provisions.

The assumed horizontal load to be resisted by the temporary support shoring and temporary bracing, for removal operations only, shall be the sum of the actual horizontal loads due to equipment, construction sequence or other causes, and an allowance for wind, but in no case shall the assumed horizontal load to be resisted in any direction be less than 5 percent of the total dead load of the structure to be removed.

The bridge removal plan shall conform to the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications. The number of sets of drawings, design calculations, and unless otherwise specified in the following table, the time for reviewing bridge removal plans shall be the same as specified for falsework working drawings in Section 51-1.06A, "Falsework Design and Drawings," of the Standard Specifications.

The time to be provided for the Engineer's review of the bridge removal plans for removing specific structures, or portions thereof, shall be as follows:

| Structure or Portion of Structure | Review Time - Weeks |
|---|---|
| Wineville Road Undercrossing (Widen) Bridge No. 56-0601 | 4 |
| Mira Loma Overhead (Widen) Bridge No. 56-0602 | 10 |
| Etiwanda Ave Undercrossing (Widen) Bridge No. 56-0603 | 4 |
| Campbell Street Undercrossing (Widen) Bridge No. 56-0526 | 4 |
| Pyrite Street Undercrossing (Widen) Bridge No. 56-0528 | 4 |
| Camino Real Undercrossing (Widen) Bridge No. 56-0661 | 4 |

For bridge removal over railroads, approval by the Engineer of the bridge removal plans will be contingent upon the drawings being satisfactory to the railroad company involved.

Temporary support shoring, temporary bracing, and protective covers over railroads, shall conform to the latest guidelines of the railroad company involved and shall provide the minimum clearances required under "Relations with Railroad Company" of these special provisions for the passage of railroad traffic.

The following additional requirements apply to the removal of bridges or portions of bridges whenever the removal work is to be performed over public traffic or railroad property:

A. A protective cover shall be constructed before beginning bridge removal work. The protective cover shall be supported by shoring, falsework, or members of the existing structure. The Contractor shall be responsible for designing and constructing safe and adequate protective covers, shoring, and falsework with sufficient strength and rigidity to support the entire load to be imposed.
A. The construction and removal of the protective cover, and the installation and removal of temporary railings shall conform to the provisions in "Maintaining Traffic," "Temporary Railings" of these special provisions.
B. Bridge removal methods shall be described in the working drawings, supported by calculations with sufficient details to substantiate live loads used in the protective cover design. Dead and live load values assumed for designing the protective cover shall be shown on the working drawings.

C. The protective cover shall prevent any materials, equipment, or debris from falling onto public traffic or railroad property. The protective cover shall have a minimum strength equivalent to that provided by good, sound Douglas fir planking having a nominal thickness of 50 mm. Additional layers of material shall be furnished as necessary to prevent fine materials or debris from sifting down upon the traveled way and shoulders.
D. During the removal of bridge segments, and when portions of the bridge, such as deck slabs or box girder slabs, comply with the requirements for the protective cover, a separate protective cover need not be constructed.
F. The protective cover shall extend at least 3 m beyond the outside face of the bridge railing, except that, at locations where the bridge railing is to be removed and new girders are not constructed, the protective cover shall extend from the face of the exterior girder or at least 0.6-m inside of the bridge railing to be removed, whichever is less, to at least 1.2 m beyond the outside face of the bridge railing.
F. The protective cover shall provide the openings specified under "Maintaining Traffic" of these special provisions, except that when no openings are specified for bridge removal, a vertical opening of 4.6 m and a horizontal opening of 9.8 m shall be provided for the passage of public traffic.
G. Falsework or supports for protective covers shall not extend below the vertical clearance level nor to the ground line at any location within the roadbed.
H. The construction of the protective cover as specified herein shall not relieve the Contractor of responsibilities specified in Section 7-1.12A, "Indemnification," and Section 7-1.12B, "Insurance," of the Standard Specifications.
I. Before removal of the protective cover, the Contractor shall clean the protective cover of all debris and fine material.

For bridge removal that requires the Contractor's registered engineer to prepare and sign the bridge removal plan, the Contractor's registered engineer shall be present at all times when bridge removal operations are in progress. The Contractor's registered engineer shall inspect the bridge removal operation and report in writing on a daily basis the progress of the operation and the status of the remaining structure. A copy of the daily report shall be available at the site of the work at all times. Should an unplanned event occur or the bridge operation deviate from the approved bridge removal plan, the Contractor's registered engineer shall submit immediately to the Engineer for approval, the procedure of operation proposed to correct or remedy the occurrence.

**REMOVE CONCRETE**

Concrete, where shown on the plans to be removed, shall be removed.

The pay quantities of concrete to be removed will be measured by the cubic meter, measured before and during removal operations.

Concrete removed shall be disposed of outside the highway right of way in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

## 10-1.29 CLEARING AND GRUBBING

Clearing and grubbing shall conform to the provisions in Section 16, "Clearing and Grubbing," of the Standard Specifications and these special provisions.

Attention is directed to "Aerially Deposited Lead" of these special provisions.

Clearing and grubbing shall be performed in the temporary construction easements for this project, such work shall be performed in accordance with Section 16-1.03, "CONSTRUCTION," of the Standard Specifications. Temporary construction easements are considered highway construction areas.

Existing vegetation outside the areas to be cleared and grubbed shall be protected from injury or damage resulting from the Contractor's operations.

Activities controlled by the Contractor, except cleanup or other required work, shall be confined within the graded areas of the roadway.

Nothing herein shall be construed as relieving the Contractor of the Contractor's responsibility for final cleanup of the highway as provided in Section 4-1.02, "Final Cleaning Up," of the Standard Specifications.

Full compensation for clearing and grubbing temporary construction easements shall be considered as included in the contract lump sum price paid for clearing and grubbing and no additional compensation will be allowed therefor.

## 10-1.30 WATERING

Developing a water supply and applying watering shall conform to the provisions in Section 17, "Watering," of the Standard Specifications.

## 10-1.31 EARTHWORK

Earthwork shall conform to the provisions in Section 19, "Earthwork," of the Standard Specifications and these special provisions.

Surplus excavated material not designated or determined to contain aerially deposited lead shall become the property of the Contractor and shall be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Where a portion of the existing surfacing is to be removed, the outline of the area to be removed shall be cut on a neat line with a power-driven saw to a minimum depth of 50 mm before removing the surfacing. Full compensation for cutting the existing surfacing shall be considered as included in the contract price paid per cubic meter for roadway excavation and no additional compensation will be allowed therefor.

Reinforcement or metal attached to reinforced concrete rubble placed in embankments shall not protrude above the grading plane. Prior to placement within 0.6-m below the grading plane of embankments, reinforcement or metal shall be trimmed to no greater than 20 mm from the face of reinforced concrete rubble. Full compensation for trimming reinforcement or metal shall be considered as included in the contract prices paid per cubic meter for the types of excavation shown in the Engineer's estimate, or the contract prices paid for furnishing and placing imported borrow or embankment material, as the case may be, and no additional compensation will be allowed therefor.

At the option of the Contractor, vegetable growth may be disposed of in embankment areas by either Method I or Method II.

A. METHOD I

1. Buried vegetable growth shall be placed outside of the 1:1 inclined plane sloping out and down from the outside edge of the shoulder of the planned roadbed, but not within 1.5 m of the finished slope line, measured normal to the slope.
2. Brush and debris shall be mixed with not less than 50 percent earth and placed in uniform layers.
3. No material shall be disposed of where the material will interfere with planned work.

B. METHOD II

1. Buried vegetable growth shall be placed at least 4.5 m beneath the grading plane, at least 3 m from the surface of any embankment slope, and at least 2.0 m horizontally from and not beneath any planned structures, including but not limited to: abutments, walls, footings, foundations, piles, drainage structures and utility installations.
2. Brush, grass, weeds, slash, and limbs or logs under 100 mm in diameter shall be chipped and placed on the completed embankment slopes and mixed with the underlying earth to such extent that the vegetable growth will not support combustion.

Full compensation for disposing of vegetable growth in embankment areas shall be considered as included in the contract lump sum price paid for clearing and grubbing and no additional compensation will be allowed therefor.

Pervious backfill material placed within the limits of payment for bridges will be measured and paid for as structure backfill (bridge).

Pervious backfill material placed within the limits of payment for retaining walls will be measured and paid for as structure backfill (retaining wall).

If structure excavation or structure backfill for bridges is not otherwise designated by type and payment for the structure excavation or structure backfill has not otherwise been provided for in the Standard Specifications or these special provisions, the structure excavation or structure backfill will be measured and paid for as structure excavation (bridge) or structure backfill (bridge), respectively.

**10-1.32 SOIL ANCHOR**

Soil anchors and test soil anchors, consisting of drilling holes in natural foundation materials, installing and grouting prefabricated anchors in drilled holes, and testing of test soil anchors, shall conform to the details shown on the plans, the provisions of the Standard Specifications, and these special provisions.

Foundation recommendations are included in the "Information Handout" available to the Contractor in conformance with the provisions in Section 2-1.03, "Examination of Plans, Specifications, Contract, and Site of Work," of the Standard Specifications.

## WORKING DRAWINGS

The Contractor shall submit a complete working drawing submittal for soil anchors to the Officeof Structure Design (OSD) in conformance with the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications. All working drawings for soil anchors shall be 559 mm by 864 mm in size. For initial review, 5 sets of drawings shall be submitted. After review, between 6 and 12 sets, as requested by the Engineer, shall be submitted to OSDfor final approval and use during construction.

Working drawing submittals for soil anchors shall show the State assigned designations for the contract number, structure number, full name of the structure as shown on the contract plans, and District-County-Route-Kilometer post on each drawing and calculation sheet. The Contractor's name, address, and phone and FAX numbers shall also be shown on the working drawings. Each working drawing sheet shall be numbered in the lower right hand corner of the sheet.

The working drawing submittal for soil anchors shall contain all information required for the construction and quality control of the soil anchor, including the following:

A. The proposed schedule and detailed construction sequence of the installation and grouting of soil anchors.
B. Complete details and specifications of the soil anchor and test soil anchor, including encapsulation materials and method of grouting the encapsulation, and type of packers or other appropriate devices to be used to ensure partial length grouting of test soil anchor.
C. Grout mix designs and procedures involved in testing grout.
D. Grout placement procedures and equipment including minimum required cure time.
E. Details of the equipment proposed for testing soil anchors, including jacking frame and appurtenant bracing, and the method and equipment for determining any displacement of the test soil anchor relative to the grout during application of test loads.
F. Information on space requirements for installation equipment.
G. Drilling methods and equipment.

The working drawing submittal shall be stamped and signed by an engineer who is registered as a Civil Engineer in the State of California.

The Contractor shall allow the Engineer 4 weeks to review the soil anchor working drawings after a complete submittal has been received. No soil anchors shall be fabricated or installed until the Engineer has approved, in writing, the working drawing submittal for soil anchors.

Should the Engineer fail to review the complete working drawing submittal within the time specified, and if, in the opinion of the Engineer, the Contractor's controlling operation is delayed or interfered with by reason of the delay in reviewing the soil anchor working drawing submittal, an extension of time commensurate with the delay in completion of the work thus caused will be granted in conformance with the provisions in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

## MATERIALS

The materials specified below shall be used for construction of soil anchors and test soil anchors.

### Soil Anchor

Soil anchors shall conform to the provisions for bar reinforcement in Section 52, "Reinforcement," of the Standard Specifications. When Grade 420 soil anchors are shown on the plans, the soil anchors shall also conform to the requirements in ASTM Designation: A 615/A 615M or A706/A706M. When Grade 520 soil nails are shown on the plans, the soil anchor nails shall also conform to the requirements in ASTM Designation: A 615/A 615M. The soil anchor shall be either a reinforcing bar encapsulated full length in a grouted corrugated plastic sheathing or an epoxy coated reinforcing bar partially encapsulated in a grouted corrugated plastic sheathing. The bar shall be centered in the sheathing and the space between the sheathing and the bar shall be filled with grout. The epoxy coating shall have a minimum thickness of 305 µm.

Soil anchors shall be lengthened or additional soil anchors shall be installed when ordered by the Engineer. The lengthening or addition of soil anchors, when ordered by the Engineer, will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications.

Corrugated plastic sheathing shall be either polyvinyl chloride (PVC) or high density polyethylene (HDPE). The minimum sheathing wall thickness shall be 1.0 mm.

HDPE shall have a density between 0.940 and 0.960-g/cm$^3$ when measured in conformance with the requirements in ASTM Designation: D 792, A-2.

The sheathing shall have sufficient strength to prevent damage during construction operations and shall be watertight, chemically stable without embrittlement or softening, and nonreactive with concrete.

Splicing of soil anchors shall be made only at the locations shown on the plans or at ends of soil anchors which the Engineer has ordered to be lengthened.

### Test Soil Anchor

Test soil anchors shall conform to the provisions for bar reinforcement in Section 52, "Reinforcement," of the Standard Specifications, and shall be of a size and grade determined by the Contractor.

Test soil anchors shall be lengthened or additional test soil anchors shall be installed when ordered by the Engineer. The lengthening or addition of test soil anchor, when ordered by the Engineer, will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications.

Test soil anchors need not be epoxy coated or encapsulated in grouted plastic sheathing.

Splicing of test soil anchors shall be made only at locations outside of the bonded length.

### Grout

Grout shall conform to the provisions in Section 50-1.09, "Bonding and Grouting," of the Standard Specifications. California Test 541 will not be required nor will the grout be required to pass through a screen with a 1.80-mm maximum clear opening prior to being introduced into the grout pump. Fine aggregate may be added to the grout mixture of portland cement and water in drilled holes 150 mm or greater in diameter, but only to the extent that the cement content of the grout is not less than 600 kilograms per cubic meter of grout. Fine aggregate, if used, shall conform to the provisions in Section 90-2, "Materials," and Section 90-3, "Aggregate Gradings," of the Standard Specifications. Grout with fine aggregate shall have a nominal penetration equal to or greater than 90 mm when measured in conformance with California Test 533, and shall have an air content of equal to or less than 2 percent when measured in conformance with California Test 504. Air entraining admixtures shall not be used for grout with fine aggregate.

The consistency of grout with fine aggregate shall be verified prior to use by producing a batch to be tested. The test batch shall be produced and delivered to the project under conditions and in time periods similar to those expected during the placement of grout in the soil anchors. Grout for the test batch shall be placed in an excavated hole or suitable container of adequate size to allow testing in conformance with California Test 533. The test batch shall demonstrate that the proposed grout mix achieves the specified nominal penetration. Upon completion of the testing, the grout shall be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

## CONSTRUCTION

Soil anchors shall be installed in drilled holes in an expeditious manner so that caving or deterioration of the drilled hole does not occur. No portion of the drilled hole shall be left open for more than 60 minutes prior to soil anchor placement and grouting unless otherwise approved by the Engineer.

Difficult soil anchor construction is anticipated due to the presence of caving or raveling soil, underground utilities and the requirement of traffic control.

### Drilling

Drilling equipment shall be designed to drill straight and clean holes. The drilling method and the size and capability of the drilling equipment shall be as approved in the working drawings. Drill rigs shall have the capability of anchorage installation and grout placement through the use of drill casing or hollow-stem augers.

At locations where caving conditions are anticipated, sufficient casing and auger lengths shall be available on site to maintain uninterrupted installation of anchors.

At locations where hard drilling conditions such as rock, cobbles, boulders, or obstructions are anticipated, a down hole pneumatic hammer drill rig and drill bit shall be available on site to drill holes for soil anchors.

Holes shall be drilled in the natural foundation materials. Holes for test soil anchors shall be of the same diameter as those for the production soil anchors they represent.

Holes shall be cleaned to remove material resulting from the drilling operations and to remove any other material that would impair the strength of the soil anchors or test soil anchors. Foreign material dislodged or drawn into the holes during construction of the anchors shall be removed. Water for cleaning holes shall not be used, unless full hole length hollow-stem augers or casing is maintained in the same hole during cleaning and soil anchor installation. Soil anchors and test soil anchors shall not be installed in the drilled holes until the holes have been inspected by the Engineer.

### Installing Soil Anchors and Test Soil Anchors

Soil anchors and test soil anchors shall be installed in the drilled holes using centralizers. Centralizers shall adequately support the bar in the center of the drilled hole and shall be spaced at a maximum of 1.5 m on center along the length of the bar, and 0.5-m from the end of the bar.

Where the soil anchor cannot be completely inserted, the Contractor shall remove the bar and clean or redrill the hole to permit unobstructed installation. Partially installed bars shall not be driven or forced into the drilled hole and will be rejected. When open-hole drilling methods are being used, the Contractor shall have hole cleaning tools on-site suitable for cleaning drilled holes along their full length just prior to bar insertion and grouting.

### Grouting

The length of drilled hole shall be verified and recorded by the Contractor before grouting.

Grout shall be injected at the low end of the drilled hole and shall fill the drilled hole with a dense grout free of voids or inclusion of foreign material. Cold joints shall not be used in grout placement. Soil anchors shall be grouted full length.

Only the bonded length of test soil anchors shall be initially grouted. Initial grouting shall be confined to the bonded length by packers or other approved devices. For test soil anchors, grouting of the remainder of the drilled hole shall not be done until pullout tests have been completed and approved by the Engineer.

After placing the grout for soil anchors and test soil anchors, they shall remain undisturbed for the cure time stated in the approved soil anchor working drawings.

### Securing Test Soil Anchors

Testing shall be performed against a temporary bearing yoke which bears directly on the soil. Test loads transmitted through the temporary bearing yoke shall not cause displacement or sloughing of the soil surrounding the drilled hole.

Test soil anchors shall be removed to below the bottom face of the barrier slab after testing has been completed. The remaining length of void in the drilled hole shall be grouted.

## TESTING

Test soil anchors shall be pullout tested by the Contractor in the presence of the Engineer. A pullout test shall consist of incrementally loading the anchor until either the pullout test load has been held for one minute or the total measured movement of the soil anchor exceeds 50 mm, at which point the load shall be recorded as part of the test data and submitted to the Engineer at the conclusion of each test.

The Contractor shall monitor and record total movement of the test soil anchor relative to the grout during application of the test load.

Applied test loads shall be determined by using either a calibrated pressure gage or a load cell. Movements of the end of the soil anchor, relative to an independent fixed reference point, shall be measured and recorded to the nearest 25 µm at each increment of load, including the ending alignment load, during the load tests.

The pressure gage shall have an accurately reading dial at least 150 mm in diameter. Each jack and its gage shall be calibrated as a unit with the cylinder extension in the approximate position that it will have at final jacking force, and shall be accompanied by a certified calibration chart. Each jack and pressure gage assembly shall be calibrated in conformance with Section 50-1.08, "Prestressing," of the Standard Specifications. The load cell shall be calibrated and shall be provided with an indicator capable of measuring the test load in the soil anchor. The range of the load cell shall be such that the lower 10 percent of the manufacturer's rated capacity will not be used in determining the jacking force.

The test load may be verified by State forces with either State-furnished load cells or pressure cells, or with State-furnished Vibra-Tension equipment operated in conformance with the requirements of California Test 677. The Contractor shall provide sufficient labor, equipment, and material to install and support such testing equipment at the soil anchors and to remove the testing equipment after the testing is complete, as ordered by the Engineer.

The pullout test procedures shall conform to the following:

A. The pullout test shall be conducted by measuring and recording the test load applied to the test soil anchor and the test soil anchor end movement at each load listed in the following loading schedule.

PULLOUT TEST LOADING SCHEDULE

AL
0.20M
0.30M
0.40M
0.50M
0.60M
0.70M
0.80M
0.90M
1.00M (PULLOUT TEST LOAD)
AL

(M = MAXIMUM TEST LOAD (kN) = $0.0141\sigma_b D$)
Where $\sigma_b$=Ultimate bond stress between grout and drilled hole as shown on the plans, in kPa; and D=actual drilled hole diameter, in millimeters.
(AL = ALIGNMENT LOAD = 0.1M)

B. Each increment of load shall be applied in less than one minute and held for at least one minute but not more than 2 minutes, except that the load equal to 0.70M shall be held for 10 minutes. During the 10-minute load hold, the movement of the end of the soil anchor shall be measured at 1, 2, 3, 4, 5, 6, and 10 minutes. The observation period for the 10-minute load hold shall start when the pump begins to apply the increment of load from 0.60M to 0.70M. If the creep movement measured between one minute and 10 minutes at 0.70M is less than one mm, the load shall continue to be increased incrementally to 1.00M, then reduced to the ending alignment load. The test soil anchor shall be considered acceptable if 1) the creep movement measured between one minute and 10 minutes is less than one mm, 2) the total measured movement is greater than 80 percent of the theoretical elastic elongation of the test anchor unbonded length at the 1.0M load, and 3) the total measured movement is less than 50 mm.
C. If the load of 0.70M cannot be maintained for 10 minutes with one mm or less creep movement, the 0.70M load shall be maintained for an additional 50 minutes. Total movement shall be measured at 15, 20, 25, 30, 45, and 60 minutes. If the test load is held for 60 minutes, a creep curve showing the creep movement between 10 minutes and 60 minutes shall be plotted as a function of the logarithm of time. If the creep curve plotted from the movement data indicates a creep rate of less than 2.0 mm for the last log cycle of time, the load shall continue to be increased incrementally to 1.00M, then reduced to the ending alignment load. The test soil anchor shall be considered acceptable if 1) the creep curve plotted from the movement data indicates a creep rate of less than 2.0 mm for the last log cycle of time, 2) the total measured movement is greater than 80 percent of the theoretical elastic elongation of the test nail unbonded length at the 1.0M load, and 3) the total measured movement is less than 50 mm.
D. The soil anchor shall be unloaded only after completion of the test.

Test soil anchors that fail to meet acceptance criteria shall be extracted when requested by the Engineer. Full compensation for extracting test soil anchors shall be considered as included in the contract price paid per meter for soil anchor, and no separate payment will be made therefor.

The Contractor shall furnish to the Engineer complete test results for each soil anchor tested. Data for each test shall list key personnel, test loading equipment, test soil anchor location, hole diameter and depth, bond length, type of soil, method of drilling, and amount of ground water encountered within the bond length. Test data shall also include the dates and times of drilling, test soil anchor installation, grouting, and testing. The test load and amount of displacement shall be included in the test data when any displacement of the test soil anchor relative to the grout occurs during application of the test load.

**MEASUREMENT**

Soil anchor and test soil anchor will be measured and paid for by the meter. The length to be paid for will be the length of soil anchor or test soil anchor measured along the bar centerline from the bottom face of barrier slab to the tip end shown on the plans or ordered in writing by the Engineer.

**PAYMENT**

The contract price paid per meter for soil anchor shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing the soil anchors, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Test soil anchors will be paid for as soil anchor.

Full compensation for testing of the test soil anchors shown on the plans shall be considered as included in the contract price paid per meter for soil anchor, and no separate payment will be made therefor.

Full compensation for repair of all damage to existing structures, restoration of grade in subsided areas, and all other damage done by drilling shall be considered as included in the contract price paid per meter for soil anchor, and no additional compensation will be allowed therefor.

Full compensation for furnishing, installing, and removing casing shall be considered as included in the contract price paid per meter for soil anchor, and no additional compensation will be allowed therefor.

The quantities of trial batch grout will not be included in any contract item of work, and full compensation for furnishing, producing, and disposing of trial batches shall be considered as included in the contract price paid per meter for soil anchor, and no additional compensation will be allowed therefor.

## 10-1.33 MATERIAL CONTAINING AERIALLY DEPOSITED LEAD

Earthwork involving material containing aerially deposited lead shall conform to the provisions in Section 19, "Earthwork" of the Standard Specifications and these special provisions.

Attention is directed to "Aerially Deposited Lead" of these special provisions.

### LEAD COMPLIANCE PLAN

The Contractor shall prepare a project specific Lead Compliance Plan to prevent or minimize worker exposure to lead while handling material containing aerially deposited lead. Attention is directed to Title 8, California Code of Regulations, Section 1532.1, “Lead,” for specific California Department of Industrial Relations, Division of Occupational Safety and Health (Cal-OSHA) requirements when working with lead.

The Lead Compliance Plan shall contain the elements listed in Title 8, California Code of Regulations, Section 1532.1(e)(2)(B). Before submission to the Engineer, the Lead Compliance Plan shall be approved by an Industrial Hygienist certified in Comprehensive Practice by the American Board of Industrial Hygiene. The plan shall be submitted to the Engineer for review and acceptance at least 5 days prior to beginning work in areas containing aerially deposited lead.

The Lead Compliance Plan shall include perimeter air monitoring incorporating upwind and downwind locations as shown on the plans or as approved by the Engineer. Monitoring shall be by personal air samplers using National Institute of Safety and Health Method 7082. Sampling shall achieve a detection limit of 0.05 $\mu g/m^3$ of air per day. Daily monitoring shall take place while the Contractor clears and grubs and performs earthwork operations. A single representative daily sample shall be analyzed for lead. Results shall be analyzed and provided to the Engineer within 24 hours. Average lead concentrations shall not exceed 1.5 $\mu g/m^3$ of air per day. If concentrations exceed this level the Contractor shall stop work and modify the work to prevent release of lead. Monitoring shall be done under the direction of, and the data shall be reviewed by and signed by a Certified Industrial Hygienist.

The Contractor shall not work in areas containing aerially deposited lead within the project limits, unless authorized in writing by the Engineer, until the Engineer has accepted the Lead Compliance Plan.

Prior to performing work in areas containing aerially deposited lead, personnel who have no prior training or are not current in their training status, including Department personnel, shall complete a safety training program provided by the Contractor. The safety training program shall meet the requirements of Title 8, California Code of Regulations, Section 1532.1, "Lead."

Personal protective equipment, training, and washing facilities required by the Contractor's Lead Compliance Plan shall be supplied to Department personnel by the Contractor. The number of Department personnel will be 2.

The Engineer will notify the Contractor of acceptance or rejection of the submitted or revised Lead Compliance Plan not more than 10 days after submittal of the plan.

The contract lump sum price paid for Lead Compliance Plan shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in preparing the Lead Compliance Plan, including paying the Certified Industrial Hygienist, and for providing personal protective equipment, training and medical surveillance, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

## 10-1.34 EROSION CONTROL (TYPE D)

Erosion control (Type D) shall conform to the provisions in Section 20-3, "Erosion Control," of the Standard Specifications and these special provisions and shall consist of applying erosion control materials to embankment and excavation slopes and other areas disturbed by construction activities excluding mulch areas and planting areas as specified under roadside clearing elsewhere in these special provisions.

If the slope on which the erosion control is to be placed is finished during the rainy season as specified in "Water Pollution Control" of these special provisions, the erosion control shall be applied immediately to the slope.

Prior to installing erosion control materials, soil surface preparation shall conform to the provisions in Section 19-2.05, "Slopes," of the Standard Specifications, except that rills and gullies exceeding 50 mm in depth or width shall be leveled. Vegetative growth, temporary erosion control materials, and other debris shall be removed from areas to receive erosion control.

**MATERIALS**

Materials shall conform to the provisions in Section 20-2, "Materials," of the Standard Specifications and these special provisions.

**Seed**

Seed shall conform to the provisions in Section 20-2.10, "Seed," of the Standard Specifications. Individual seed species shall be measured and mixed in the presence of the Engineer.

Seed shall be delivered to the project site in unopened separate containers with the seed tag attached. Containers without a seed tag attached will not be accepted.

A sample of approximately 30 g of seed will be taken from each seed container by the Engineer.

**Legume Seed**

Legume seed shall be pellet-inoculated or industrial-inoculated and shall conform to the following:

A. Inoculated seed shall be inoculated in conformance with the provisions in Section 20-2.10, "Seed," of the Standard Specifications.
B. Inoculated seed shall have a calcium carbonate coating.
C. Industrial-inoculated seed shall be inoculated with Rhizobia and coated using an industrial process by a manufacturer whose principal business is seed coating and seed inoculation.
D. Industrial-inoculated seed shall be sown within 180 calendar days after inoculation.
E. Legume seed shall consist of the following:

LEGUME SEED

| Botanical Name (Common Name) | Percent Germination (Minimum) | Kilograms Pure Live Seed Per Hectare (Slope Measurement) |
|---|---|---|
| Lotus scoparius (Deerweed) | 30 | 3.00 |
| Lupinus arizonicus (Arizona Lupine) | 30 | 2.00 |

**Non-Legume Seed**

Non-legume seed shall consist of the following:

NON-LEGUME SEED

| Botanical Name (Common Name) | Percent Germination (Minimum) | Kilograms Pure Live Seed Per Hectare (Slope Measurement) |
|---|---|---|
| Abronia villosa<br>Hairy Sand Verbena | 20 | 2.00 |
| Croton setiger<br>Doveweed | 20 | 0.70 |
| Encelia farinosa<br>Brittle Bush | 30 | 2.50 |
| Eriogonum fasciculatum<br>California Buckwheat | 10 | 3.00 |
| Eriophyllum confertiflorum<br>Golden Yarrow | 30 | 2.00 |
| Eschscholzia californica<br>California Poppy | 30 | 3.00 |
| Gnaphalium scoparium<br>California Everlasting | 10 | 0.10 |
| Helianthemum scopartium<br>Common Rockrose | 30 | 2.00 |
| Mimulus longiflorus<br>Yellow Monkey Flower | 30 | 0.20 |

**Commercial Fertilizer**

Commercial fertilizer shall conform to the provisions in Section 20-2.02, "Commercial Fertilizer," of the Standard Specifications and shall have a guaranteed chemical analysis of 16 percent nitrogen, 20 percent phosphoric acid and 0 percent water soluble potash.

**Straw**

Straw shall conform to the provisions in Section 20-2.06, "Straw," of the Standard Specifications and these special provisions.

Straw shall be derived from rice.

Straw shall be free of plastic, glass, metal, rocks, and refuse or other deleterious material.

**Stabilizing Emulsion**

Stabilizing emulsion shall conform to the provisions in Section 20-2.11, "Stabilizing Emulsion," of the Standard Specifications and these special provisions.

Stabilizing emulsion shall be in a dry powder form, may be reemulsifiable, and shall be a processed organic adhesive used as a soil tackifier.

**APPLICATION**

Erosion control materials shall be applied in separate applications in the following sequence:

A. The following mixture in the rates indicated shall be applied with hydro-seeding equipment within 60 minutes after the seed has been added to the mixture:

| Material | Kilograms Per Hectare (Slope Measurement) |
|---|---|
| Legume Seed | 5.00 |
| Non-Legume Seed | 15.50 |
| Fiber | 800 |
| Commercial Fertilizer | 300 |

B. Straw shall be applied at the rate of 4 tonnes per hectare based on slope measurements. Incorporation of straw will not be required. Straw shall be distributed evenly without clumping or piling.

C. The following mixture in the rates indicated shall be applied with hydro-seeding equipment:

| Material | Kilograms Per Hectare (Slope Measurement) |
|---|---|
| Fiber | 800 |
| | |
| Stabilizing Emulsion (Solids) | 800 |

The ratio of total water to total stabilizing emulsion in the mixture shall be as recommended by the manufacturer.

Once straw work is started in an area, stabilizing emulsion applications shall be completed in that area on the same working day.

The rates of erosion control materials may be changed by the Engineer to meet field conditions.

**10-1.35 IRRIGATION CROSSOVERS**

Irrigation crossovers shall conform to the provisions in Section 20-5, "Irrigation Systems," of the Standard Specifications and these special provisions.

Conduits shall be placed in open trenches in conformance with the provisions in Section 20-5.03B, "Conduit for Irrigation Crossovers," of the Standard Specifications.

Conduits shall be corrugated high density polyethylene (CHDPE) pipe. Corrugated high density polyethylene pipe shall conform to the requirements in ASTM Designation: F 405 or F 667, or AASHTO Designation: M 252 or M 294 and shall be Type S. Couplings and fittings shall be as recommended by the pipe manufacturer.

Water line crossovers shall conform to the provisions in Section 20-5.03C, "Water Line Crossovers," of the Standard Specifications.

Sprinkler control crossovers shall conform to the provisions in Section 20-5.027D, "Sprinkler Control Crossovers," of the Standard Specifications.

**10-1.36 LEAN CONCRETE BASE**

Lean concrete base shall conform to the provisions in Section 28, "Lean Concrete Base," of the Standard Specifications.

**10-1.37 ASPHALT CONCRETE**

Asphalt concrete shall be Type A and shall conform to the provisions in Section 39, "Asphalt Concrete," of the Standard Specifications and these special provisions.

The grade of asphalt binder to be mixed with aggregate for Type A asphalt concrete shall be PBA Grade AR 4000 and shall conform to the provisions in "Asphalt" of these special provisions.

The amount of asphalt binder used in asphalt concrete placed in dikes, gutters, gutter flares, overside drains and aprons at the ends of drainage structures shall be increased one percent by mass of the aggregate over the amount of asphalt binder determined for use in asphalt concrete placed on the traveled way.

The aggregate for Type A asphalt concrete shall conform to the 19-mm maximum medium grading specified in Section 39-2.02, "Aggregate," of the Standard Specifications.

The asphalt content of the asphalt mixture will be determined in conformance with the requirements in California Test 379, or in conformance with the requirements in California Test 382.

Paint binder (tack coat) shall be applied to existing surfaces to be surfaced and between layers of asphalt concrete, except when eliminated by the Engineer.

Paint binder (tack coat) shall be, at the option of the Contractor, either slow-setting asphaltic emulsion, rapid-setting asphaltic emulsion or paving asphalt. Slow-setting asphaltic emulsion and rapid-setting asphaltic emulsion shall conform to the provisions in Section 39-4.02, "Prime Coat and Paint Binder (Tack Coat)," and the provisions in Section 94, "Asphaltic Emulsions," of the Standard Specifications. When paving asphalt is used for paint binder, the grade will be determined by the Engineer. Paving asphalt shall conform to the provisions in Section 39-4.02, "Prime Coat and Paint Binder (Tack Coat)," and the provisions in Section 92, "Asphalts," of the Standard Specifications.

Paint binder (tack coat) shall be applied in the liter per square meter range limits specified for the surfaces to receive asphalt concrete in the tables below. The exact application rate within the range will be determined by the Engineer.

| Application Rates for Asphaltic Emulsion Paint Binder (Tack Coat) on Asphalt Concrete (except Open Graded) and on Portland Cement Concrete Pavement (PCCP) | | |
|---|---|---|
| Type of surface to receive paint binder (tack coat) | Slow-Setting Asphaltic Emulsion $L/m^2$(Note A) | Rapid-Setting Asphaltic Emulsion $L/m^2$(Note B) |
| Dense, compact surfaces, between layers, and on PCCP | 0.20 – 0.35 | 0.10 – 0.20 |
| Open textured, or dry, aged surfaces | 0.35 – 0.90 | 0.20 – 0.40 |

Note A: Slow-setting asphaltic emulsion is asphaltic emulsion diluted with additional water. Water shall be added and mixed with the asphaltic emulsion (containing up to 43 percent water) so the resulting mixture contains one part asphaltic emulsion and not more than one part added water. The water shall be added by the emulsion producer or at a facility that has the capability to mix or agitate the combined blend.
Note B: Undiluted rapid-setting asphaltic emulsion.

| Application Rates for Paint Binder (Tack Coat) on Asphalt Concrete (except Open Graded) and on Portland Cement Concrete Pavement (PCCP) | |
|---|---|
| Type of surface to receive paint binder (tack coat) | Paving Asphalt $L/m^2$ |
| Dense, compact surfaces, between layers, and on PCCP | 0.05 – 0.10 |
| Open textured, or dry, aged surfaces | 0.10 – 0.25 |

| Application Rates for Asphaltic Emulsion Paint Binder (Tack Coat) on Open Graded Asphalt Concrete | | |
|---|---|---|
| Type of surface to receive paint binder (tack coat) | Slow-Setting Asphaltic Emulsion $L/m^2$(Note A) | Rapid-setting Asphaltic Emulsion $L/m^2$(Note B) |
| Dense, compact surfaces and between layers | 0.25 – 0.50 | 0.10 – 0.25 |
| Open textured, or dry, aged surfaces | 0.50 – 1.10 | 0.25 – 0.55 |

Note A: Slow-setting asphaltic emulsion is asphaltic emulsion diluted with additional water. Water shall be added and mixed with the asphaltic emulsion (containing up to 43 percent water) so the resulting mixture contains one part asphaltic emulsion and not more than one part added water. The water shall be added by the emulsion producer or at a facility that has the capability to mix or agitate the combined blend.
Note B: Undiluted rapid-setting asphaltic emulsion.

| Application Rates for Paint Binder (Tack Coat) on Open Graded Asphalt Concrete | |
|---|---|
| Type of surface to receive paint binder (tack coat) | Paving Asphalt $L/m^2$ |
| Dense, compact surfaces and between layers | 0.05 – 0.15 |
| Open textured, or dry, aged surfaces | 0.15 – 0.30 |

When asphaltic emulsion is used as paint binder (tack coat), asphalt concrete shall not be placed until the applied asphaltic emulsion has completely changed color from brown to black.

Asphalt concrete placed in layers of 45 mm or less in compacted thickness or widths of less than 1.5 m shall be spread and compacted with the equipment and by the methods conforming to the provisions in Section 39, "Asphalt Concrete," of the Standard Specifications. Other asphalt concrete shall be compacted and finished in conformance with the provisions in Section 39 and the following:

A. The provisions in Section 39-5.02, "Compacting Equipment," of the Standard Specifications shall not apply.
B. The Contractor shall furnish a sufficient number of rollers to obtain the compaction specified in these special provisions and the surface finish required by the Standard Specifications and these special provisions.
C. Rollers shall be equipped with pads and water systems that prevent sticking of asphalt mixtures to the pneumatic-tired or steel-tired wheels. A parting agent that will not damage the asphalt mixture may be used.
D. The second paragraph in Section 39-6.01, "General Requirements," of the Standard Specifications shall not apply.

E. Asphalt concrete and asphalt concrete base shall be compacted by any means to obtain the specified relative compaction before the temperature of the mixture drops below 65°C. Additional rolling to achieve the specified relative compaction will not be permitted after the temperature of the mixture drops below 65°C or once the pavement is opened to public traffic. When vibratory rollers are used as finish rollers the vibratory unit shall be turned off.
F. The fifth and seventh through tenth paragraphs of Section 39-6.03, "Compacting," of the Standard Specifications shall not apply.
G. Asphalt concrete and asphalt concrete base shall be compacted to a relative compaction of not less than 96.0 percent and shall be finished to the lines, grades, and cross section shown on the plans. In-place density of asphalt concrete and asphalt concrete base will be determined prior to opening the pavement to public traffic.
H. Relative compaction will be determined by California Test 375.
I. If the test results for a quantity of asphalt concrete or asphalt concrete base indicate that the relative compaction is below 96.0 percent, the Contractor will be notified. Asphalt concrete or asphalt concrete base spreading operations shall not continue until the Contractor has notified the Engineer of the adjustment that will be made in order to meet the specified relative compaction.
J. If the test results for a quantity of asphalt concrete or asphalt concrete base indicate that the relative compaction is less than 96.0 percent, the asphalt concrete or asphalt concrete base represented by that quantity shall be removed, except as otherwise provided in these special provisions. If requested by the Contractor and approved by the Engineer, asphalt concrete or asphalt concrete base with a relative compaction of 93.0 percent or greater may remain in place and the Contractor shall pay to the State the amount of reduced compensation for the quantity with relative compaction less than 96.0 percent and greater than or equal to 93.0 percent. The Department will deduct the amount of reduced compensation from moneys due, or that may become due, the Contractor under the contract. The amount of reduced compensation the Contractor shall pay to the State will be calculated using the total tonnes in the quantity with relative compaction less than 96.0 percent and greater than or equal to 93.0 percent multiplied by the contract price per tonne for asphalt concrete or asphalt concrete base involved multiplied by the following compensation factors:

| Relative Compaction (Percent) | Reduced Compensation Factor | Relative Compaction (Percent) | Reduced Compensation Factor |
|---|---|---|---|
| 96.0 | 0.000 | 94.4 | 0.062 |
| 95.9 | 0.002 | 94.3 | 0.068 |
| 95.8 | 0.004 | 94.2 | 0.075 |
| 95.7 | 0.006 | 94.1 | 0.082 |
| 95.6 | 0.009 | 94.0 | 0.090 |
| 95.5 | 0.012 | 93.9 | 0.098 |
| 95.4 | 0.015 | 93.8 | 0.108 |
| 95.3 | 0.018 | 93.7 | 0.118 |
| 95.2 | 0.022 | 93.6 | 0.129 |
| 95.1 | 0.026 | 93.5 | 0.142 |
| 95.0 | 0.030 | 93.4 | 0.157 |
| 94.9 | 0.034 | 93.3 | 0.175 |
| 94.8 | 0.039 | 93.2 | 0.196 |
| 94.7 | 0.044 | 93.1 | 0.225 |
| 94.6 | 0.050 | 93.0 | 0.300 |
| 94.5 | 0.056 | | |

At the Contractor's option longitudinal joints may be constructed using a device attached to the screed that will form a tapered notched wedge in a single pass. Longitudinal joints constructed with a tapered notched wedge shall be compacted to a minimum relative compaction of 93 percent. If longitudinal joints are constructed in this manner, the Contractor shall conduct quality control testing in conformance with the provisions in Section 6-3.02, "Testing By Contractor," of the Standard Specifications, and provide results that include the following:

A. Relative compaction values of the completed longitudinal joints tested using a nuclear gauge which has been calibrated and correlated with core densities in conformance with the requirements in California Test 375 Parts 1 and 2.
B. Nuclear density values taken at the rate of one test for each 200-meter section along the completed longitudinal joint. The Contractor shall select random locations for testing within each 200-meter section.

C. Nuclear density values taken at the centerline of the completed longitudinal joint, 150 mm from the upper vertical notch after the adjacent lane is placed and prior to opening the pavement to traffic.
D. Maximum density test results.
E. Relative compaction values of the longitudinal joint determined as the ratio of the average of the nuclear density values taken from each 200-meter section and the maximum density test results.

Relative compaction values shall be determined each day the joint is completed and delivered to the Engineer within 24 hours of testing. If the relative compaction of one day's production is less than 90 percent, placement of the tapered notched wedge shall not continue until the Contractor has notified the Engineer of the adjustment that will be made in order to meet the specified relative compaction. If the relative compaction for 3 day's production is less than 90 percent, the Contractor shall notify the Engineer and suspend use of the tapered notched wedge device.

The Engineer will determine relative compaction values for the completed longitudinal joint at the completion of paving as follows:

A. The Engineer will determine relative compaction by using 150-mm diameter cores obtained within the 0.3-m section of pavement at the completed longitudinal joint.
B. The Contractor shall obtain two 150-mm diameter cores taken 150 mm from the upper vertical notch of the completed longitudinal joint for every 1000 m along the completed longitudinal joint at locations designated by the Engineer. Cores shall be obtained after the adjacent lane is placed and prior to opening the pavement to traffic. Cores shall be obtained in the presence of the Engineer and shall be marked to identify the test sites.
C. The Contractor shall deliver the cores to the Engineer. One core will be used for determination of the relative density and one core will be used for dispute resolution.
D. The Engineer will determine the bulk specific gravity of the cores in conformance with the requirements of California Test 308 Method A.
E. Relative compaction will be calculated as the ratio of the average of the core densities from each day's production to the maximum density test value determined in conformance with California Test 375, Part 6.

Quantities of asphalt concrete placed in the completed longitudinal joint that fail to meet the relative compaction requirements of these special provisions will be subject to reduced compensation. The reduction in compensation shall be determined as follows:

A. Quantity = 0.3 m x 1000 m x (thickness of the layer placed) x (maximum density test value) x (relative compaction value).
B. Reduction in compensation = Quantity x (reduction factor) x (contract item price).
C. The reduction factor will be determined using the following table:

| Relative Compaction (Percent) | Reduced Compensation Factor | Relative Compaction (Percent) | Reduced Compensation Factor |
|---|---|---|---|
| 93.0 | 0.000 | 91.4 | 0.062 |
| 92.9 | 0.002 | 91.3 | 0.068 |
| 92.8 | 0.004 | 91.2 | 0.075 |
| 92.7 | 0.006 | 91.1 | 0.082 |
| 92.6 | 0.009 | 91.0 | 0.090 |
| 92.5 | 0.012 | 90.9 | 0.098 |
| 92.4 | 0.015 | 90.8 | 0.108 |
| 92.3 | 0.018 | 90.7 | 0.118 |
| 92.2 | 0.022 | 90.6 | 0.129 |
| 92.1 | 0.026 | 90.5 | 0.142 |
| 92.0 | 0.030 | 90.4 | 0.157 |
| 91.9 | 0.034 | 90.3 | 0.175 |
| 91.8 | 0.039 | 90.2 | 0.196 |
| 91.7 | 0.044 | 90.1 | 0.225 |
| 91.6 | 0.050 | 90.0 | 0.300 |
| 91.5 | 0.056 | | |

Quantities of asphalt concrete placed in the completed longitudinal joint that meet the relative compaction requirements of these special provisions will not be measured as part of the quantity of asphalt concrete placed in the paved lane and will not be subject to reduced compensation or removal as determined by the relative compaction of the lane widths involved.

In addition to the cores taken every 1000 m along the completed longitudinal joint, the Contractor shall take 150-mm diameter cores every 3000 m approximately 0.9-m and 2.7 m perpendicular from the 1000 m core test sites. Cores may be taken on either side of the completed longitudinal joint. The Contractor shall mark core samples to identify the test sites. The Contractor shall determine the bulk specific gravity of each core in conformance with California Test 308 Method A and relative compaction as specified in these special provisions. Results of this testing shall be for reporting only.

## 10-1.38 GRIND EXISTING CONCRETE PAVEMENT

This work shall consist of grinding existing portland cement concrete as shown on the plans, as specified in Section 42-2, "Grinding," of the Standard Specifications and these special provisions, and as directed by the Engineer.

Grinding equipment for grinding concrete pavements shall use diamond blades mounted on a self-propelled machine designed for grinding and texturing concrete pavements. Grinding equipment that causes raveling, aggregate fracturing, or spalling, or that damages the transverse or longitudinal joints shall not be used.

Grinding shall be performed in the longitudinal direction of the traveled way and shall be done for the width shown on the plans so that the grinding begins and ends at lines perpendicular to the pavement centerline. Grinding on lane number one shall be done for the width shown on the plans.

Grinding concrete pavement shall result in a parallel corduroy texture consisting of grooves 2 mm to 3 mm wide with 183 to 193 grooves per meter width of grinding. Tops of ridges shall be between 1.5 mm and 2.0 mm from the bottom of the blade grooves.

The ground surface at transverse joints or cracks will be tested with a 3.6 m ± 0.06-m long straightedge laid on the pavement parallel with the centerline with its midpoint at the joint or crack. The surface shall not vary by more than 2 mm from the lower edge of the straightedge.

Cross-slope uniformity and positive drainage shall be maintained across the entire traveled way and shoulder. The cross-slope shall be uniform so that when tested with a 3.6 m ± 0.06-m long straightedge placed perpendicular to the centerline, the ground pavement surface shall not vary more than 6 mm from the lower edge of the straightedge.

After grinding has been completed, the pavement surface shall be profiled in conformance with the requirements of Section 40-1.10, "Final Finishing," of the Standard Specifications. Two profiles shall be obtained in each lane approximately one meter from the lane lines. The average profile index shall be determined by averaging the two profiles in each lane. Additional grinding shall be performed, where necessary, to bring the ground pavement surface within the Profile Index requirements specified in Section 40-1.10, "Final Finishing," of the Standard Specifications.

Full compensation for profiling the ground pavement surface with a California profilograph or equivalent and any necessary additional grinding to bring the finished surface within the specified tolerances and for furnishing final profilograms to the Engineer shall be considered as included in the contract price paid per square meter for grind existing concrete pavement and no additional compensation will be allowed therefor.

## 10-1.39 PILING

### GENERAL

Piling shall conform to the provisions in Section 49, "Piling," of the Standard Specifications, and these special provisions.

Unless otherwise specified, welding of any work performed in conformance with the provisions in Section 49, "Piling," of the Standard Specifications, shall be in conformance with the requirements in AWS D1.1.

Foundation recommendations are included in the "Information Handout" available to the Contractor as provided for in Section 2-1.03, "Examination of Plans, Specifications, Contract, and Site of Work," of the Standard Specifications.

Attention is directed to "Precast Concrete Quality Control" of these special provisions.

Attention is directed to "Welding" of these special provisions.

Difficult pile installation is anticipated due to the presence of dense soils, caving soils and the requirement of traffic control.

### CAST-IN-DRILLED-HOLE CONCRETE PILES

Cast-in-drilled-hole concrete piling shall conform to the provisions in Section 49-4, "Cast-In-Place Concrete Piles," of the Standard Specifications and these special provisions.

The provisions of "Welding" of these special provisions shall not apply to temporary steel casings.

**Materials**

The combined aggregate grading used in concrete for cast-in-drilled-hole concrete piling shall be either the 25-mm maximum grading, the 12.5-mm maximum grading, or the 9.5-mm maximum grading and shall conform to the requirements in Section 90-3 "Aggregate Gradings," of the Standard Specifications.

**Construction**

The Contractor shall submit a placing plan to the Engineer for approval prior to producing the test batch for cast-in-drilled-hole concrete piling and at least 10 working days prior to constructing piling. The plan shall include complete descriptions, details, and supporting calculations as listed below:

A. Requirements for all cast-in-drilled hole concrete piling:

1. Concrete mix design, certified test data, and trial batch reports.
2. Drilling or coring methods and equipment.
3. Proposed method for casing installation and removal when necessary.
4. Plan view drawing of pile showing reinforcement and inspection pipes, if required.
5. Methods for placing, positioning, and supporting bar reinforcement.
6. Methods and equipment for accurately determining the depth of concrete and actual and theoretical volume placed, including effects on volume of concrete when any casings are withdrawn.
7. Methods and equipment for verifying that the bottom of the drilled hole is clean prior to placing concrete.
8. Methods and equipment for preventing upward movement of reinforcement, including the Contractor's means of detecting and measuring upward movement during concrete placement operations.

If the Contractor drills the hole below the specified tip elevation, the reinforcement and the inspection pipes shall be extended to 75 mm clear of the bottom of the drilled hole.

**MEASUREMENT AND PAYMENT (PILING)**

Measurement and payment for the various types and classes of piles shall conform to the provisions in Sections 49-6.01, "Measurement," and 49-6.02, "Payment," of the Standard Specifications and these special provisions.

Full compensation for drilling oversized cast-in-drilled-hole concrete piling, filling cave-ins and oversized piles with concrete, and redrilling through concrete, shall be considered as included in the contract prices paid per meter for cast-in-drilled-hole concrete piling of the types and sizes listed in the Engineer's Estimate, and no additional compensation will be allowed therefor.

## 10-1.40 PRESTRESSING CONCRETE

Prestressing concrete shall conform to the provisions in Section 50, "Prestressing Concrete," of the Standard Specifications and these special provisions.

The details shown on the plans for cast-in-place prestressed box girder bridges are based on a bonded full length draped tendon prestressing system. For these bridges the Contractor may, in conformance with the provisions in Section 5-1.14, "Cost Reduction Incentive," of the Standard Specifications, propose an alternative prestressing system utilizing bonded partial length tendons provided the proposed system and associated details meet the following requirements:

A. The proposed system and details shall provide moment and shear resistances at least equal to those used for the design of the structure shown on the plans.
B. The concrete strength shall not be less than that shown on the plans.
C. Not less than 35 percent of the total prestressing force at any section shall be provided by full length draped tendons.
D. Anchorage blocks for partial length tendons shall be located so that the blocks will not interfere with the placement of the utility facilities shown on the plans or of any future utilities to be placed through openings shown on the plans.
E. Temporary prestressing tendons, if used, shall be detensioned, and the temporary ducts shall be filled with grout before completion of the work. Temporary tendons shall be either removed or fully encased in grout before completion of the work.
F. All details of the proposed system, including supporting checked calculations, shall be included in the drawings submitted in conformance with the provisions in Section 50-1.02, "Drawings," of the Standard Specifications.

Moments and shears for loads used in the design shown on the plans will be made available to the Contractor upon written request to the Engineer.

## 10-1.41 CONCRETE STRUCTURES

Portland cement concrete structures shall conform to the provisions in Section 51, "Concrete Structures," of the Standard Specifications and these special provisions.

### GENERAL

Attention is directed to "Precast Concrete Quality Control" of these special provisions.

Shotcrete shall not be used as an alternative construction method for reinforced concrete members unless otherwise specified.

Neoprene strip shall be furnished and installed at abutment backwall joint protection in conformance with the details shown on the plans, the provisions in the Standard Specifications, and these special provisions.

Furnishing and installing neoprene strip shall conform to the requirements for strip waterstops as provided in Section 51-1.145, "Strip Waterstops," of the Standard Specifications, except that the protective board will not be required.

### FALSEWORK

Falsework shall conform to the provisions in Section 51, "Concrete Structures," of the Standard Specifications and these special provisions.

Attention is directed to "Railroad Relations and Insurance" of these special provisions for additional requirements for falsework over railroads.

In addition to the provisions in Section 51-1.06A, "Falsework Design and Drawings," of the Standard Specifications, the time to be provided for the Engineer's review of the working drawings for specific structures, or portions thereof, shall be as follows:

| Structure or Portion of Structure | Total Review Time - Weeks |
|---|---|
| Wineville Road Undercrossing (Widen) Bridge No. 56-0601 | 4 |
| Mira Loma Overhead (Widen) Bridge No. 56-0602 | 10 |
| Etiwanda Ave Undercrossing (Widen) Bridge No. 56-0603 | 4 |
| Campbell Street Undercrossing (Widen) Bridge No. 56-0526 | 4 |
| Pyrite Street Undercrossing (Widen) Bridge No. 56-0528 | 4 |
| Camino Real Undercrossing (Widen) Bridge No. 56-0661 | 4 |

Temporary crash cushion modules, as shown on the plans and conforming to the provisions in "Temporary Crash Cushion Module" of these special provisions, shall be installed at the approach end of temporary railings which are located less than 4.6 m from the edge of a traffic lane. For 2-way traffic openings, temporary crash cushion modules shall be installed at the departing end of temporary railings which are located less than 1.8 m from the edge of a traffic lane.

#### Welding and Nondestructive Testing

Welding of steel members, except for previously welded splices and except for when fillet welds are used where load demands are less than or equal to 175 N/mm for each 3 mm of fillet weld, shall conform to AWS D1.1 or other recognized welding standard. The welding standard to be utilized shall be specified by the Contractor on the working drawings. Previously welded splices for falsework members are defined as splices made prior to the member being shipped to the project site.

Splices made by field welding of steel beams at the project site shall undergo nondestructive testing (NDT). At the option of the Contractor, either ultrasonic testing (UT) or radiographic testing (RT) shall be used as the method of NDT for each field weld and any repair made to a previously welded splice in a steel beam. Testing shall be performed at locations selected by the Contractor. The length of a splice weld where NDT is to be performed, shall be a cumulative weld length equal to 25 percent of the original splice weld length. The cover pass shall be ground smooth at the locations to be tested. The acceptance criteria shall conform to the requirements of AWS D1.1, Section 6, for cyclically loaded nontubular connections subject to tensile stress. If repairs are required in a portion of the weld, additional NDT shall be performed on the repaired sections. The NDT method chosen shall be used for an entire splice evaluation including any required repairs.

For all field welded splices, the Contractor shall furnish to the Engineer a letter of certification which certifies that all welding and NDT, including visual inspection, are in conformance with the specifications and the welding standard shown on the approved working drawings. This letter of certification shall be signed by an engineer who is registered as a Civil Engineer in the State of California and shall be provided prior to placing any concrete for which the falsework is being erected to support.

For previously welded splices, the Contractor shall determine and perform all necessary testing and inspection required to certify the ability of the falsework members to sustain the stresses required by the falsework design. This welding certification shall be in writing, shall be signed by an engineer who is registered as a Civil Engineer in the State of California, and shall be provided prior to placing any concrete for which the falsework is being erected to support.

The Contractor's engineer who signs the falsework drawings shall also certify in writing that the falsework is constructed in conformance with the approved drawings and the contract specifications prior to placing concrete. This certification shall include performing any testing necessary to verify the ability of the falsework members to sustain the stresses required by the falsework design. The engineer who signs the drawings may designate a representative to perform this certification. Where falsework contains openings for railroads, vehicular traffic, or pedestrians, the designated representative shall be qualified to perform this work, shall have at least three years of combined experience in falsework design or supervising falsework construction, and shall be registered as a Civil Engineer in the State of California. For other falsework, the designated representative shall be qualified to perform this work and shall have at least three years of combined experience in falsework design or supervising falsework construction. The Contractor shall certify the experience of the designated representative in writing and provide supporting documentation demonstrating the required experience if requested by the Engineer.

## COST REDUCTION INCENTIVE PROPOSALS FOR CAST-IN-PLACE PRESTRESSED BOX GIRDER BRIDGES

Except as provided herein, cast-in-place prestressed box girder bridges shall be constructed in conformance with the details shown on the plans and the provisions in Section 50, "Prestressing Concrete," and Section 51, "Concrete Structures," of the Standard Specifications.

If the Contractor submits cost reduction incentive proposals for cast-in-place prestressed box girder bridges, the proposals shall be in conformance with the provisions in Section 5-1.14, "Cost Reduction Incentive," of the Standard Specifications and these special provisions.

The Engineer may reject any proposal which, in the Engineer's judgment, may not produce a structure which is at least equivalent to the planned structure.

At the time the cost reduction incentive proposal (CRIP) is submitted to the Engineer, the Contractor shall also submit 4 sets of the proposed revisions to the contract plans, design calculations, and calculations from an independent checker for all changes involved in the proposal, including revisions in camber, predicted deck profile at each construction stage, and falsework requirements to the Office of Structure Design, Documents Unit, P.O. Box 942874, Sacramento, CA 94274-0001 (1801 30th Street, Sacramento, CA 95816), telephone (916) 227-8230. When notified in writing by the Engineer, the Contractor shall submit 12 sets of the CRIP plan revisions and calculations to the Office of Structure Design for final approval and use during construction. The calculations shall verify that all requirements are satisfied. The CRIP plans and calculations shall be signed by an engineer who is registered as a Civil Engineer in the State of California.

The CRIP plans shall be either 279 mm x 432 mm, or 559 mm x 864 mm in size. Each CRIP plan sheet and calculation sheet shall include the State assigned designations for the contract number, bridge number, full name of the structure as shown on the contract plans, and District-County-Route-Kilometer Post. Each CRIP plan sheet shall be numbered in the lower right hand corner and shall contain a blank space in the upper right hand corner for future contract sheet numbers.

Within 3 weeks after final approval of the CRIP plan sheets, one set of the corrected good quality prints on 75-g/m$^2$ (minimum) bond paper, 559 mm x 864 mm in size, of all CRIP plan sheets prepared by the Contractor for each CRIP shall be furnished to the Office of Structure Design, Documents Unit.

Each CRIP shall be submitted prior to completion of 25 percent of the contract working days and sufficiently in advance of the start of the work that is proposed to be revised by the CRIP to allow time for review by the Engineer and correction by the Contractor of the CRIP plans and calculations without delaying the work. The Contractor shall allow a minimum of 12 weeks for the review of a CRIP. In the event that several CRIPs are submitted simultaneously, or an additional CRIP is submitted for review before the review of a previously submitted CRIP has been completed, the Contractor shall designate the sequence in which the CRIPs are to be reviewed. In this event, the time to be provided for the review of any proposal in the sequence shall be not less than the review time specified herein for that proposal, plus 2 weeks for each CRIP of higher priority which is still under review.

Should the review not be complete by the date specified in the Contractor's CRIP, or such other date as the Engineer and Contractor may subsequently have agreed to in writing and if, in the opinion of the Engineer, the Contractor's controlling operation is delayed or interfered with by reason of the delay in review of CRIP plans and calculations, an extension of time commensurate with the delay in completion of the work thus caused will be granted as provided in Section 8-1.07,

"Liquidated Damages," of the Standard Specifications except that the provisions in Section 8-1.09, "Right of Way Delays," of the Standard Specifications shall not apply.

Permits and approvals required of the State have been obtained for the structures shown on the plans. Proposals which result in a deviation in configuration may require new permits or approvals. The Contractor shall be responsible for obtaining the new permits and approvals before the Engineer will reach a decision on the proposal. Delays in obtaining permits and approvals will not be reason for granting an extension of contract time.

All proposed modifications shall be designed in conformance with the bridge design specifications and procedures currently employed by the Department. The proposal shall include all related, dependent or incidental changes to the structure and other work affected by the proposal. The proposal will be considered only when all aspects of the design changes are included for the entire structure. Changes, such as but not limited to, additional reinforcement and changes in location of reinforcement, necessary to implement the CRIP after approval by the Engineer, shall be made at the Contractor's expense.

Modifications may be proposed in (1) the thickness of girder stems and deck slabs, (2) the number of girders, (3) the deck overhang dimensions as specified herein, (4) the amount and location of reinforcing steel, (5) the amount and location of prestressing force in the superstructure, and (6) the number of hinges, except that the number of hinges shall not be increased. The strength of the concrete used may be increased but the strength employed for design or analysis shall not exceed 42 MPa.

Modifications proposed to the minimum amount of prestressing force which must be provided by full length draped tendons are subject to the provisions in "Prestressing Concrete" of these special provisions.

No modifications will be permitted in (1) the foundation type, (2) the span lengths or (3) the exterior dimensions of columns or bridge superstructure, except that the overhang dimension from face of exterior girder to the outside edge of roadway deck may be uniformly increased or decreased by 25 percent on each side of the box girder section. Fixed connections at the tops and bottoms of columns shown on the plans shall not be eliminated.

The Contractor shall be responsible for determining construction camber and obtaining the final profile grade as shown on the plans.

The Contractor shall reimburse the State for the actual cost of investigating CRIPs for cast-in-place prestressed box girder bridges submitted by the Contractor. The Department will deduct this cost from any moneys due, or that may become due the Contractor under the contract, regardless of whether or not the proposal is approved or rejected.

**DECK CLOSURE POURS**

Where a deck closure pour is shown on the plans, reinforcement protruding into the closure space and forms for the closure pour shall conform to the following:

A. During the time of placement of concrete in the deck, other than for the closure pour itself, reinforcing steel which protrudes into the closure space shall be completely free from any connection to the reinforcing steel, concrete, or other attachments of the adjacent structure, including forms. The reinforcing steel shall remain free of any connection for a period of not less than 24 hours following completion of the pour.
B. Forms for the closure pour shall be supported from the superstructure on both sides of the closure space.

**SLIDING BEARINGS**

Sliding bearings consisting of elastomeric bearing pads lubricated with grease and covered with sheet metal shall conform to the following requirements:

A. Grease shall conform to the requirements of Military Specification: MIL-S-8660. A uniform film of grease shall be applied to the upper surface of the pads prior to placing the sheet metal.
B. Sheet metal shall be commercial quality galvanized sheet steel. The sheet metal shall be smooth and free of kinks, bends, or burrs.
C. Construction methods and procedures shall prevent grout or concrete seepage into the sliding bearing assembly.

**ELASTOMERIC BEARING PADS**

Elastomeric bearing pads shall conform to the provisions in Section 51-1.12H, "Elastomeric Bearing Pads," of the Standard Specifications.

**DECK CRACK TREATMENT**

The Contractor shall use all means necessary to minimize the development of shrinkage cracks.

The Contractor shall remove all equipment and materials from the deck and clean the surface as necessary for the Engineer to measure the surface crack intensity. Surface crack intensity will be determined by the Engineer after completion of concrete cure, before prestressing, and before the release of falsework. In any 50-$m^2$ portion of deck within the limits of the new concrete deck, should the intensity of cracking be such that there are more than 5 m of cracks whose width at any location exceeds 0.5-mm, the deck shall be treated with methacrylate resin. The area of deck to be treated shall have a width that extends for the entire width of new deck inside the concrete barriers and a length that extends at least 1.5 m beyond the furthest single continuous crack outside the 50-$m^2$ portion, measured from where that crack exceeds 0.5-mm in width, as determined by the Engineer.

Deck crack treatment shall consist of test sealing, and furnishing and applying methacrylate resin in conformance with the requirements of these special provisions. If grinding operation is required, deck treatment shall take place before grinding.

Before the start of deck treatment work, the Contractor shall submit for approval by the Engineer, a program for public safety associated with the use of methacrylate resin. The program shall identify materials, equipment, and methods to be used. The Contractor shall not perform deck treatment work, other than that specifically authorized in writing by the Engineer, until the program has been approved.

If the measures being taken by the Contractor are inadequate to provide for public safety associated with use of methacrylate resin, the Engineer will direct the Contractor to revise the operations and the public safety program. Directions for revisions will be in writing and will specify the items in which the Contractor's program is inadequate. No further deck treatment shall be performed until public safety measures are adequate, and a revised program for public safety has been approved.

The Engineer will notify the Contractor of the approval or rejection of any submitted or revised program for public safety associated with the use of methacrylate resin within 10 working days of receipt of the final submitted program.

The State will not be liable to the Contractor for failure to approve all or any portion of an originally submitted or revised program for public safety associated with the use of methacrylate resin, nor for any delays to the work due to the Contractor's failure to submit an acceptable program for public safety associated with the use of methacrylate resin. If the Engineer does not review or approve the program submitted by the Contractor within the time specified and if, in the opinion of the Engineer, the Contractor's controlling operation is delayed or interfered with by reason of the delay in reviewing the program for public safety, the delay will be considered a right of way delay in conformance with the provisions in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

**Materials**

The material used for treating the deck shall be a low odor, high molecular weight methacrylate resin. Before adding initiator, the resin shall have a maximum volatile content of 30 percent when tested in conformance with the requirements in ASTM Designation: D 2369, and shall conform to the following:

| PROPERTY | TEST METHOD | REQUIREMENT |
|---|---|---|
| Viscosity Pa·s, maximum, (Brookfield RVT with UL adaptor, 50 RPM at 25°C) | ASTM D 2196 | 0.025 |
| Specific Gravity minimum, at 25°C | ASTM D 1475 | 0.90 |
| Flash Point °C, minimum | ASTM D 3278 | 82 |
| Vapor Pressure mm Hg, maximum, at 25°C | ASTM D 323 | 1.0 |
| Tack-free time minutes, maximum at 25°C | California Test 551 | 400 |
| PCC Saturated Surface-Dry Bond Strength MPa, minimum at 24 hours and 21±1°C | California Test 551 | 3.5 |
| * Test shall be performed before adding initiator. | | |

A Material Safety Data Sheet shall be furnished before use for each shipment of high molecular weight methacrylate resin.

The promoter and initiator, if supplied separately from the resin, shall not be mixed directly with each other. Containers of promoters and initiators shall not be stored together in a manner that will allow leakage or spillage from one to contact the containers or material of the other.

**Testing**

The Contractor shall allow 14 days for sampling and testing by the Engineer of the high molecular weight methacrylate resin before proposed use.

The Contractor shall treat a test area within the project limits of approximately 50 $m^2$ at a location approved by the Engineer. Conditions during the test treatment shall be similar to those expected on the deck. Equipment used in the test shall be similar to those used for the deck treating operations. If the test area is on the traveled way, traffic shall not be allowed on the treated test area until (1) the treated surface is tack free (non-oily), (2) the sand cover adheres sufficiently to resist brushing by hand, and (3) the coefficient of friction of the deck is at least 0.35 when tested in conformance with the requirements in California Test 342.

Should the above requirements for traffic use not be met, the Contractor shall suspend treating of bridge decks until another test area is treated and complies with the requirements.

**Construction**

Before deck treatment with methacrylate resin, the bridge deck surface shall be cleaned by abrasive blasting and all loose material shall be blown from visible cracks using high-pressure air. Concrete curing seals shall be cleaned from the deck surface to be treated, and the deck shall be dry when blast cleaning is performed. If the deck surface becomes contaminated at any time before placing the penetrating sealer, the deck surface shall be cleaned by abrasive blasting.

Equipment shall be fitted with suitable traps, filters, drip pans, or other devices as necessary to prevent oil or other deleterious material from being deposited on the deck.

Where abrasive blasting is being performed within 3 m of a lane occupied by public traffic, the residue including dust shall be removed immediately after contact between the abrasive and the surface being treated. The removal shall be by a vacuum attachment operating concurrently with the abrasive blasting operation.

The relative humidity shall be less than 90 percent at time of treatment.

A compatible promoter/initiator system shall be capable of providing a resin gel time of not less than 40 minutes nor more than 1.5 hours at the temperature of application. Gel time shall be adjusted to compensate for the changes in temperature throughout treatment application.

The quantity of resin mixed with promoter and initiator shall be limited to 20 L at a time for manual application.

Machine application of the resin shall be performed by using a two-part resin system using a promoted resin for one part and an initiated resin for the other part. This two-part resin system shall be combined at equal volumes to the spray bars through separate positive displacement pumps. Combining of the 2 components shall be by either static in-line mixers or by external intersecting spray fans. The pump pressure at the spray bars shall not be great enough to cause appreciable atomization of the resin. Compressed air shall not be used to produce the spray. A shroud shall be used to enclose the spray bar apparatus. Hand held spray apparatus shall not be used.

The Contractor shall allow methacrylate resin to be applied only to the specified area. Barrier rails, joints, and drainage facilities shall be adequately protected to prevent contamination by the treatment material. Contaminated items shall be repaired at the Contractor's expense.

The prepared area shall be dry and the surface temperature shall be less than or equal to 38°C when the resin is applied. The rate of application of promoted/initiated resin shall be approximately 2.5 square meters per liter, ± 0.1 square meter per liter.

The deck surfaces to be treated shall be flooded with resin, allowing penetration into the concrete and filling of all cracks. The treatment shall be applied within 5 minutes after complete mixing. A significant increase in viscosity shall be cause for rejection. Excess material shall be redistributed by squeegees or brooms within 10 minutes after application.

After the resin has been applied, at least 20 minutes shall elapse before applying sand. The sand shall be commercial quality dry blast sand. Ninety-five percent of the sand shall pass the 2.36-mm sieve, and 95 percent shall be retained on the 850-µm sieve. The sand shall be applied at a rate of one kilogram per square meter, ± 0.1 kilogram per square meter.

Excess sand shall be removed from the deck surface by vacuuming or sweeping before opening to traffic.

Traffic shall not be allowed on the treated area until (1) the treated surface is tack free (non-oily), (2) the sand cover adheres sufficiently to resist brushing by hand, and (3) the coefficient of friction of the deck is at least 0.35 when tested in conformance with the requirements in California Test 342.

**MEASUREMENT AND PAYMENT**

Measurement and payment for concrete in structures shall conform to the provisions in Section 51-1.22, "Measurement," and Section 51-1.23, "Payment," of the Standard Specifications and these special provisions.

The contract price paid per cubic meter for structural concrete, barrier slab shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing barrier slabs, complete in place, including furnishing and placing all bar reinforcing steel, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Full compensation for deck crack treatment, including a program for public safety, shall be considered as included in the contract price paid per cubic meter for structural concrete (bridge) and no additional compensation will be allowed therefor.

**10-1.42 PTFE BEARING**

PTFE bearings, consisting of steel reinforced elastomeric bearing pads, polytetrafluoroethylene (PTFE) surfacing, and stainless steel and steel plates, shall conform to the details shown on the plans, the provisions in Section 51, "Concrete Structures," of the Standard Specifications, and these special provisions.

The Contractor shall submit working drawings for the PTFE bearings to the Office of Structure Design, (OSD) for approval in conformance with the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications. For initial review, 4 sets of working drawings shall be submitted. After review, between 6 and 12 sets, as requested by the Engineer, shall be submitted to OSD for final approval and for use during construction.

Working drawings shall be 279 mm x 432 mm in size, and each drawing and calculation sheet shall include the name of the structure as shown on the contract plans, District-County-Route, bridge number, and contract number.

Working drawings shall be submitted sufficiently in advance of the start of the affected work to allow time for review by the Engineer and correction by the Contractor of the drawings without delaying the work. The time shall be proportional to the complexity of the work but in no case shall the time be less than 6 weeks after complete drawings and all support data are submitted. The location of match marks on plate edges shall be shown on the working drawings.

At the completion of each structure on the contract, one set of prints on 75-g/m$^2$ (minimum) bond paper, 279 mm x 432 mm in size, of the corrected original tracings of all working drawings for each structure shall be furnished to the Engineer. Prints of drawings which are common to more than one structure shall be submitted for each structure. An index prepared specifically for the drawings for each structure containing sheet numbers and titles shall be included on the first print in the set for each structure. Prints for each structure shall be arranged in the order of drawing numbers shown in the index.

The edge of the corrected original tracing image shall be clearly visible and visually parallel with the edges of the page. A clear, legible symbol shall be provided as near to the upper left side of each page as is feasible within the original print to show the amount of reduction and a horizontal and vertical scale shall be provided on each reduced print to facilitate enlargement to original scale.

The manufacturer shall furnish Certificates of Compliance in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications, for all material used in the PTFE bearings.

The shear modulus of the elastomer in the elastomeric bearing pads shall be 750±75 kPa.

PTFE sheet shall be made from unfilled PTFE resin and shall conform to the following requirements:

| Test | Test Method | Requirements |
|---|---|---|
| Tensile strength (Minimum) | ASTM D 4894 or D 4895 | 19.3 MPa |
| Elongation (Minimum) | ASTM D 4894 or D 4895 | 200 % |

The PTFE resin shall be virgin material (not reprocessed) meeting the requirements of ASTM Designation: D 4894 or D 4895, with a minimum thickness of 6 mm. Specific gravity shall be from 2.13 to 2.19. Melting point shall be 327±10°C.

The PTFE sliding surface shall be provided with lubricant dimples with a maximum diameter of 8 mm, a minimum depth of 2 mm, and a maximum depth of one half of the PTFE sheet thickness. The dimples shall be uniformly distributed within the area 6 mm from the edges of the PTFE sheet and occupy between 20 percent and 30 percent of the PTFE sheet area.

Stainless steel plates shall conform to the requirements of ASTM Designation: A 240, Type 304, with a minimum thickness of 3 mm.

Steel plates, except stainless steel, shall conform to the requirements of ASTM Designation: A 36/A 36M.

Welding of structural steel shall conform to the requirements of AWS D1.1. Welding of structural steel to stainless steel shall conform to the requirements of AWS D1.6.

The PTFE sheet shall be adhesive bonded in the recess of steel plate under controlled factory conditions. The adhesive material shall be an epoxy resin conforming to the requirements of Federal Specification: MMM-A-134.

Contact surfaces of PTFE sheet and steel plate to be bonded shall be uniformly roughened to a minimum roughness height value of 6.3 µm.

The side of the PTFE sheet to be bonded shall be factory treated by the sodium naphthalene or sodium ammonia process, after the contact surface is roughened.

After completion of the bonding operation the PTFE surface shall be smooth and free from bubbles. The PTFE sheet shall show no signs of delamination and shall be fully bonded within the recess.

The stainless steel plate shall be attached by perimeter welding using Type 309L electrodes. After completion of the weld operation, the stainless steel plate shall be smooth and free from waves.

The flatness of the bearing elements shall be controlled such that upon completion of the bearing assembly, the PTFE/stainless steel sliding interface shall be in full bearing.

The mating surface of the stainless steel plate with the PTFE surfacing shall have a minimum #8 mirror finish determined according to ANSI Standard B46.1. The sliding element of the production bearings shall have a first movement static coefficient of friction not exceeding 0.06 when tested without the coating of silicone grease.

Steel reinforced elastomeric bearing pads shall be fully vulcanized to the steel plates under factory controlled conditions, and the bond shall have a peel-strength of at least 5.3 Newtons per millimeter as determined by California Test 663.

Metal surfaces of bearings exposed to the atmosphere and in contact with the structure in the completed work, except stainless steel surfaces, shall be cleaned and painted in conformance with the provisions in Sections 59-2, "Painting Structural Steel," and 91, "Paint" of the Standard Specifications, and "Clean and Paint Structural Steel" of these special provisions.

Certification in conformance with the requirements in SSPC-QP 1, SSPC-QP 2, and SSPC-QP 3 of the "SSPC: The Society for Protective Coatings" will not be required for cleaning and painting PTFE bearings.

Finish coats will not be required on the bearings.

After installation, the top of the assembly shall be removed and a 1.5 mm thick coating of silicone grease shall be applied to the entire PTFE surface and the bearing reassembled without damage to the mating sliding surfaces. Silicone grease shall conform to the requirements in Military Specification: MIL-S-8660.

Damaged bearings and bearings with scratched mating surfaces shall be returned to the factory for replacement or resurfacing.

Prior to proof testing or painting, all individual components shall be permanently die-stamped on 2 of 4 sides with markings consisting of bearing number and contract number. Each bearing shall have a unique bearing number and match marks on plate edges to insure correct assembly at the job site.

Full sized PTFE bearings shall be proof tested and evaluated for compression and coefficient of initial static friction in the presence of the Engineer. The proof tests shall be performed on samples randomly selected by the Engineer from the production bearings to be used in the work. Proof testing shall be performed by the Contractor at the manufacturer's plant or at an approved laboratory. If proof tests can not be performed at the specified load, the Contractor shall submit to the Engineer for review and approval a testing plan listing additional physical tests. These tests shall be performed in the

presence of the Engineer, and shall demonstrate that the requirements for proof testing at the specified load are satisfied. The Contractor shall give the Engineer at least 7 days notice before beginning proof testing. Proof testing of PTFE bearings shall conform to the following requirements:

A. One bearing per lot of production PTFE bearings shall be proof tested. A lot is defined as 25 PTFE bearings or fraction thereof of the same type, within a load category.
B. A load category shall consist of bearings of differing vertical load capacity within a range defined as follows:

1. Bearings with less than or equal to 2225 kN maximum vertical load capacity.
2. Bearings with greater than 2225 kN but less than or equal to 8900 kN maximum vertical load capacity.

- Bearings with greater than 8900 kN maximum vertical load capacity.

C. Bearings shall be proof tested for compression and coefficient of friction.
D. Proof tests for compression: The bearing shall be held for one hour at 1.5 times the maximum vertical load shown on the plans for the bearing.
E. Proof tests for coefficient of friction: The tests shall be performed at the minimum dead load shown on the plans for the bearing with the test load applied for 12 hours continuously and the test load shall not be reduced or removed prior to friction measurement and the following:

1. The tests shall be arranged to allow measurement of the static coefficient of friction on the first movement of the bearing.
2. The first movement static and dynamic coefficients of friction shall be measured at a sliding speed not exceeding 25 millimeters per minute and shall not exceed the specified coefficient of initial static friction.
3. The test bearings shall be subjected to a minimum of 100 movements of at least 25 mm of relative movement at a sliding speed not exceeding 300 millimeters per minute. After cycling, the first movement static and dynamic coefficients of friction shall be measured again at a sliding speed not exceeding 25 millimeters per minute and shall not exceed the specified coefficient of initial static friction.

F. The bearing surfaces shall be cleaned prior to testing.
G. Proof testing of bearings shall be done after conditioning specimens for 12 hours at 24°±3°C.
H. The proof tested bearings shall show no visible sign of: (1) bond failure of bearing surfaces, (2) separation or lift-off of plates from each other or from PTFE surfaces, (3) excessive transfer of PTFE to the stainless steel surface, or (4) other defects. When a proof tested bearing fails to comply with these specifications, all bearings in that lot shall be individually tested for acceptance.
I. Proof test results shall be certified correct and signed by the testing laboratory personnel who conducted the test and interpreted the test results. Proof test results shall include the bearing numbers of the bearings tested.

One sample of elastomeric bearing pad, 57±3 mm high and not less than 200 mm x 300 mm in plan, shall be cut by the manufacturer from one of the thickest production elastomeric bearing pads, as directed by the Engineer, and furnished to the Transportation Laboratory. The Contractor shall allow 3 weeks for testing and obtaining satisfactory results after the sample elastomeric bearing pad has been received.

A test specimen taken from the sample furnished to the Transportation Laboratory will be tested in conformance with the requirements in California Test 663 for 10,000 cycles at the design load and 1/2 T (T = total thickness of elastomer) translation. The testing speed shall not exceed 115 millimeters per minute. Specimens tested shall show no indication of deterioration of elastomer or loss of bond between the elastomer and steel laminates.

PTFE bearing sole plates shall be temporarily supported during concrete placement. Temporary supports shall prevent the rotation or displacement of the bearings during concrete placing operations. Temporary supports shall not inhibit the functioning of the PTFE bearings after concrete is placed. Temporary supports shall not restrict the movement at bridge joints due to temperature changes and shortening from prestress forces. Materials for temporary supports within the limits for placing concrete shall conform to the requirements for form fasteners.

PTFE and stainless steel surfaces shall be protected from contamination and weather damage.

Quantities of PTFE bearings will be determined as units from actual count in the completed work. A PTFE bearing with more than one disc shall be considered a single PTFE bearing.

The contract unit price paid for PTFE bearing shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing the bearing, complete in place, including temporary supports, proof testing, and cleaning and painting of PTFE bearings, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Full compensation for furnishing the sample of elastomeric bearing pad shall be considered as included in the contract unit price paid for PTFE bearing, and no separate payment will be made therefor.

If a portion or all of PTFE bearings are either fabricated or tested at a site more than 480 air line kilometers from both Sacramento and Los Angeles, additional shop inspection expenses will be sustained by the State. Whereas it is and will be impractical and extremely difficult to ascertain and determine the actual increase in such expenses, it is agreed that payment to the Contractor for PTFE bearings will be reduced $5,000 for each fabrication or testing site located more than 480 air line kilometers from both Sacramento and Los Angeles and an additional $10,000 ($15,000 total) for each fabrication or testing site located more than 4800 air line kilometers from both Sacramento and Los Angeles.

## 10-1.43 STRUCTURE APPROACH SLABS (Type N)

This work shall consist of constructing reinforced concrete approach slabs, and treated permeable base at structure approaches in conformance with the details shown on the plans, the provisions in Section 51, "Concrete Structures," of the Standard Specifications, and these special provisions.

### GENERAL

Attention is directed to "Engineering Fabrics" of these special provisions.

### ENGINEERING FABRICS

Filter fabric to be placed between the structure approach embankment material and the treated permeable base shall conform to the provisions for filter fabric for edge drains in Section 88, "Engineering Fabrics," of the Standard Specifications and these special provisions.

The subgrade to receive the filter fabric, immediately prior to placing, shall conform to the compaction and elevation tolerance specified for the material involved.

Filter fabric shall be aligned, handled, and placed in a wrinkle-free manner in conformance with the manufacturer's recommendations.

Adjacent borders of the filter fabric shall be overlapped from 300 to 450 mm or stitched. The preceding roll shall overlap the following roll in the direction the material is being spread or shall be stitched. When the fabric is joined by stitching, it shall be stitched with yarn of a contrasting color. The size and composition of the yarn shall be as recommended by the fabric manufacturer. The number of stitches per 25 mm of seam shall be 5 to 7.

Equipment or vehicles shall not be operated or driven directly on the filter fabric.

### TREATED PERMEABLE BASE UNDER APPROACH SLAB

Treated permeable base under structure approach slabs shall consist of constructing either an asphalt treated permeable base or a cement treated permeable base in accordance with Section 29, "Treated Permeable Bases," of the Standard Specifications and these special provisions.

The type of treatment, asphalt or cement, to be used shall be at the option of the Contractor.

The Contractor shall notify the Engineer in writing, not less than 30 days prior to the start of placing the treated permeable base, which type of treated permeable base will be furnished. Once the Contractor has notified the Engineer of the selection, the type to be furnished shall not be changed without a prior written request to do so and approval thereof in writing by the Engineer.

Asphalt treated permeable base shall be placed at a temperature of not less than 93°C nor more than 121°C. Material stored in excess of 2 hours shall not be used in the work.

Asphalt treated permeable base material may be spread in one layer. The base material shall be compacted with a vibrating shoe type compactor or rolled with a roller weighing at least 1.3 tonnes but no more than 4.5 tonnes. Rolling shall begin as soon as the mixture has cooled sufficiently to support the weight of the rolling equipment without undue displacement.

Cement treated permeable base material may be spread in one layer. The base material shall be compacted with either a vibrating shoe type compactor or with a steel-drum roller weighing at least 1.3 tonnes but no more than 4.5 tonnes. Compaction shall follow within one-half hour after the spreading operation and shall consist of 2 complete coverages of the treated material.

### APPROACH SLABS

Concrete for use in approach slabs shall contain not less than 400 kilograms of cementitious material per cubic meter.

Steel components of abutment ties including plates, nuts, washers, and rods shall conform to the provisions in Section 75-1.03, "Miscellaneous Bridge Metal," of the Standard Specifications.

Structure approach slabs shall be cured for not less than 5 days prior to opening to public traffic, unless, at the option of the Contractor, the structure approach slabsare constructed using concrete with a non-chloride Type C chemical admixture conforming to these special provisions.

Portland cement for use in concrete using a non-chloride Type C chemical admixture shall be Type II Modified, Type II Prestress, or Type III. Type II Modified and Type III cement shall conform to the provisions in Section 90-2.01, "Cement," of the Standard Specifications. Type II Prestress cement shall conform to the requirements of Type II Modified cement, except the mortar containing the portland cement to be used and Ottawa sand, when tested in conformance with California Test 527, shall not contract in air more than 0.053-percent.

The non-chloride Type C chemical admixture, approved by the Engineer, shall conform to the requirements in ASTM Designation: C 494 and Section 90-4, "Admixtures," of the Standard Specifications.

The concrete with non-chloride Type C chemical admixture shall be prequalified prior to placement in conformance with the provisions for prequalification of concrete specified by compressive strength in Section 90-9.01, "General," of the Standard Specifications and the following:

A. Immediately after fabrication of the 5 test cylinders, the cylinders shall be stored in a temperature medium of 21 ± 1.5°C until the cylinders are tested.
B. The 6-hour average strength of the 5 test cylinders shall not be less than 5.85 MPa. No more than 2 test cylinders shall have a strength of less than 5.5 MPa.

Building paper shall be commercial quality No. 30 asphalt felt.

Polyvinyl chloride (PVC) conduit used to encase the abutment tie rod shall be of commercial quality.

The top surface of approach slabs shall be finished in conformance with the provisions in Section 51-1.17, "Finishing Bridge Decks," of the Standard Specifications. Edges of slabs shall be edger finished.

Approach slabs shall be cured with pigmented curing compound (1) in conformance with the provisions for curing structures in Section 90-7.01B, "Curing Compound Method," of the Standard Specifications.

Structure approach slabs constructed using concrete with a non-chloride Type C chemical admixture shall be cured for not less than 6 hours prior to opening to public traffic. The curing period shall be considered to begin at the start of discharge of the last truck load of concrete to be used in the slab.

If the ambient temperature is below 18°C during the curing period for approach slabs using concrete with a non-chloride Type C chemical admixture, an insulating layer or blanket shall be used to cover the surface. The insulating layer or blanket shall have an R-value rating given in the table below. At the Contractor's option, a heating tent may be used in lieu of or in combination with the insulating layer or blanket.

| Temperature range during curing period | R-value, minimum |
|---|---|
| 13°C to 18°C | 1 |
| 7°C to 13°C | 2 |
| 4°C to 7°C | 3 |

**JOINTS**

Hardboard and expanded polystyrene shall conform to the provisions in Section 51-1.12D, "Sheet Packing, Preformed Pads and Board Fillers," of the Standard Specifications.

Type AL joint seals shall conform to the provisions in Section 51-1.12F, "Sealed Joints" of the Standard Specifications. The sealant may be mixed by hand-held power-driven agitators and placed by hand methods.

**MEASUREMENT AND PAYMENT**

Structural concrete, approach slab (Type N) will be measured and paid for in conformance with the provisions in Section 51-1.22, "Measurement," and Section 51-1.23, "Payment," of the Standard Specifications and these special provisions.

Full compensation for treated permeable base, fiter fabric and miscellaneous metal shall be considered as included in the contract price paid per cubic meter for structural concrete, approach slab of the type shown in the Engineer's Estimate, and no additional compensation will be allowed therefor.

## 10-1.44 STRUCTURE APPROACH SLABS (TYPE R)

Structure approach slabs (Type R) shall consist of removing portions of existing structures, existing pavement and base including reinforced concrete approach slabs, asphalt concrete surfacing, portland cement concrete pavement, subsealing material, and cement treated base and constructing new reinforced concrete approach slabs at structure approaches as shown on the plans and in conformance with these special provisions.

## GENERAL

The thickness shown on the plans for structure approach slabs is the minimum thickness. The thickness will vary depending on the thickness of the pavement and base materials removed.

Where pavement subsealing has been performed under existing approach slabs, the subsealing material shall be removed for its full depth. Where removal of cement treated base is required to construct the approach slab, the entire thickness of the cement treated base shall be removed.

Voids between the new reinforced structure approach slab and the base material remaining in place that are caused by removal of subsealing material or cement treated base shall be filled, at the option of the Contractor, with aggregate base (approach slab) or structure approach slab concrete.

The Contractor shall establish a grade line for new approach slabs which shall provide a smooth profile grade. The profile grade will be subject to the approval of the Engineer.

The Contractor shall schedule his operations so that the pavement and base materials removed during a work period shall be replaced, in that same work period, with approach slab concrete that shall be cured for at least 6 hours prior to the time the lane is to be opened to public traffic as designated in "Maintaining Traffic" of these special provisions. In the event the existing pavement and base materials are removed and the Contractor is unable to construct, finish, and cure the new approach slab by the time the lane is to be opened to public traffic, the excavation shall be filled with a temporary roadway structural section as specified in this section, "Structure Approach Slabs (Type R)."

## TEMPORARY ROADWAY STRUCTURAL SECTION

A standby quantity of asphalt concrete and aggregate base, equal to the quantity of pavement removed during the work shift, shall be provided at the project site for construction of a temporary roadway structural section where existing approaches to structures are being replaced. The temporary structural section shall be maintained and later removed as a first order of work when the Contractor is able to construct and cure the approach slab within the prescribed time limit. The temporary structural section shall consist of 90-mm thick layer of asphalt concrete over aggregate base.

The aggregate base for the temporary structural section shall conform to the requirements specified under "Aggregate Base (Approach Slab)" of these special provisions.

The asphalt concrete for the temporary structural section shall be produced from commercial quality aggregates and asphalt binder. The grading of the aggregate shall conform to the 19-mm maximum medium grading in Section 39-2.02, "Aggregate," of the Standard Specifications and the asphalt binder shall conform to the requirements of liquid asphalt SC-800 in Section 93, "Liquid Asphalts," of the Standard Specifications. The amount of asphalt binder to be mixed with the aggregate shall be approximately 0.3-percent less than the optimum bitumen content as determined by California Test 367.

Aggregate base and asphalt concrete for the temporary structural section shall be spread and compacted by methods that will produce a well-compacted, uniform base, free from pockets of coarse or fine material and a surfacing of uniform smoothness, texture, and density. The aggregate base and the asphalt concrete may each be spread and compacted in one layer. The finished surface of the asphalt concrete shall not vary more than 15 mm from the lower edge of a 3.6-m straightedge placed parallel with the centerline and shall match the elevation of the existing concrete pavement and structure along the joints between the existing pavement and structure and the temporary surfacing.

The material from the removed temporary structural section shall be disposed of in conformance with Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications except that removed aggregate base may be stockpiled at the project site and reused for construction of another temporary structural section. When no longer required, standby material or stockpiled material for construction of temporary structural sections shall be removed and disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

## REMOVING EXISTING PAVEMENT AND BASE MATERIALS

The outline of portland cement concrete to be removed shall be sawed full depth with a power-driven concrete saw.

The outlines of excavations in asphalt concrete shall be cut on a neat line to a minimum depth of 75 mm with a power-driven concrete saw or wheel-type rock cutting excavator before any asphalt concrete material is removed. These excavations shall be permanently or temporarily backfilled to conform to the grade of the adjacent pavement prior to opening the lane to public traffic. Surplus excavated material may be used as temporary backfill material.

Regardless of the type of equipment used to remove concrete within the sawed outline, the surface of the concrete to be removed shall not be impacted within 0.5-m of the pavement to remain in place. Removing existing pavement and base materials shall be performed without damage to the adjacent structure or pavement that is to remain in place. Damage to the structure or to the pavement that is to remain in place shall be repaired in conformance with the provisions in Section 7-1.11, "Preservation of Property," of the Standard Specifications.

Materials removed shall be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

The base material remaining in-place, after removing the existing pavement and base materials to the required depth, shall be graded uniformly, watered, and compacted. The finished surface of the base material at any point shall not extend above the grade approved by the Engineer.

Areas of the base material that are low as a result of over excavation shall be filled, at the Contractor's expense, with structure approach slab concrete at the time and in the same operation that the new concrete is placed.

**AGGREGATE BASE (APPROACH SLAB)**

The aggregate base (approach slab) for filling voids below the reinforced structure approach slab concrete shall be produced from commercial quality aggregates consisting of broken stone, crushed gravel or natural rough-surfaced gravel, and sand, or any combination thereof. The grading of the aggregate base shall conform to the 19-mm maximum grading specified in Section 26-1.02A, "Class 2 Aggregate Base," of the Standard Specifications.

Aggregate base (approach slab) for filling voids below the reinforced structure approach slab concrete shall be spread and compacted by methods that will produce a well-compacted, uniform base, free from pockets of coarse or fine material. The aggregate base shall be watered and compacted to the grade approved by the Engineer. Where the required thickness of aggregate base is 200 mm or less, the base may be spread and compacted in one layer. Where the required thickness of aggregate base is more than 200 mm, the base shall be spread and compacted in 2 or more layers of approximately equal thickness. The maximum compacted thickness of any one layer shall not exceed 200 mm. The finished surface of the base material at any point shall not extend above the grade approved by the Engineer. Areas of the base material that are lower than the grade approved by the Engineer, shall be filled with structure approach slab concrete at the time and in the same operation that the new concrete is placed.

**STRUCTURE APPROACH SLAB**

Reinforced concrete approach slabs shall conform to the provisions for approach slabs in Section 51, "Concrete Structures," of the Standard Specifications and these special provisions.

Concrete for use in approach slabs shall contain not less than 400 kg of cementitious material per cubic meter.

Steel components of abutment ties including plates, nuts, washers, and rods shall conform to the provisions in Section 75-1.03, "Miscellaneous Bridge Metal," of the Standard Specifications.

The steel angles at the concrete barrier joint shall conform to the provision in Section 75-1.03, "Miscellaneous Bridge Metal," of the Standard Specifications.

Approach slab concrete that requires a minimum curing period of 6 hours shall be constructed using a non-chloride Type C chemical admixture. Mineral admixture will not be required in this concrete.

Portland cement for use in concrete using a non-chloride Type C chemical admixture shall be Type II Modified, Type II Prestress, or Type III. Type II Modified and Type III cement shall conform to the provisions in Section 90-2.01, "Cement," of the Standard Specifications. Type II Prestress cement shall conform to the requirements of Type II Modified cement, except the mortar containing the portland cement to be used and Ottawa sand, when tested in conformance with California Test 527, shall not contract in air more than 0.053-percent.

The non-chloride Type C chemical admixture shall be approved by the Engineer and shall conform to the requirements in ASTM Designation: C 494 and Section 90-4, "Admixtures," of the Standard Specifications.

The concrete with non-chloride Type C chemical admixture shall be prequalified prior to placement in conformance with the provisions for prequalification of concrete specified by compressive strength in Section 90-9.01, "General," of the Standard Specifications and the following:

A. Immediately after fabrication of the 5 test cylinders, the cylinders shall be stored in a temperature medium of 21 ± 1.5°C until the cylinders are tested.
B. The 6-hour average strength of the 5 test cylinders shall not be less than 5.85 MPa. No more than 2 test cylinders shall have a strength of less than 5.5 MPa.

Building paper shall be commercial quality No. 30 asphalt felt.

Polyvinyl chloride (PVC) conduit used to encase the abutment tie rod shall be commercial quality.

Bar reinforcement or abutment tie rods in drilled holes shall be bonded in conformance with the provisions for drilling and bonding dowels in Section 83-2.02D(1), "General," of the Standard Specifications.

If reinforcement is encountered during drilling before the specified depth is attained, the Engineer shall be notified. Unless the Engineer approves coring through the reinforcement, the hole will be rejected and a new hole, in which reinforcement is not encountered, shall be drilled adjacent to the rejected hole to the depth shown on the plans.

The top surface of approach slabs shall be finished in conformance with the provisions in Section 51-1.17, "Finishing Bridge Decks," of the Standard Specifications. The finished top surface shall not vary more than 6 mm from the lower edge of a 3.6-m straightedge placed parallel with the centerline. Edges of slabs shall be edger finished.

The surface of the approach slab will not be profiled and the Profile Index requirements shall not apply.

Approach slabs shall be cured with pigmented curing compound (1) in conformance with the provisions for curing structures in Section 90-7.01B, "Curing Compound Method," of the Standard Specifications. The minimum curing period as specified herein shall be considered to begin at the start of discharge of the last truck load of concrete to be used in the slab. Fogging of the surface with water after the curing compound has been applied will not be required. Should the film of curing compound be damaged from any cause before the approach slab is opened to public traffic, the damaged portion shall be repaired immediately with additional compound, at the Contractor's expense. Damage to the curing compound after the approach slab is opened to public traffic shall not be repaired.

If the ambient temperature is below 18°C during the curing period, an insulating layer or blanket shall cover the surface. The insulation layer or blanket shall have an R-value rating given in the table below. At the Contractor's option, a heating tent may be used in lieu of or in combination with the insulating layer or blanket:

| Temperature range during curing period | R-value, minimum |
|---|---|
| 13°C to 18°C | 1 |
| 7°C to 13°C | 2 |
| 4°C to 7°C | 3 |

Tests to determine the coefficient of friction of the final textured surface will be made only if the Engineer determines by visual inspection that the final texturing may not have produced a surface having the specified coefficient of friction. Tests to determine the coefficient of friction will be made after the approach slab is opened to public traffic, but not later than 5 days after concrete placement. The coefficient of friction will be measured by California Test 342. Portions of completed concrete surfaces that are found to have a coefficient of friction less than 0.35 shall be ground or grooved parallel to the center line in conformance with the provisions for bridge decks in Section 42, "Groove and Grind Pavement," of the Standard Specifications.

**JOINTS**

Hardboard and expanded polystyrene shall conform to the provisions in Section 51-1.12D, "Sheet Packing, Preformed Pads and Board Fillers," of the Standard Specifications.

Type AL joint seals shall conform to the provisions in Section 51-1.12F, "Sealed Joints," of the Standard Specifications. The sealant may be mixed by hand-held power-driven agitators and placed by hand methods.

The pourable seal between the steel angle and concrete barrier shall conform to the requirements for Type A and AL seals in Section 51-1.12F(3), "Materials and Installation," of the Standard Specifications. The sealant may be mixed by hand-held power-driven agitators and placed by hand methods. Immediately prior to placing the seal, the joint shall be thoroughly cleaned, including abrasive blast cleaning of the concrete surfaces, so that all foreign material and concrete spillage are removed from all joint surfaces. Joint surfaces shall be dry at the time the seal is placed.

**MEASUREMENT AND PAYMENT**

Structural concrete, approach slab (Type R) will be measured and paid for in conformance with the provisions in Section 51-1.22, "Measurement," and Section 51-1.23, "Payment," of the Standard Specifications and these special provisions.

Full compensation for removing and disposing of portions of existing structures and pavement materials, and for furnishing and placing miscellaneous metal, Type AL joint seals, and pourable seals shall be considered as included in the contract price paid per cubic meter for structural concrete, approach slab (Type R) and no separate payment will be made therefor.

The quantity of aggregate base (approach slab) to be paid for shall include the actual volume of aggregate base (approach slab) used to fill voids below the reinforced structure approach slab concrete, except for the volume of areas low as a result of over excavation. The volume to be paid for will be calculated on the basis of the constructed length, width, and thickness of the filled voids. Structure approach slab concrete used to fill voids lower than the approved grade of the base, except for the areas low as a result of over excavation by the Contractor, will be measured and paid for by the cubic meter as aggregate base (approach slab).

The contract price paid per cubic meter for aggregate base (approach slab) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing aggregate base (approach slab), complete in place, including excavation and removing and disposing of base and subsealing materials, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Full compensation for furnishing, stockpiling, and disposing of standby material for construction of temporary structural sections; and for constructing, maintaining, removing, and disposing of temporary structural sections shall be considered as included in the contract price paid per cubic meter for structural concrete, approach slab (Type R) and no separate payment will be made therefor.

Full compensation for drilling and bonding of bar reinforcement or abutment tie rods shall be considered as included in the contract price paid per cubic meter for structural concrete, approach slab (Type R) and no separate payment will be made therefor.

**10-1.45 PAVING NOTCH EXTENSION**

This work shall consist of extending existing paving notches in conformance with the details shown on the plans and these special provisions.

Concrete for the paving notch extensions at Wineville Road UC (Br. No. 56-0601), Etiwanda Ave UC (Br. No. 56-0603) and Pyrite Street UC (Br. No. 56-0528) shall conform to the provisions for structure approach slab concrete of these special provisions.

At least 12 hours shall elapse between the time of placing concrete for the paving notch extension and placing concrete for the structure approach slab.

Concrete for paving notch extensions at San Sevaine Channel Bridge (Br No. 56-0645), Campbell Street UC (Br No. 56-0526) and Camino Real UC (Br .No. 56-0661)shall be a high-strength material consisting of either magnesium phosphate concrete, modified high alumina based concrete, or portland cement based concrete. Magnesium phosphate concrete shall conform to the provisions for magnesium phosphate concrete in Section 83-2.02D(1), "General," of the Standard Specifications and these special provisions. Modified high alumina based concrete and portland cement based concrete shall be water activated and shall conform to the provisions for single component (water activated) magnesium phosphate concrete in Section 83-2.02D(1), "General," of the Standard Specifications and these special provisions.

At least one hour shall elapse between the time of placing concrete for the paving notch extension and placing concrete for the structure approach slab.

A clean uniform rounded aggregate filler may be used to extend the concrete. The moisture content of the aggregate shall not exceed 0.5-percent. Grading of the aggregate shall conform to the following:

| Sieve Sizes | Percentage Passing |
|---|---|
| 12.5-mm | 100 |
| 1.18-mm | 0-5 |

The amount of aggregate filler shall conform to the manufacturer's recommendation, but in no case shall the concrete strengths be less than that specified for magnesium phosphate concrete in Section 83-2.02D(1), "General," of the Standard Specifications.

The components of dual component (with a prepackaged liquid activator) magnesium phosphate shall be combined by mixing complete units supplied by the manufacturer. Portions of units shall not be used. Water shall not be added to dual component magnesium phosphate.

Magnesium phosphate concrete shall not be mixed in containers or worked with tools containing zinc, cadmium, aluminum or copper. Modified high alumina based concrete shall not be mixed in containers or worked with tools containing aluminum.

Concrete shall not be retempered. Finishing tools that are cleaned with water shall be thoroughly dried before working the concrete.

When placing concrete on slopes exceeding 5 percent, the Engineer may require the Contractor to provide a flow controlled modified material.

Modified high alumina based concrete and portland cement based concrete shall be cured in conformance with the provisions in Section 90-7.01B, "Curing Compound Method," of the Standard Specifications. Magnesium phosphate concrete shall not be cured.

The surface temperature of the areas to receive the concrete shall be 5°C or above when the concrete is placed. The contact surface to receive the magnesium phosphate concrete shall be dry. The contact surfaces to receive the modified high alumina concrete or portland cement based concrete may be damp but not saturated.

The construction joint between the paving notch extension and the existing abutment shall conform to the provisions for horizontal construction joints in Section 51-1.13, "Bonding," of the Standard Specifications. Concrete shall be placed in the spalled portions of the existing paving notch concurrently with the concrete for the paving notch extension.

Attention is directed to "Reinforcement" of these special provisions.

Structure excavation and backfill shall conform to the provisions in Section 19-3, "Structure Excavation and Backfill," of the Standard Specifications, except for payment.

Drilling of holes and bonding of reinforcing steel dowels shall conform to the provisions for drilling and bonding dowels in Section 83-2.02D(1), "General," of the Standard Specifications. If reinforcement is encountered during drilling before the specified depth is attained, the Engineer shall be notified. Unless the Engineer approves coring through the reinforcement, the hole will be rejected and a new hole, in which reinforcement is not encountered, shall be drilled adjacent to the rejected hole to the depth shown on the plans.

The quantity of concrete for paving notch extension will be measured by the cubic meter as determined in conformance with the dimensions shown on the plans or other dimensions that may be ordered in writing by the Engineer.

The contract price paid per cubic meter for paving notch extension shall include full compensation for furnishing all labor, materials (including concrete for the paving notch spalled areas), tools, equipment, and incidentals, and for doing all the work involved in constructing the paving notch extension, complete in place, including structure excavation and backfill, reinforcement, and drilling and bonding dowels, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

## 10-1.46 SOUND WALL

### DESCRIPTION

This work shall consist of constructing sound walls of masonry block. Sound walls shall be supported on concrete barriers, retaining walls, footings, piles, pile caps, grade beams or posts as shown on the plans.

### SOUND WALL (MASONRY BLOCK)

Sound wall (masonry block), consisting of a reinforced hollow unit masonry block stem, shall be constructed in conformance with the provisions in Sections 19, "Earthwork," 52, "Reinforcement," and 90, "Portland Cement Concrete," of the Standard Specifications and these special provisions.

Sound wall masonry unit stems shall be constructed with joints of portland cement mortar. Wall stems shall be constructed with hand laid block. Wall stems shall not be constructed with preassembled panels.

Concrete for sound wall footings, pile caps, and grade beams, if required, shall be minor concrete.

Concrete masonry units shall be hollow, load bearing, conforming to the requirements in ASTM Designation: C 90, lightweight or medium weight classification, Type II. The mass of each unit shall not exceed 17.2 kg. Standard or open end units may be used. Open end units, if used, shall not reduce the spacing of the bar reinforcement as shown on the plans.

The masonry units shall conform to the color, nominal size and texture as shown on the plans

When high strength concrete masonry units with f'm=17.24 MPa are shown on the plans, the high strength masonry units shall have a minimum compressive strength of 25.86 MPa based on net area. When high strength concrete masonry units with f'm=13.79 MPa are shown on the plans, the high strength masonry units shall have a minimum compressive strength of 19.31 MPa based on net area. Each high strength concrete masonry unit shall be identified with a groove embedded in an interior corner. The groove shall extend from a mortar surface for a length of about 50 mm and shall have a depth of about 5 mm. When regular strength concrete masonry units with f'm=10.34 MPa are shown on the plans, the regular strength masonry units shall have a minimum compressive strength of 13.1 MPa based on net area.

Expansion joint filler shall conform to the requirements in ASTM Designation: D 1751 or ASTM Designation: D 2000 2AA-805.

Portland cement mortar shall be colored to match the units. Coloring shall be chemically inert, fade resistant mineral oxide or synthetic type.

Portland cement for wall stems shall conform to the provisions in Section 90-2.01, "Portland Cement," of the Standard Specifications.

Hydrated lime shall conform to the requirements in ASTM Designation: C 207, Type S.

Mortar sand shall be commercial quality.

Mortar for laying masonry units shall consist, by volume, of one part portland cement, zero to 0.5 part hydrated lime, and 2.25 to 3 parts mortar sand. Sufficient water shall be added to make a workable mortar. Each batch of mortar shall be accurately measured and thoroughly mixed. Mortar shall be freshly mixed as required. Mortar shall not be retempered more than one hour after mixing.

Prepackaged mortar materials and mortar containing admixtures may be used when approved in writing by the Engineer, provided the mortar shall not contain more than 0.05-percent soluble chlorides when tested in conformance with California Test 422 nor more than 0.25-percent soluble sulfates, as $SO_4$, when tested in conformance with California Test 417.

Before laying masonry units using prepackaged mortar materials or mortar containing admixtures, the Contractor shall submit to the Engineer the proposed sources of the materials together with test data from an independent testing laboratory for mortar tested in conformance with California Test 551. The test data shall be from specimens having a moist cure, except, the sample shall not be immersed in lime water. The average 28-day compressive strength of the mortar shall be not less than 17.2 MPa.

Aggregate for grout used to fill masonry units shall consist of fine aggregate and coarse aggregate conforming to the provisions in Section 90-2.02, "Aggregates," of the Standard Specifications. At least 20 percent of the aggregate shall be coarse aggregate. The Contractor shall determine the grading except that 100 percent of the combined grading shall pass the 12.5-mm sieve.

At the option of the Contractor, grout for filling masonry units may be proportioned either by volume or mass. Grout shall contain only enough water to cause the grout to flow and fill the voids without segregation. The maximum amount of free water shall not exceed 0.7 times the weight of the cement for regular strength masonry. The maximum amount of free water shall not exceed 0.6 times the mass of the cement for high strength masonry.

Grout proportioned by volume for regular strength masonry shall consist of at least one part portland cement and 4.5 parts aggregate. Grout proportioned by volume for high strength masonry shall consist of at least one part portland cement and 3.5 parts aggregate. Aggregate volumes shall be based on a loose, air-dry condition.

Grout proportioned by mass for regular strength masonry shall contain not less than 325 kilograms of portland cement per cubic meter. Grout proportioned by mass for high strength masonry shall contain not less than 400 kilograms of portland cement per cubic meter.

Reinforced concrete masonry unit wall stems shall be constructed with portland cement mortar joints in conformance with the following:

A. Concrete masonry unit construction shall be true and plumb in the lateral direction and shall conform to the grade shown on the plans in the longitudinal direction. Bond beam units or recesses for horizontal reinforcement shall be provided.
B. Mortar joints shall be approximately 10 mm wide. Walls and cross webs forming cells to be filled with grout shall be full bedded in mortar to prevent leakage of grout. All head and bed joints shall be solidly filled with mortar for a distance in from the face of the wall or unit not less than the thickness of the longitudinal face shells. Head joints shall be shoved tight.
C. Mortared joints around cells to be filled shall be placed so as to preserve the unobstructed vertical continuity of the grout filling. Any overhanging mortar or other obstruction or debris shall be removed from the inside of such cells.
D. Reinforcement shall be securely held in position at top and bottom with either wire ties or spacing devices and at intervals not exceeding 192 bar diameters before placing any grout. Wire shall be 16-gage (1.57 mm) or heavier. Wooden, aluminum, or plastic spacing devices shall not be used.
E. Splices in vertical reinforcement shall be made only at the locations shown on the plans.
F. Only those cells containing reinforcement shall be filled solidly with grout. All grout in the cells shall be consolidated at the time of placement by vibrating, and reconsolidated after excess moisture has been absorbed, but before plasticity is lost. Grout shall not be sliced with a trowel.
G. Walls shall be constructed in 1.2-m maximum height lifts. Grouting of each lift shall be completed before beginning masonry unit construction for the next lift. The top course of each lift shall consist of a bond beam.
H. A construction joint shall be constructed at the top of the top course to permit placement of the mortar cap. The mix design for the mortar cap shall be as approved by the Engineer.
I. Construction joints shall be made when the placing of grout, in grout filled cells, is stopped for more than one hour. The construction joint shall be approximately 12 mm below the top of the last course filled with grout.
J. Bond beams shall be continuous. The top of unfilled cells under horizontal bond beams shall be covered with metal or plastic lath.
K. When fresh masonry joins masonry that is partially or totally set, the contact surface shall be cleaned, roughened, and lightly wetted.
L. Surfaces of concrete on which the masonry walls are to be constructed shall be roughened and cleaned, exposing the aggregate, and shall be flushed with water and allowed to dry to a surface dry condition immediately before laying the masonry units.
M. Where cutting of masonry units is necessary, all cuts shall be made with a masonry saw to neat and true lines. Masonry units with cracking or chipping of the finished exposed surfaces will not be acceptable.
N. Masonry shall be protected in the same manner specified for concrete structures in Section 90-8, "Protecting Concrete," of the Standard Specifications and these special provisions.
O. During erection, all cells shall be kept dry in inclement weather by covering partially completed walls. The covering shall be waterproof fabric, plastic or paper sheeting, or other approved material. Wooden boards and planks shall not be used as covering materials. The covering shall extend down each side of masonry walls approximately 0.6-m.
P. Splashes, stains, or spots on the exposed faces of the wall shall be removed.

**ACCESS GATES**

Access gates shall conform to the details shown on the plans and these special provisions.

Timber members shall be tongue and groove Douglas fir sub-flooring free of knotholes. The location of knots of adjoining boards shall be staggered. The construction of the gate shall be with the tongue placed in the up position. The tongue of the top board and the groove of the bottom board shall be removed.

Timber members, steel frames, channels, anchorage devices, mounting hardware, gate rollers, corrugated steel pipe, nylon washers, and neoprene tubing shall be of commercial quality.

The 25-mm round ladder rungs with non-skid surface shall consist of No. 25 deformed, diamond pattern, bar reinforcing steel of commercial quality.

Gate rollers shall be rigid casters with self-lubricating bearings and hard rubber wheels.

All metal parts and hardware shall be hot-dip galvanized.

Timber surfaces of the access gates shall be primed and then stained with 2 coats of stain to match the adjacent sound wall. Primer and stain shall be of the top grade primer and stain from an established manufacturer. An established manufacturer is one who has manufactured industrial paints and stains to meet custom specifications for at least 10 years.

Where the back side of the masonry wall is to be split faced, or rough surface blocks, the bond beam above the gate opening upon which the upper gate guide is to be mounted shall have smooth sided blocks.

Material from excavation may be used for backfill outside of the pipe landings. Aggregate filling inside the pipe landings shall be a coarse concrete aggregate of commercial quality. Compacting of the aggregate will not be required.

**MEASUREMENT AND PAYMENT**

Sound walls of the types designated in the Engineer's Estimate will be measured by the square meter of the area of wall projected on a vertical plane between the elevation lines shown on the plans and length of wall (including the exposed posts, back up wall for access openings, and access gates).

The contract price paid per square meter for sound wall of the types designated in the Engineer's Estimate shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing the sound wall, complete in place, including all anchorages, access gates, ladders, corrugated steel pipe landings, and reinforcement, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer. Sound wall supports will be measured and paid for as separate items of work.

## 10-1.47 DRILL AND BOND DOWELS

Drilling and bonding dowels shall conform to the details shown on the plans, the provisions in Section 83-2.02D(1), "General," of the Standard Specifications, and these special provisions.

Dowels shall conform to the provisions for bar reinforcement in "Reinforcement" of these special provisions.

If reinforcement is encountered during drilling before the specified depth is attained, the Engineer shall be notified. Unless the Engineer approves coring through the reinforcement, the hole will be rejected and a new hole, in which reinforcement is not encountered, shall be drilled adjacent to the rejected hole to the depth shown on the plans.

Unless otherwise provided, dowels to be bonded into drilled holes will be paid for as bar reinforcing steel (bridge).

Unless otherwise provided, drilling and bonding dowels will be measured and paid for by the meter determined by the number and the required depth of holes as shown on the plans or as ordered by the Engineer.

The contract price paid per meter for drill and bond dowel shall include full compensation for furnishing all labor, materials (except reinforcing steel dowels), tools, equipment, and incidentals, and for doing all the work involved in drilling the holes, including coring through reinforcement when approved by the Engineer, and bonding the dowels, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

## 10-1.48 CLEAN EXPANSION JOINTS

All deck joints shown on the plans to be cleaned, shall be cleaned as specified herein.

Cleaning shall include removal of all existing seal material, dirt, debris, damaged waterstop, and joint filler, and shall be accomplished by methods which do not damage existing sound concrete surfaces.

Joint size shall be verified after the joint has been cleaned.

The Contractor shall take necessary precautions to ensure that material removed from expansion joints does not fall onto public traffic, railroad property, private property, or into the waterway beneath the bridges. The Contractor shall submit for the Engineer's approval, details for preventing material, equipment, or debris from falling onto traffic or railroad property.

Joints with undamaged waterstops shall be cleaned only to the top of the waterstop, provided the waterstop does not have to be removed for placement of the seal.

Joints without waterstops and joints with waterstops with existing damage or damage caused by the Contractor, shall be cleaned down to the hinge seat or bearing seat, unless otherwise directed by the Engineer.

All joint damage shall be repaired as directed by the Engineer.

Cleaning joints below existing damaged waterstops and repairing existing joint damage will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications. The cost of repairing damage caused by the Contractor's operations shall be borne by the Contractor.

Materials removed from the expansion joint, except for surface dust, shall be recovered and disposed of away from the site in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Cleaning expansion joints will be measured by the meter for the length of the deck joint as shown on the plans.

The contract price paid per meter for clean expansion joint shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in cleaning expansion joints, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

**10-1.49 SEALING JOINTS**

Joints in concrete bridge decks and joints between concrete structures and concrete approach slabs shall be sealed in conformance with the details shown on the plans, the provisions in Section 51, "Concrete Structures," of the Standard Specifications, and these special provisions.

Where polyurethane seals are shown on the plans, a silicone sealant conforming to the provisions in Section 51–1.12F, "Sealed Joints," of the Standard Specifications may be used.

When ordered by the Engineer, a joint seal larger than called for by the Movement Rating shown on the plans shall be furnished and installed. Payment to the Contractor for furnishing the larger seal and for saw cutting the increment of additional depth of groove required will be determined as provided in Section 4-1.03, "Changes," of the Standard Specifications.

Saw cutting of grooves will not be required at existing joints that are to be sealed with Type A joint seal unless ordered by the Engineer. The Contractor shall make saw cuts as ordered by the Engineer and the saw cutting will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications.

**10-1.50 REINFORCEMENT**

Reinforcement shall conform to the provisions in Section 52, "Reinforcement," of the Standard Specifications and these special provisions.

The Department's mechanical splices prequalified list can be found at the following internet site:

http://www.dot.ca.gov/hq/esc/approved_products_list/

The provisions of "Welding Quality Control" of these special provisions shall not apply to resistance butt welding.

When joining new reinforcing bars to existing reinforcement, sample splices shall be made using only the deformation pattern of the new reinforcement to be spliced.

Reinforcement shown on the plans to be galvanized shall be galvanized in conformance with the provisions in Section 75-1.05,"Galvanizing," of the Standard Specifications.

**MEASUREMENT AND PAYMENT**

Measurement and payment for reinforcement in structures shall conform to the provisions in Section 52-1.10, "Measurement," and Section 52-1.11, "Payment," of the Standard Specifications and these special provisions.

Full compensation for galvanizing steel reinforcement shall be considered as included in the prices paid for the various items of work involved and no additional compensation will be allowed therefor.

The quantities of bar reinforcing steel required for barrier slab at Sounwall SW #58 (Br. No. 56-SW58) will not be paid for as a separate item and full compensation therefor will be considered as included in the contract price paid per cubic meter for structural concrete, barrier slab.

**10-1.51 HEADED BAR REINFORCEMENT**

Headed bar reinforcement shall consist of bar reinforcement with heads attached to one or both ends. The type of headed bar reinforcement to be used on this project shall be on the Department's current prequalified list prior to use, and shall conform to the provisions of Section 52, "Reinforcement," of the Standard Specifications, the details shown on the plans, and these special provisions.

The Department maintains a list of prequalified headed bar reinforcement types. The prequalified list can be obtained by contacting the Transportation Laboratory and is available at the Department's internet site at:

http://www.dot.ca.gov/hq/esc/approved_products_list/

**GENERAL**

Prior to manufacturing, the Contractor shall submit to the Engineer the manufacturer's Quality Control (QC) manual for the fabrication of headed bar reinforcement. As a minimum, the QC manual shall include the following:

A) The pre-production procedures for the qualification of materials and equipment.
A) The methods and frequencies for performing QC procedures during production.
B) The calibration procedures and calibration frequency for all equipment.
C) A system for the identification and tracking of all friction welds. The system shall have provisions for permanently identifying each weld and the parameters used to perform it.
D) The welding procedure specification (WPS) for friction welded headed bar reinforcement.
E) A system for marking headed bar reinforcement.

The provisions of "Welding Quality Control" of these special provisions shall not apply to headed bar reinforcement.

The Contractor shall perform inspection and testing prior to, during, and after manufacturing headed bar reinforcement and as necessary to ensure that materials and workmanship conform to the requirements of the specifications.

A daily production log for the manufacture of headed bar reinforcement shall be maintained by the manufacturer for each production lot. The log shall clearly indicate the production lot numbers, the heats of bar material and head material used in the manufacture of each production lot, the number of bars in each production lot, and manufacturing records, including tracking and production parameters for welds or forgings. The data from the daily production log shall be available to the Engineer upon request.

A production lot of headed bar reinforcement is defined as 150 reinforcing bars, or fraction thereof, of the same bar size, with heads of the same size and type, and manufactured by the same method, produced from bar material of a single heat number and head material of a single heat number. If one reinforcing bar has a head on both ends, it will be counted as two reinforcing bars for the purposes of establishing and testing production lots. A new production lot shall be started if the heat number of either the bar material or the head material changes before the maximum production lot size of 150 is reached.

The Contractor shall furnish Certificates of Compliance accompanied by a copy of the mill test report, the Production Tests Reports specified herein, and the corresponding daily production logs to the Engineer in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications for each shipment of headed bar reinforcement delivered to the jobsite.

Welding, welder qualifications, and inspection of welding shall conform to the requirements for friction welding in ANSI/AWS C6.1.

Equipment used to perform friction welding shall be fitted with an effective in-process monitoring system to record essential production parameters that describe the process of welding the head onto the reinforcement. The parameters to be recorded shall include friction welding force, forge force, rotational speed, friction upset distance and time, and forge upset distance and time. The data from this in-process monitoring shall be recorded and preserved by the manufacturer until acceptance of the contract and shall be provided to the Engineer upon request.

**PRODUCTION TESTS**

Production tests shall be performed at the Contractor's expense, at an independent qualified testing laboratory, and in the presence of the Engineer, unless otherwise directed in writing. The independent qualified testing laboratory used to perform the testing of headed bar reinforcement samples shall not be employed or compensated by any subcontractor, or by other persons or entities hired by subcontractors who will provide other services or materials for the project, and shall have the following:

A. A tensile testing machine capable of breaking the largest size of reinforcing bar to be tested.
B. Operators who have received formal training for performing the testing requirements of ASTM Designation: A 970/A 970M.
C. A record of annual calibration of testing equipment performed by an independent third party that has 1) standards that are traceable to the National Institute of Standards and Technology, and 2) a formal reporting procedure, including published test forms.

The Engineer shall be notified in writing when any lots of headed bar reinforcement are ready for testing. The notification shall include the number of lots to be tested and the location where the tests are to be conducted. After notification has been received, test samples will be randomly selected by the Engineer from each production lot of headed bar reinforcement which is ready for shipment to the jobsite. If epoxy coating is required, test samples will be taken after the headed bar reinforcement has been prepared for epoxy coating. The Engineer will be at the testing site within a maximum of one week after receiving written notification that the samples are at the testing site and ready for testing. In the event the Engineer fails to be present at the testing site within the time allowed, and if, in the opinion of the Engineer, completion of

the work is delayed or interfered with by failure of the Engineer to be present at the testing site, the Contractor will be compensated for any resulting loss in the same manner as provided for in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

A minimum of 3 samples from each production lot shall be tested. One tensile test shall be conducted on each sample.

Tensile tests shall conform to the requirements specified in ASTM Designation: A 970/A 970M, Section 7, except that at rupture, there shall be visible signs of necking in the reinforcing bar 1) at a minimum distance of one bar diameter away from the head to bar connection for friction welded headed bar reinforcement, or 2) outside the affected zone for integrally forged headed bar reinforcement.

The affected zone for integrally forged headed bar reinforcement is the portion of the reinforcing bar where any properties of the bar, including the physical, metallurgical, or material characteristics, have been altered during the manufacturing process.

If one of the test specimens fails to meet the specified requirements, one retest shall be performed on one additional sample, selected by the Engineer, from the same production lot. If the additional test specimen, or if more than one of the original test specimens fail to meet these requirements, all headed bar reinforcement in the lot represented by the tests will be rejected in conformance with the provisions in Section 6-1.04, "Defective Materials," of the Standard Specifications.

A Production Test Report for all testing performed on each lot shall be prepared by the independent testing laboratory and submitted to the Engineer as specified herein. The report shall be signed by an engineer who represents the laboratory and is registered as a Civil Engineer in the State of California. The report shall include the following information for each set: contract number, bridge number, lot number, bar size, type of headed bar reinforcement, physical conditions of test sample, any notable defects, limits of affected zone, location of visible necking area, and the ultimate strength of each headed bar.

Each unit of headed bar reinforcement in a production lot to be shipped to the site shall be tagged in a manner such that production lots can be accurately identified at the jobsite. All unidentified headed bar reinforcement received at the jobsite will be rejected.

**MEASUREMENT AND PAYMENT**

Quantities of headed bar reinforcement will be measured as units determined from the number of heads shown on the plans or as directed by the Engineer.

The contract unit price paid for headed bar reinforcement shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing headed bar reinforcement, including conforming to all testing requirements, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Bar reinforcement to be used in the manufacture of headed bar reinforcement, and placing the completed headed bar reinforcement into the work will be measured and paid for as specified in Section 52, "Reinforcement," of the Standard Specifications, except that the lengths to be used in the computation of calculated masses of the bar reinforcement shall be the entire length of the completed headed bar, including heads.

**COVERING GRAFFITH WITH PAINT**

If graffiti appears on sound walls, the Contractor shall, as directed by the engineer, cover the graffiti with paint that closely matches the color of sound wall. The graffiti shall be covered with paint 10 working days of its appearance on the sound wall. Covering graffiti with paint will be paid for as extra work as provided in Section 4-1.03D, "Extra Work" of the Standard Specifications.

## 10-1.52 SIGN STRUCTURES

Sign structures and foundations for overhead signs shall conform to the provisions in Section 56-1, "Overhead Sign Structures," of the Standard Specifications, "Steel Structures" of these special provisions, and the following requirements.

Before commencing fabrication of sign structures, the Contractor shall submit 2 sets of working drawings to the Engineer in conformance with the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications. The working drawings shall include sign panel dimensions, span lengths, post heights, anchorage layouts, proposed splice locations, a snugging and tensioning pattern for anchor bolts and high strength bolted connections, and details for permanent steel anchor bolt templates. The working drawings shall be supplemented with a written quality control program that includes methods, equipment, and personnel necessary to satisfy the requirements specified herein.

Vertical clearances for new overhead signs shall be provided to the Engineer prior to fabrication and at the end of construction 15 days before it is open to freeway traffic.

Working drawings shall be 559 mm x 864 mm or 279 mm x 432 mm in size and each drawing and calculation sheet shall include the State assigned designations for the sign structure type and reference as shown on the contract plans, District-County-Route-Kilometer Post, and contract number.

The Engineer shall have 20 working days to review the sign structure working drawings after a complete submittal has been received. No fabrication or installation of sign structures shall be performed until the working drawings are approved in writing by the Engineer.

Should the Engineer fail to complete the review within the time allowance and if, in the opinion of the Engineer, the Contractor's controlling operation is delayed or interfered with by reason of the delay in reviewing the sign structure working drawings, the delay will be considered a right of way delay in conformance with the provisions in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

The time to be provided for the Engineer's review and approval of the working drawings for specific structures, or portions thereof, shall be as follows:

| Sign Structure Name/No. | Location | Review Time - (Working Days) |
|---|---|---|
| | | |
| | | |
| | | |
| | | |
| | | |

Steel bolts not designated on the plans as high-strength (HS) or stainless steel shall be for general applications and shall conform to the requirements in ASTM Designation: A 307.

A permanent steel template shall be used to maintain the proper anchor bolt spacing.

One top nut, one leveling nut, and 2 washers shall be provided for the upper threaded portion of each anchor bolt.

Flatness of surfaces of 1) base plates that are to come in contact with concrete, grout, or washers and leveling nuts, and 2) plates in high-strength bolted connections, shall conform to the requirements in ASTM Designation: A 6/A 6M.

No holes shall be made in members unless the holes are shown on the plans or are approved in writing by the Engineer.

Longitudinal seam welds shall have 60 percent minimum penetration, except that within 150 mm of circumferential welds, longitudinal seam welds shall be complete joint penetration (CJP) groove welds. In addition, longitudinal seam welds on structures having telescopic pole segment splices shall be CJP groove welds on the female end for a length on each end equal to the designated slip fit splice length plus 150 mm.

Steel members used for overhead sign structures shall receive nondestructive testing (NDT) in conformance with AWS D1.1 and the following:

A.

| Weld Location | Weld Type | Minimum Required NDT |
|---|---|---|
| Splice welds around the perimeter of tubular sections, poles, and arms. | CJP groove weld with backing ring | 100% UT[a] or RT[b] |
| Longitudinal seam welds | CJP or PJP[c] groove weld | Random 25% MT[d] |
| Longitudinal seam welds within 150 mm of a circumferential splice. | CJP groove weld | 100% UT or RT |
| Welds attaching base plates, flange plates, or pole or mast arm plates, to poles or arm tubes. | CJP groove weld with backing ring and reinforcing fillet | t> 4.5 mm: 100%UT and MT<br>t< 4.5 mm: 100% MT after root weld pass & final weld pass<br>t = pole or arm thickness |
| | External (top) fillet weld for socket-type connections | 100% MT |

[a] ultrasonic testing
[b] radiographic testing
[c] partial joint penetration
[d] magnetic particle testing

B. The acceptance and repair criteria for UT of welded joints where any of the members are less than 8 mm thick or where tubular sections are less than 325 mm in diameter, shall conform to the requirements in AWS D1.1, Section 6.13.3.1. A written procedure approved by the Engineer shall be used when performing this UT. These written procedures shall conform to the requirements in AWS D1.1, Annex K. The acceptance and repair criteria for other welded joints receiving UT shall conform to the requirements in AWS D1.1, Section 6, Table 6.3 for cyclically loaded nontubular connections.

C. The acceptance and repair criteria for radiographic or real time image testing shall conform to the requirements of AWS D1.1 for tensile stress welds.

D. For longitudinal seam welds, the random locations for NDT will be selected by the Engineer. The cover pass shall be ground smooth at the locations to be tested. If repairs are required in a portion of a tested weld, the repaired portion shall receive NDT, and additional NDT shall be performed on untested portions of the weld. The additional

E. NDT shall be performed on 25 percent of that longitudinal seam weld. After this additional NDT is performed, and if more repairs are required, then that entire longitudinal seam weld shall receive NDT.

Circumferential welds and base plate to post welds may be repaired only one time without written permission from the Engineer.

All ferrous metal parts of tubular sign structures shall be galvanized and shall not be painted.

Full compensation for furnishing anchor bolt templates and for testing of welds shall be considered as included in the contract price paid per kilogram for furnish sign structure and no additional compensation will be allowed therefor.

### 10-1.53 ROADSIDE SIGNS

Roadside signs shall be furnished and installed at the locations shown on the plans or where designated by the Engineer and in conformance with the provisions in Section 56-2, "Roadside Signs," of the Standard Specifications and these special provisions.

Wood posts shall be pressure treated after fabrication in conformance with the provisions in Section 58, "Preservative Treatment of Lumber, Timber and Piling," of the Standard Specifications and AWPA Use Category System: UC4A, Commodity Specification A or B.Type N, Type P, and Type R marker panels mounted on a post with a roadside sign shall be considered to be sign panels and will not be paid for as markers.

Roadside sign panels shall be state furnished. The sheeting will be Type IV (High Intensity) reflective.

### 10-1.54 INSTALL SIGN PANEL ON EXISTING FRAME

Sign panels shall be installed on existing frames at the locations shown on the plans or where designated by the Engineer and in conformance with the provisions in Section 56-1.06, "Sign Panels and Fastening Hardware," of the Standard Specifications and these special provisions.

Existing sign panels, as shown on the plans, shall be removed and become the property of the Contractor.

Installing sign panels on existing frames will be measured by the square meter and the quantity to be paid for will be the total area, in square meters, of sign panels installed in place.

The contract price paid per square meter for install sign panel on existing frame shall include full compensation for furnishing all labor, materials (except State-furnished sign panels and mounting bolts), tools, equipment, and incidentals, and for doing all the work involved in installing sign panels on existing frames, complete in place (including removing, salvaging, and disposing of existing sign panels), as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

**10-1.55 INSTALL SIGN OVERLAY**

Sign overlays shall be installed on existing signs as shown on the plans and in conformance with these special provisions.

Sign overlay panels will be furnished by the State as provided under "Materials" of these special provisions.

Self-plugging blind rivets for installing sign overlays shall have a 4.8-mm x 15.9-mm shank. A No. 10 drill shall be used for drilling the rivet holes. If the overlay is not pre-punched, maximum rivet spacing shall be 400 mm.

Where the existing sign panel is porcelain enameled steel, a diamond bit shall be used for drilling rivet holes. Exposed metal around the hole shall be covered with a thin coat of silicone adhesive conforming to the provisions in "Adhesive for Bonding Reflex Reflectors to Porcelain Enamel Traffic Signs" of these special provisions.

Installing sign overlays will be measured by the square meter.

The contract price paid per square meter for install sign overlay shall include full compensation for furnishing all labor, materials (except sign overlays), tools, equipment, and incidentals, and for doing all the work involved in installing sign overlay panels on existing signs (including fastening hardware), as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

**10-1.56 FURNISH SIGN**

Signs shall be fabricated and furnished in accordance with details shown on the plans, the Traffic Sign Specifications, and these special provisions.

Traffic Sign Specifications for California sign codes are available for review at the Department's internet site:

http://www.dot.ca.gov/hq/traffops/signtech/signdel/specs.htm

Traffic Sign Specifications for signs referenced with Federal MUTCD sign codes can be found in Standard Highway Signs Book, administered by the Federal Highway Administration, which is available for review at the following Internet website:

http://mutcd.fhwa.dot.gov/ser-pubs.htm

Information on cross-referencing California sign codes with the Federal MUTCD sign codes is available at the Department's internet site:

http://www.dot.ca.gov/hq/traffops/signtech/signdel/specs.htm

Temporary or permanent signs shall be free from blemishes that may affect the serviceability and detract from the general sign color and appearance when viewing during daytime and nighttime from a distance of 8 m. The face of each finished sign shall be uniform, flat, smooth, and free of defects, scratches, wrinkles, gel, hard spots, streaks, extrusion marks, and air bubbles. The front, back, and edges of the sign panels shall be free of router chatter marks, burns, sharp edges, loose rivets, delaminated skins, excessive adhesive over spray and aluminum marks.

**QUALITY CONTROL FOR SIGNS**

The requirements of “Quality Control for Signs” in this section shall not apply to construction area signs.

No later than 14 days before sign fabrication, the Contractor shall submit a written copy of the quality control plan for signs to the Transportation Laboratory, Materials Engineering and Testing Services (METS), Telephone (916) 227-7291. METS will have 10 days to review the quality control plan. Sign fabrication shall not begin until METS approves the Contractor's quality control plan in writing. The Contractor shall submit to the Engineer at least 3 copies of the approved quality control plan. The quality control plan shall include, but not be limited to the following requirements:

1. Identification of the party responsible for quality control of signs,
2. Basis of acceptance for incoming raw materials at the fabrication facility,
3. Type, method and frequency of quality control testing at the fabrication facility,
4. List (by manufacturer and product name) of process colors, protective overlay film, retroreflective sheeting and black non-reflective film,

5. Recommended cleaning procedure for each product,
6. Method of packaging, transport and storage for signs.

No legend shall be installed at the project site. Legend shall include letters, numerals, tildes, bars, arrows, route shields, symbols, logos, borders, artwork, and miscellaneous characters. The style, font, size, and spacing of the legend shall conform to the Standard Alphabets published in the FHWA Standard Highway Signs Book. The legend shall be oriented in the same direction in accordance with the manufacturer's orientation marks found on the retroreflective sheeting.

On multiple panel signs, legend shall be placed across joints without affecting the size, shape, spacing, and appearance of the legend. Background and legend shall be wrapped around interior edges of formed panel signs as shown on plans to prevent delamination.

The following notation shall be placed on the lower right side of the back of each sign where the notation will not be blocked by the sign post or frame:

1. PROPERTY OF STATE OF CALIFORNIA.
2. Name of the sign manufacturer.
3. Month and year of fabrication.
4. Type of retroreflective sheeting
5. Manufacturer's identification and lot number of retroreflective sheeting.

The above notation shall be applied directly to the aluminum sign panels in 6-mm upper case letters and numerals by die-stamp and applied by similar method to the fiberglass reinforced plastic signs. Painting, screening, or engraving the notation will not be allowed. The notation shall be applied without damaging the finish of the sign.

Signs with a protective overlay film shall be marked with a dot of 10 mm diameter. The dot placed on white border shall be black while the dot placed on black border shall be white. The dot shall be placed on the lower border of the sign before application of the protective overlay film and shall not be placed over the legend and bolt holes. The application method and exact location of the dot shall be determined by the manufacturer of the signs.

For sign panels that have a minor dimension of 1220 mm or less, no splice will be allowed in the retroreflective sheet except for the splice produced during the manufacturing of the retroreflective sheeting. For sign panels that have a minor dimension greater than 1220 mm, only one horizontal splice will be allowed in the retroreflective sheeting.

Unless specified by the manufacturer of the retroreflective sheeting, splices in retroreflective sheeting shall overlap by a minimum of 25 mm. Splices shall not be placed within 50 mm from edges of the panels. Except at the horizontal borders, the splices shall overlap in the direction from top to bottom of the sign to prevent moisture penetration. The retroreflective sheeting at the overlap shall not exhibit a color difference under the incident and reflected light.

Signs exhibiting a significant color difference between daytime and nighttime shall be replaced immediately at the Contractor's expenses.

Repairing sign panels will not be allowed except when approved by the Engineer.

The Department will inspect signs at the Contractor's facility and delivery location, and in accordance with Section 6, "Control of Materials," of the Standard Specifications. The Engineer will inspect signs for damage and defects before and after installation.

Regardless of kind, size, type, or whether delivered by the Contractor or by a common carrier, signs shall be protected by thorough wrapping, tarping, or other methods to ensure that signs are not damaged by weather conditions and during transit. Signs shall be dry during transit and shipped on palettes, in crates, or tier racks. Padding and protective materials shall be placed between signs as appropriate. Finished sign panels shall be transported and stored by method that protects the face of signs from damage. The Contractor shall replace wet, damaged, and defective signs at the Contractor's expense.

Signs shall be stored in dry environment at all times. Signs shall not rest directly on the ground or become wet during storage. Signs, whether stored indoor or outdoor, shall be in free standing. When stored outdoor, signs shall be placed at a minimum spacing of 100 mm apart. In areas of high heat and humidity signs shall be stored in enclosed climate-controlled trailers or containers. Signs shall be stored indoor if duration of the storage will exceed 30 days.

Screen processed signs shall be protected, transported and stored as recommended by the manufacturer of the retroreflective sheeting.

When requested, the Contractor shall provide the Engineer test samples of signs and materials used at various stages of production. Sign samples shall be 300 mm x 300 mm in size with applied background, letter or numeral, and border strip.

The Contractor shall assume the costs and responsibilities resulting from the use of patented materials, equipment, devices, and processes for the Contractor's work.

**SINGLE SHEET ALUMINUM SIGN**

Single Sheet aluminum signs shall be fabricated and furnished with or without frame. The Contractor shall furnish the sheet aluminum in accordance to "Sheet Aluminum" of these special provisions. Single sheet aluminum signs shall be fabricated from sheet aluminum alloy 6061-T6 or 5052-H38.

Single Sheet aluminum signs shall not have a vertical splice in the sheet aluminum. For signs with depth greater than 1220 mm, one horizontal splice will be allowed in the sheet aluminum.

Framing for single sheet aluminum sign shall consist of aluminum channel or rectangular aluminum tubing. The framing shall have a length tolerance of +3 mm. The face sheet shall be affixed to the frame with rivets of 5-mm diameter. Rivets shall be placed within the web of channels and shall not be placed less than 13 mm from edges of the sign panels. Rivets shall be made of aluminum alloy 5052 and shall be anodized or treated with conversion coating to prevent corrosion. The exposed portion of rivets on the face of signs shall be the same color as the background or legend where the rivets are placed.

Finished signs shall be flat within a tolerance of +3 mm per meter when measured across the plane of the sign in all directions. The finished signs shall have an overall tolerance within +3 mm of the detailed dimensions.

Aluminum channels or rectangular aluminum tubings shall be welded together with the inert gas shielded-arc welding process using E4043 aluminum electrode filler wires as shown on the plans. Width of the filler shall be equal to wall thickness of smallest welded channel or tubing.

**10-1.57 CLEAN AND PAINT STRUCTURAL STEEL**

Metal surfaces of PTFE bearings exposed to the atmosphere and in contact with the structure in the completed work, except stainless steel surfaces, shall be cleaned and painted in conformance with the provisions in Sections 59-2, "Painting Structural Steel," and 91, "Paint" of the Standard Specifications, and "Clean and Paint Structural Steel" of these special provisions.

**CLEANING**

Metal surfaces of PTFE bearings exposed to the atmosphere and in contact with the structure in the completed work, except stainless steel surfaces shall be dry blast cleaned in conformance with the requirements in Surface Preparation Specification No. 10, "Near White Blast Cleaning," of the "SSPC: The Society for Protective Coatings." Blast cleaning shall leave surfaces with a dense, uniform, angular anchor pattern of not less than 40 µm nor more than 86 µm as measured in conformance with the requirements in ASTM Designation: D 4417.

Mineral and slag abrasives used for blast cleaning steel shall conform to the requirements in Abrasive Specification No. 1, "Mineral and Slag Abrasives," of the "SSPC: The Society for Protective Coatings" and shall not contain hazardous material. Mineral and slag abrasives shall comply with the requirements for Class A, Grade 2 to 3 as defined therein.

A Certificate of Compliance conforming to the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications and a Material Safety Data Sheet shall be furnished prior to use for each shipment of blast cleaning material for steel.

**PAINTING**

Blast cleaned surfaces shall receive a single undercoat, consisting of a waterborne inorganic zinc coating conforming to the requirements in AASHTO Designation M 300, Type II, except that: 1) the first 3 sentences of Section 4.7, "Primer Field Performance Requirements," and the entire Section 4.7.1 shall not apply, and 2) zinc dust shall be Type II in conformance with the requirements in ASTM Designation: D 520. The inorganic zinc coating shall be listed on the qualified products list which may be obtained from the Transportation Laboratory.

The color of the final application of inorganic zinc coating shall match Federal Standard 595B No. 36373.

Inorganic zinc coating shall be used within 12 hours of initial mixing.

Application of inorganic zinc coating shall conform to the provisions for applying zinc-rich coating in Section 59-2.13, "Application of Zinc-Rich Primer," of the Standard Specifications.

Inorganic zinc coating shall not be applied when the atmospheric or surface temperature is less than 7°C or more than 29°C, nor when the relative humidity exceeds 85 percent.

The single undercoat of inorganic zinc coating shall be applied to the required dry film thickness in 2 or more applications within 4 hours after blast cleaning.

The total dry film thickness of all applications of the inorganic zinc undercoat shall be not less than 100 µm nor more than 200 µm.

Areas where mudcracking occurs in the inorganic zinc coating shall be blast cleaned and repainted with inorganic zinc coating to the specified thickness.

Dry spray, or overspray, as defined in the Steel Structures Painting Manual, Volume 1, "Good Painting Practice," of the "SSPC: The Society for Protective Coatings," shall be removed prior to application of subsequent coats or final acceptance. Removal of dry spray shall be by screening or other methods that minimize polishing of the inorganic zinc surface. The dry film thickness of the coating after removal of dry spray shall be in conformance with the provisions for applying the single undercoat, as specified herein.

Final and finish coats will not be required.

**10-1.58 ALTERNATIVE PIPE**

Alternative pipe culverts shall conform to the provisions in Section 62, "Alternative Culverts," of the Standard Specifications and these special provisions.

**10-1.59 REINFORCED CONCRETE PIPE**

Reinforced concrete pipe shall conform to the provisions in Section 65, "Reinforced Concrete Pipe," of the Standard Specifications and these special provisions.

Where embankment will not be placed over the top of the pipe, a relative compaction of not less than 85 percent shall be required below the pipe spring line for pipe installed using Method 1 backfill in trench, as shown on Standard Plan A62D. Where the pipe is to be placed under the traveled way, a relative compaction of not less than 90 percent shall be required unless the minimum distance between the top of the pipe and the pavement surface is the greater of 1.2 m or one half of the outside diameter of the pipe.

Except as otherwise designated by classification on the plans or in the specifications, joints for culvert and drainage pipes shall conform to the plans or specifications for standard joints.

When reinforced concrete pipe is installed in conformance with the details shown on Revised Standard Plan A62DA, the fifth paragraph of Section 19-3.04, "Water Control and Foundation Treatment," of the Standard Specifications shall not apply.

When solid rock or other unyielding material is encountered at the planned elevation of the bottom of the bedding, the material below the bottom of the bedding shall be removed to a depth of 1/50 of the height of the embankment over the top of the culvert, but not less than 150 mm nor more than 300 mm. The resulting trench below the bottom of the bedding shall be backfilled with structure backfill material in conformance with the provisions in Section 19-3.06, "Structure Backfill," of the Standard Specifications.

The Outer Bedding shown on Revised Standard Plan A62DA shall not be compacted prior to placement of the pipe.

**10-1.60 OVERSIDE DRAIN**

300 mm entrance tapers, slip joints, metal pipe downdrain anchor assemblies, and 300 mm pipe downdrains shall conform to the provisions in Section 69, "Overside Drains," of the Standard Specifications and these special provisions.

Steel entrance tapers and pipe downdrains shall be fabricated from zinc-coated steel sheet.

**10-1.61 MISCELLANEOUS FACILITIES**

Pipe riser and flared end sections shall conform to the provisions in Section 70, "Miscellaneous Facilities," of the Standard Specifications.

**10-1.62 SLOPE PROTECTION**

Slope protection shall be placed or constructed in conformance with the provisions in Section 72, "Slope Protection," of the Standard Specifications and these special provisions.

Rock slope protection fabric shall be woven or nonwoven type fabric, Type A.

**10-1.63 SLOPE PAVING**

Slopes under the ends of bridges, where shown on the plans, shall be paved in conformance with the provisions in Section 72-6, "Slope Paving," of the Standard Specifications

**10-1.64 MISCELLANEOUS IRON AND STEEL**

Miscellaneous iron and steel shall conform to the provisions in Section 75, "Miscellaneous Metal," of the Standard Specifications.

**10-1.65 CHAIN LINK FENCE**

Chain link fence shall be Type CL-1.8 and shall conform to the provisions in Section 80, "Fences," of the Standard Specifications.

## 10-1.66 TRANSITION RAILING (TYPE WB)

Transition railing (Type WB) shall be constructed in conformance with the provisions in Section 83-1, "Railings," of the Standard Specifications and these special provisions.

Attention is directed to "Order of Work" of these special provisions.

Transition railing (Type WB) shall be constructed as shown on the plans. The contract unit price paid for transition railing (Type WB) shall include full compensation for furnishing all labor, materials, tools, equipment and incidentals and for doing all work involved in furnishing and installing transition railing (Type WB), complete in place, including excavtion, backfill and disposal of surplus material and connecting the transition railing (Type WB) to the bridge railing and terminal system end treatment, as shown on the plans, as specifed in the Standard Specifications and these special provisions and as directed by the Engineer.

## 10-1.67 METAL BEAM GUARD RAILING

Metal beam guard railing shall be constructed in conformance with the provisions in Section 83-1, "Railings," of the Standard Specifications and these special provisions.

Attention is directed to "Order of Work" of these special provisions.

Line posts and blocks shall be wood.

### ALTERNATIVE FLARED TERMINAL SYSTEM

Alternative flared terminal system shall be furnished and installed as shown on the plans and in conformance with these special provisions.

The allowable alternatives for a flared terminal system shall consist of one of the following or a Department approved equal.

(1) TERMINAL SYSTEM (TYPE FLEAT) - Terminal system (Type FLEAT) shall be a Flared Energy Absorbing Terminal 350 manufactured by Road Systems, Inc., located in Big Spring, Texas, and shall include items detailed for terminal system (Type FLEAT) shown on the plans. The Flared Energy Absorbing Terminal 350 can be obtained from the distributor, Universal Industrial Sales, P.O. Box 699, Pleasant Grove, UT 84062, Telephone (801) 785–0505 or from the distributor, Gregory Highway Products, 4100 13th Street, S.W., Canton, OH 44708, Telephone (330) 477–4800.

(2) TERMINAL SYSTEM (TYPE SRT) - Terminal system (Type SRT) shall be an SRT-350 Slotted Rail Terminal (8-post system) as manufactured by Trinity Industries, Inc., and shall include items detailed for terminal system (Type SRT) shown on the plans. The SRT-350 Slotted Rail Terminal (8-post system) can be obtained from the manufacturer, Trinity Industries, Inc., P.O. Box 99, 950 West 400S, Centerville, UT 84014, Telephone (800) 772–7976.

The Contractor shall provide the Engineer with a Certificate of Compliance from the manufacturer in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications. The Certificate of Compliance shall certify that the terminal systems furnished conform to the contract plans and specifications, conform to the prequalified design and material requirements, and were manufactured in conformance with the approved quality control program.

Terminal systems shall be installed in conformance with the manufacturer's installation instructions and these requirements. Each terminal system installed shall be identified by painting the type of terminal system in neat black letters and figures 60 mm high on the backside of the rail element between system posts numbers 4 and 5.

For terminal system (Type SRT), the steel foundation tubes with soil plates attached shall be, at the Contractor's option, either driven, with or without pilot holes, or placed in drilled holes. Space around the steel foundation tubes shall be backfilled with selected earth, free of rock, placed in layers approximately 100 mm thick and each layer shall be moistened and thoroughly compacted. The wood terminal posts shall be inserted into the steel foundation tubes by hand and shall not be driven. Before the wood terminal posts are inserted, the inside surfaces of the steel foundation tubes to receive the wood posts shall be coated with a grease which will not melt or run at a temperature of 65°C or less. The edges of the wood terminal posts may be slightly rounded to facilitate insertion of the post into the steel foundation tubes.

For terminal system (Type FLEAT), the soil tubes shall be, at the Contractor's option, driven with or without pilot holes, or placed in drilled holes. Space around the steel foundation tubes shall be backfilled with selected earth, free of rock, placed in layers approximately 100 mm thick and each layer shall be moistened and thoroughly compacted. Wood posts shall be inserted into the steel foundation tubes by hand. Before the wood terminal posts are inserted, the inside surfaces of the steel foundation tubes to receive the wood posts shall be coated with a grease which will not melt or run at a temperature of 65°C or less. The edges of the wood posts may be slightly rounded to facilitate insertion of the post into the steel foundation tubes.

Surplus excavated material remaining after the terminal system has been installed shall be disposed of in a uniform manner along the adjacent roadway where designated by the Engineer.

The contract unit price paid for alternative flared terminal system shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing and installing alternative flared terminal system, complete in place, including excavation, backfill and disposal of surplus material, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

### 10-1.68 CHAIN LINK RAILING

Chain link railing shall conform to the provisions in Section 83-l, "Railings," of the Standard Specifications.

### 10-1.69 CONCRETE BARRIER

Concrete barriers shall conform to the provisions in Section 83-2, "Barriers," of the Standard Specifications and these special provisions.

If reinforcement is encountered during drilling before the specified depth is attained, the Engineer shall be notified. Unless the Engineer approves coring through the reinforcement, the hole will be rejected and a new hole, in which reinforcement is not encountered, shall be drilled adjacent to the rejected hole to the depth shown on the plans.

Concrete barrier (Type 736A) will be measured and paid for as concrete barrier (Type 736R MODIFIED).

Full compensation for constructing reinforced concrete block adjacent to wingwall for concrete barrier type 732R shall be considered as included in the contract price paid per meter for concrete barrier (Type 732R) and no additional compensation will be allowed therefor.

### 10-1.70 THERMOPLASTIC TRAFFIC STRIPE AND PAVEMENT MARKING

Thermoplastic traffic stripes (traffic lines) and pavement markings shall be applied in conformance with the provisions in Section 84, "Traffic Stripes and Pavement Markings," of the Standard Specifications and these special provisions.

Thermoplastic material shall be free of lead and chromium, and shall conform to the requirements in State Specification PTH-02ALKYD.

Retroreflectivity of the thermoplastic traffic stripes and pavement markings shall conform to the requirements in ASTM Designation: D 6359-99. White thermoplastic traffic stripes and pavement markings shall have a minimum initial retroreflectivity of 250 $mcd \cdot m^{-2} \cdot lx^{-1}$. Yellow thermoplastic traffic stripes and pavement markings shall have a minimum initial retroreflectivity of 150 $mcd \cdot m^{-2} \cdot lx^{-1}$.

Where striping joins existing striping, as shown on the plans, the Contractor shall begin and end the transition from the existing striping pattern into or from the new striping pattern a sufficient distance to ensure continuity of the striping pattern.

Thermoplastic traffic stripes shall be applied at the minimum thickness and application rate as specified below. The minimum application rate is based on a solid stripe of 100 mm in width.

| Minimum StripeThickness (mm) | Minimum Application Rate (kg/m) |
|---|---|
| 2.5 | 0.5 |

Thermoplastic traffic stripes and pavement markings shall be free of runs, bubbles, craters, drag marks, stretch marks, and debris.

### 10-1.71 PAINT TRAFFIC STRIPE AND PAVEMENT MARKING

Painted traffic stripes (traffic lines) and pavement markings shall be applied in conformance with the provisions in Section 84, "Traffic Stripes and Pavement Markings," of the Standard Specifications and these special provisions.

Traffic stripe and pavement marking paint shall conform to the requirements in State Specification No. PTWB-01.

The color of the painted traffic stripes and pavement markings shall conform to the requirements in ASTM Designation: D 6628-01.

Retroreflectivity of the paint traffic stripes and pavement markings shall conform to the requirements in ASTM Designation: D 6359-99. White painted traffic stripes and pavement markings shall have a minimum initial retroreflectivity of 250 $mcd \cdot m^{-2} \cdot lx^{-1}$. Yellow painted traffic stripes and pavement markings shall have a minimum initial retroreflectivity of 150 $mcd \cdot m^{-2} \cdot lx^{-1}$.

If permanent tape is placed instead of painted -the tape-as paint traffic stripe-paint pavement marking of-.

## 10-1.72 PAVEMENT MARKERS

Pavement markers shall be placed in conformance with the provisions in Section 85, "Pavement Markers," of the Standard Specifications and these special provisions.

Attention is directed to "Traffic Control System For Lane Closure" of these special provisions regarding the use of moving lane closures during placement of pavement markers with bituminous adhesive.

The Contractor shall furnish the Engineer certificates of compliance for the pavement markers in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications.

Retroreflective pavement markers shall be marked as abrasion resistant on the body of the markers.

Retroreflective pavement markers shall comply with the specifid intensity provisions for reflectance after abrading the lens surface in conformance with the “Steel Wool Abrasion Procedure” specified for pavement markers placed in pavement recesses in Section 85-1.05, “Retroflective Pavement Markers,” of the Standard Specifications.

# SECTION 10-2 HIGHWAY PLANTING AND IRRIGATION SYSTEMS

## 10-2.01 GENERAL

The work performed in connection with highway planting and irrigation systems shall conform to the provisions in Section 20, "Erosion Control and Highway Planting," of the Standard Specifications and these special provisions.

The Contractor shall notify the Engineer not less than 72 hours prior to requiring initial access to the existing irrigation controllers. When the Engineer determines that access to the controllers is required at other times, arrangements will be made to provide this access.

### PROGRESS INSPECTIONS

Progress inspections will be performed by the Engineer for completed highway planting and irrigation system work at designated stages during the life of the contract.

Progress inspections will not relieve the Contractor of responsibility for installation in conformance with the special provisions, plans and Standard Specifications. Work within an area shall not progress beyond each stage until the inspection has been completed, corrective work has been performed, and the work is approved, unless otherwise permitted by the Engineer.

The requirements for progress inspections will not preclude additional inspections of work by the Engineer at other times during the life of the contract.

The Contractor shall notify the Engineer, in writing, at least 4 working days prior to completion of the work for each stage of an area and shall allow a minimum of 3 working days for the inspection.

Progress inspections will be performed at the following stages of work:

A. During pressure testing of the pipelines on the supply side of control valves.
B. During testing of low voltage conductors.
C. Before planting begins and after completion of the work specified for planting in Section 20-4.03, "Preparing Planting Areas," of the Standard Specifications.
D. Before plant establishment work begins and after completion of the work specified for planting in Section 20-4.05, "Planting," of the Standard Specifications.
E. At intervals of one month during the plant establishment period.

### COST BREAK-DOWN

The Contractor shall furnish the Engineer a cost break-down for the contract lump sum items of highway planting and irrigation system. Cost break-down tables shall be approved, in writing, by the Engineer before any partial payment will be made for the applicable items of highway planting and irrigation system involved.

Cost break-downs shall be completed and furnished in the format shown in the samples of the cost break-downs included in this section. Line item descriptions of work shown in the samples are the minimum to be submitted. Additional line item descriptions of work may be designated by the Contractor. If the Contractor elects to designate additional line item descriptions of work, the quantity, value and amount for those line items shall be completed in the same manner as for the unit descriptions shown in the samples. The line items and quantities given in the samples are to show the manner of preparing the cost break-downs to be furnished by the Contractor.

The Contractor shall determine the quantities required to complete the work shown on the plans. The quantities and their values shall be included in the cost break-downs submitted to the Engineer for approval before 30 working days prior to the start of highway planting or irrigation system work. The Contractor shall be responsible for the accuracy of the quantities and values used in the cost break-downs submitted for approval.

The sum of the amounts for the line items of work listed in each cost break-down table for highway planting and for irrigation system work shall be equal to the contract lump sum price bid for Highway Planting and Irrigation System, respectively. Overhead and profit, shall be included in each individual line item of work listed in a cost break-down table.

No adjustment in compensation will be made in the contract lump sum prices paid for highway planting and irrigation system due to differences between the quantities shown in the cost break-downs furnished by the Contractor and the quantities required to complete the work as shown on the plans and as specified in these special provisions.

Individual line item values in the approved cost break-down tables will be used to determine partial payments during the progress of the work and as the basis for calculating an adjustment in compensation for the contract lump sum items of highway planting and irrigation system due to changes in line items of work ordered by the Engineer. When the total of ordered changes to line items of work increases or decreases the lump sum price bid for either Highway Planting or Irrigation System by more than 25 percent, the adjustment in compensation for the applicable lump sum item will be determined in the same manner specified for increases and decreases in the total pay quantity of an item of work in Section 4-1.03B, "Increased or Decreased Quantities," of the Standard Specifications.

**HIGHWAY PLANTING COST BREAK-DOWN**

**Contract No. 08-354804**

| UNIT DESCRIPTION | UNIT | APPROXIMATE QUANTITY | VALUE | AMOUNT |
|---|---|---|---|---|
| Plant Establishment Work | LS | Lump Sum | | |
| Plant (Group A) | EA | 2,061 | | |
| Mulch | M3 | 1,256 | | |
| Roadside Clearing | LS | Lump Sum | | |
| Soil Amendments | M3 | 41 | | |
| Commercial Fertilizer | KG | 250 | | |
| | | | | |
| | | | | |

**TOTAL** _____

**IRRIGATION SYSTEM COST BREAK-DOWN**

**Contract No. 08354804**

| UNIT DESCRIPTION | UNIT | APPROXIMATE QUANTITY | VALUE | AMOUNT |
|---|---|---|---|---|
| Control & Neutral Conductors | LS | Lump Sum | | |
| Check & Test Irrigation System | LS | Lump Sum | | |
| 25 mm Electric Remote Control Valve | EA | 1 | | |
| 40 mm Electric Remote Control Valve | EA | 15 | | |
| 50 mm Electric Remote Control Valve | EA | 6 | | |
| 50 mm Galvanized Steel Pipe Supply Line | M | 10 | | |
| 25 mm Plastic Pipe (PR 200) (Supply Line) | M | 4,180 | | |
| 32 mm Plastic Pipe (PR 200) (Supply Line) | M | 1,429 | | |
| 40 mm Plastic Pipe (PR 200) (Supply Line) | M | 352 | | |
| 50 mm Plastic Pipe (Sch 40) (Supply Line) | M | 5,266 | | |
| Sprinkler (Type C-3) | EA | 2,061 | | |
| 25 mm Water Meter | EA | 5 | | |
| 50 mm Gate Valve | EA | 20 | | |
| 40 mm Gate Valve | EA | 2 | | |
| 40 mm Backflow Preventer Assembly | EA | 5 | | |
| Backflow Preventer Assembly Enclosure | EA | 5 | | |
| 4 Station Solar Powered Irrigation Controller | EA | 3 | | |
| 6 Station Solar Powered Irrigation Controller | EA | 2 | | |
| | | | | |
| | | | | |

**TOTAL** _____

**MAINTAIN EXISTING PLANTED AREAS**

Existing planted areas shall be maintained throughout the life of the contract in conformance with these special provisions.

Attention is directed to "Preservation of Property" of these special provisions.

Existing plants shall be watered in conformance with the provisions in Section 20-4.06, "Watering," of the Standard Specifications.

Existing planted areas to be maintained shall be inspected for deficiencies by the Contractor in the presence of the Engineer. Deficiencies requiring corrective action shall include weeds; dead, diseased, or unhealthy plants; inadequate plant basins; and other deficiencies needing corrective action to promote healthy plant life. The inspection shall be completed within 10 working days after the start of work.

Deficiencies found during the inspection shall be corrected within 10 working days after the inspection ends. Correction of deficiencies, as directed by the Engineer, will be paid for as extra work in conformance with the provisions in Section 4-1.03D, "Extra Work," of the Standard Specifications.

When directed by the Engineer, existing plants shall be pruned and the work will be paid for as extra work in conformance with the provisions in Section 4-l.03D, "Extra Work," of the Standard Specifications.

After deficiencies have been corrected, the Contractor shall perform work to maintain existing planted areas in a neat appearance and to promote healthy plant growth. The work shall include the following:

A. Weeds shall be killed before the weeds reach the seed stage of growth or exceed 150 mm in length.
B. Trash, debris and weeds shall be removed from existing planted areas. Weeds shall be killed prior to removal. Trash, debris and weed removal in ground cover areas shall extend beyond the outer limits of ground cover areas to the adjacent edges of paving, fences and proposed plants and planting areas, and a 2-m diameter area centered at each existing tree and shrub.
C. Existing plant basins shall be kept well-formed and free of silt. If existing plant basins require repairs, and the plant basins contain mulch, the mulch shall be replaced after the plant basins have been repaired.
D. When a portion of a new automatic irrigation system is completed, the existing plants to be watered by that portion of the irrigation system shall be watered automatically.
E. Pesticides for maintaining existing planted areas shall conform to the provisions in "Pesticides" of these special provisions.

The contract lump sum price paid for maintain existing planted areas shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in maintain existing planted areas, complete in place, as shown on the plans, as specified in the standard specifications and these special provisions, and as directed by the Engineer.

**REMOVE EXISTING PLANTS FOR TRENCHING**

Removing existing plants for trenching shall conform to the provisions in Section 20-5.026, "Remove Existing Plants for Trenching," of the Standard Specifications and these special provisions.

Removing existing plants for trenching work shall consist of removing and replacing ground cover, pruning trees and shrubs within trench locations, and disposing of removed ground cover and prunings.

Replacement of removed ground cover within the maximum 1.8-m width, as specified in Section 20-5.026, "Remove Existing Plants for Trenching," of the Standard Specifications, will not be required.

Trees and shrubs adjacent to dikes, walks, fences, guard railing, and pavement edges may be pruned back 3 m from these facilities to facilitate trenching work. When trenching is to be performed adjacent to other trees and shrubs that cannot be avoided, the trees and shrubs may be pruned upon receipt of prior written approval of the Engineer.

Pruning shall include removal of deadwood, suckers, and broken or bruised branches 25 mm or larger in diameter. Pruning shall conform to the provisions in Section 20-4.055, "Pruning," of the Standard Specifications.

Removed ground cover and pruned materials shall be disposed of outside the highway right of way in conformance with the provisions in Section 7-l.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications. At the Contractor's option, removed ground cover and prunings may be reduced to chips. Chipped materials shall be spread within the highway right of way where designated by the Engineer.

Shrubs adjacent to dikes, fences, guard railing, and the edge of pavement within the 3-m pruned area designated above, that in the opinion of the Engineer should be removed after pruning, shall be removed and disposed of. Removing and disposing of the shrubs not otherwise provided for will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications.

## 10-2.02 EXISTING HIGHWAY IRRIGATION FACILITIES

The work performed in connection with the various existing highway irrigation system facilities shall conform to the provisions in "Existing Highway Facilities," of these special provisions.

Water shall be maintained in conformance with the provisions in Section 20-5.025, "Maintain Existing Water Supply," of the Standard Specifications.

### CHECK AND TEST EXISTING IRRIGATION FACILITIES

Existing irrigation facilities that are to remain and that are within those areas where clearing and grubbing or earthwork operations are to be performed, shall be checked for missing or damaged components and proper operation prior to performing clearing and grubbing or earthwork operations. Existing irrigation facilities outside of work areas that are affected by the construction work shall also be checked for proper operation.

Additional repairs required for the existing irrigation system as ordered by the Engineer, except as otherwise provided for in "Maintain Existing Irrigation Facilities" of these special provisions, will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications.

## 10-2.03 HIGHWAY PLANTING

The work performed in connection with highway planting shall conform to the provisions in Section 20-4, "Highway Planting," of the Standard Specifications and these special provisions.

### HIGHWAY PLANTING MATERIALS

#### Mulch

Mulch shall be wood chips.

#### Mulch

Mulch for plant basins shall be wood chips. Wood chips produced from tree trimmings may contain leaves and small twigs.

#### Commercial Fertilizer (Granular)

Commercial fertilizer (granular) shall be a pelleted or granular form and shall fall within 20 percent of the following guaranteed chemical analysis:

| Ingredient | Percentage |
|---|---|
| Nitrogen | 12 |
| Phosphoric Acid | 8 |
| Water Soluble Potash | 8 |

### ROADSIDE CLEARING

Within 30 days prior to preparing planting areas, trash and debris shall be removed from within the limits, of those planting areas. In addition to removing trash and debris, the project area shall be cleared as specified herein:

F. Weeds shall be killed within proposed mulch areas and within the area extending beyond the outer limits of the proposed mulch areas to the adjacent edges of shoulders, dikes, curbs, sidewalks, walls, existing planting and fences. At those locations where proposed mulch areas are 3.6 m or more from the adjacent edges of shoulders, dikes, curbs, sidewalks, walls, and fences, the clearing limit shall be 2 m beyond the outer limits of the proposed mulch areas.

H. Weeds shall be killed and removed within planting areas where plants are to be planted in groups or rows 4.6 m or less apart and from within an area extending 2 m beyond the outer limits of the groups or rows of plants.

O. Disposal of weeds killed during the initial roadside clearing will not be required, unless otherwise directed by the Engineer. When directed by the Engineer, killed weeds shall be disposed of and the disposal will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications.

After the initial roadside clearing is complete, additional roadside clearing work shall be performed as necessary to maintain the areas, as specified above, in a neat appearance until the start of the plant establishment period. This work shall include the following:

A. Trash and debris shall be removed.
C. Weed growth shall be killed before the weeds reach the seed stage of growth or exceed 75 mm in length.

**Weed Control**

Weed control shall also conform to the following:

A. Stolon type weeds shall be killed with glyphosate.
B. Tumbleweeds shall be removed by hand pulling before the tumbleweeds reach a height of 75 mm.
C. Removed weeds shall be disposed of outside the highway right of way in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

**PESTICIDES**

Pesticides used to control weeds shall conform to the provisions in Section 20-4.026, "Pesticides," of the Standard Specifications. Except as otherwise provided in these special provisions, pesticide use shall be limited to the following materials:

Cacodylic Acid
Diquat
Fluazifop-butyl
Glyphosate
Isoxaben (Preemergent)
Sethoxydim
Oxadiazon - 50 percent WP (Preemergent)
Oryzalin (Preemergent)
Pendimethalin (Preemergent)
Prodiamine (Preemergent)
Trifluralin (Preemergent)
Melfluidide (Growth regulator)
Napropamide (Preemergent)

Granular preemergents may be used when applied to areas that will be covered with mulch, excluding plant basins and hydroseeded native seed mix area. Granular preemergents shall be limited to the following materials:

Dichlobenil (Preemergent)
Oxadiazon (Preemergent)

Granular preemergents shall be applied prior to the application of mulch. Mulch applications shall be completed in these areas on the same working day. Photosensitive dye will not be required.

Glyphosate shall be used to kill stolon type weeds.

Oxadiazon shall be of the emulsifiable concentration or wettable powder type, except when Oxadiazon is used under mulch in conformance with these special provisions.

A minimum of 100 days shall elapse between applications of preemergents.

If the Contractor elects to request the use of other pesticides on this project, the request shall be submitted, in writing, to the Engineer not less than 15 days prior to the intended use of the other pesticides. Except for the pesticides listed in these special provisions, no pesticides shall be used or applied without prior written approval of the Engineer.

Pesticides shall not be applied in a manner that allows the pesticides to come in contact with the foliage and woody parts of the plants.

**PREPARE HOLES**

Holes for plants shall be excavated to the minimum dimensions shown on the plans.

Plant holes shall be excavated by drilling and shall have the sides of the holes scarified to 50 mm.

Backfill material for plant holes shall be a mixture of soil and other materials shown on the Plant List. Backfill material shall be thoroughly mixed and uniformly distributed throughout the entire depth of the plant hole without clods and lumps.

Full compensation for preparing holes shall be considered as included in the contract unit prices paid for the plants involved and no separate payment will be made therefor.

**PLANTING**

Backfill material for plant holes shall be a mixture of soil and soil amendment. The quantity of soil amendment shall be as shown on the Plant List. Soil amendment shall conform to the provisions in Section 20-2.03, "Soil Amendment," of the Standard Specifications. Backfill material shall be thoroughly mixed and uniformly distributed throughout the entire depth of the plant hole without clods and lumps.

Commercial fertilizer (pelleted and granular) shall be applied or placed at the time of planting and at the rates shown on the Plant List and in conformance with the provisions in Section 20-4.05, "Planting," of the Standard Specifications and these special provisions.

Plant holes shall be excavated by drilling and shall have the sides of the holes scarified to 50 mm.

A granular preemergent shall be applied to areas to be covered with mulch outside of plant basins in conformance with the provisions in "Pesticides" of these special provisions.

Mulch placed in areas outside of plant basins shall be spread to a uniform depth of 75 mm.

Mulch shall be spread from the outside of the proposed plant basin to the adjacent edges of shoulders, dikes, curbs, sidewalks, walls, fences, and existing plantings. If the proposed plant material is 3.6 m or more from the adjacent edges of shoulders, dikes, curbs, sidewalks, walls, fences, and other existing plantings, the mulch shall be spread 2 m beyond the outside edge of the proposed plant basins.

Mulch shall not be placed within one meter of the centerline of earthen drainage ditches, within one meter of the edge of paved ditches, and within one meter of the centerline of drainage flow lines.

Attention is directed to "Irrigation Systems Functional Test" of these special provisions regarding functional tests of the irrigation systems. Planting shall not be performed in an area until the functional test has been completed for the irrigation system serving that area.

**PLANT ESTABLISHMENT WORK**

The plant establishment period shall be Type 2 and shall not be less than 125 working days.

Attention is directed to "Relief From Maintenance and Responsibility" in these special provisions regarding relief from maintenance and protection.

Commercial fertilizer (slow release) shall be applied to trees, shrubs, vines and ground cover during the first week of March, July and October of each year. Commercial fertilizer shall be applied at the rates shown on the plans and shall be spread with a mechanical spreader wherever possible.

Weeds within mulched and ground cover areas and outside of plant basins shall be controlled by killing before reaching 75 mm in height.

Vines shall be trained onto fences and walls or through cored holes in walls.

At the option of the Contractor, a growth regulator may be applied to mowed areas, provided the growth regulator is approved in advance by the Engineer and the growth regulator is applied in conformance with these special provisions. If a growth regulator is approved and applied, the growth regulator shall be at the Contractor's expense.

At the option of the Contractor, plants of a larger container size than those originally specified may be used for replacement plants during the first 125 working days of the plant establishment period. The use of plants of a larger container size than those originally specified for replacement plants shall be at the Contractor's expense.

After 125 working days of the plant establishment period have been completed, replacement of plants, except for ground cover plants, shall be No. 1 size for seedlings, pot and liner size plants; No. 5 size for No. 1 size plants; No. 15 size for No. 5 size plants; and other plant replacement plants shall be the same size as originally specified.

The final inspection shall be performed in conformance with the provisions in Section 5-1.13, "Final Inspection," of the Standard Specifications and shall be completed a minimum of 20 working days before the estimated completion of the contract.

**10-2.04 IRRIGATION SYSTEMS**

Irrigation systems shall be furnished and installed in conformance with the provisions in Section 20-5, "Irrigation Systems," of the Standard Specifications, except materials containing asbestos fibers shall not be used.

Attention is directed to the provisions in "Obstructions" of these special provisions, regarding work over or adjacent to existing underground facilities. Excavation for proposed irrigation facilities shall not be started until the existing underground facilities have been located.

Method A pressure testing shall conform to the provisions in Section 20-5.03H(1), "Method A", of the Standard Specifications, except leaks that develop in the tested portion of the system shall be located and repaired after each test period when a drop of more than 35 kPa is indicated by the pressure gage. After the leaks have been repaired, the one hour pressure test shall be repeated and additional repairs made until the drop in pressure is 35 kPa or less.

Only pipeline trenches and excavation pits for supply lines being supplied from one water service point shall be open at one time. After pressure testing is complete, trenches and pits excavated for pipe supply lines, being supplied from one water

service point, shall be backfilled prior to commencing excavations for pipe supply lines being supplied from another water service point.

**VALVE BOXES**

Valve boxes shall conform to the provisions in Section 20-2.24, "Valve Boxes," of the Standard Specifications, except as otherwise provided herein.

Valve boxes shall be precast portland cement concrete, fiberglass or reinforced plastic.

Covers for concrete valve boxes shall be glass fiber reinforced plastic, plastic, concrete, cast iron or steel. Cast iron and steel covers shall be hinged with brass hinge pins for valve boxes containing valves smaller than 50 mm.

Valve boxes shall be identified on the top surface of the covers by branding the appropriate abbreviations for the irrigation facilities contained in the valve boxes as shown on the plans. Valve boxes that contain remote control valves shall be identified by the appropriate letters and numbers (controller and station numbers). The letters and numbers shall be 50 mm in height.

Valve boxes shall be identified on the top surface of the covers by labels containing the appropriate abbreviation for the irrigation facility contained in the valve box as shown on the plans. Valve boxes that contain remote control valves shall be identified by the appropriate letters and numbers (controller and station numbers). Labels for valve boxes shall conform to the provisions in Section 20-5.03F, "Valves and Valve Boxes," of the Standard Specifications.

Label material shall be plate plastic.

**ELECTRIC AUTOMATIC IRRIGATION COMPONENTS**

**Irrigation Controllers**

The ambient light automatic irrigation controllers shall conform to the following:

A. Irrigation controllers, shall operate on a photovoltaic power system computer with a lockable waterproof vandal resistant case, and shall be manufactured as one complete unit.
B. Power shall be available for continuous 24-hour operation at a minimum light equivalent of 25 percent of ambient light at 55 degrees latitude.
C. The computer liquid-crystal display shall be powered by a 9-volt battery key mechanism.
D. The irrigation controller shall have an output digital control pulse at 3.5-volts which __will operate a valve solenoid within a 300 meter distance.
E. The Irrigation controller shall be fully automatic and capable of operating a complete one day to 90 day cycle, scheduling of up to 32 totally independent programs, with each having its own start time, day cycle, assigned stations, duration, and program time. Each station shall be capable of 1 minute to 24-hour operation in one-minute increments and shall have separate settings for hours and minutes.
F. The Irrigation controller shall have an emergency program backup system with a user defined fail-safe program and system parameters, which are stored in a non-erasable memory.
G. The Irrigation controller shall be installed as shown on the plans in accordance with the manufacturer's specifications.
H. The watering time of each station shall be displayed on the face of the control panel.

**Irrigation Controller Enclosure Cabinet**

The Irrigation controllers shall be enclosed in stainless steel enclosure cabinets with inside mounted hinges and an inside mounting clamp. The Enclosure shall be equipped with a stainless steel lock. Prior to acceptance of the contract, 2 keys shall be delivered to the Engineer. The enclosure top cover shall be a poly carbonate product, shall be highly resistant to crazing, staining, discoloration, creep, warping, and the long range deleterious effects of vehicle fumes, direct sunlight, heat (up to 90'C), water, oils, and aging. The enclosure cover shall allow sufficient ambient light into the enclosure to operate the controller.

**Electric Remote Control Valves**

Electric remote control valves shall conform to the provisions in Section 20-2.23, "Control Valves," of the Standard Specifications and the following:

A. Valves shall be cast iron construction with brass bonnet.
B. Valves shall be straight pattern (side inlet) as shown on the plans.
C. Valve solenoids for (ambient light) controller shall be DC latching and operate on 3.5 V and shall be compatible with the irrigation controller.

D. Valves shall be provided with a factory installed filter-cleaning devices.
E. Valves shall be equipped with an internal manual bleed.

**Pull Boxes**

Pull box installations shall conform to the provisions in Section 20-5.027I, "Conductors, Electrical Conduits and Pull Boxes," of the Standard Specifications.

**Conductors**

Low voltage, as used in this section "Conductors," shall mean 36 V or less. Conductors shall be a minimum number 12 size wire.

Low voltage control and neutral conductors in pull boxes and valve boxes, at irrigation controller terminals, and at splices shall be marked with adhesive cloth wrap-around markers.

Low voltage control and neutral conductors in pull boxes and valve boxes, at irrigation controller terminals, and at splices shall be marked as follows:

A. Conductor terminations and splices shall be marked with adhesive backed paper markers or adhesive cloth wrap-around markers, with clear, heat-shrinkable sleeves sealed over the markers.

Markers for the control conductors shall be identified with the appropriate number or letter designations of irrigation controllers and station numbers. Markers for neutral conductors shall be identified with the appropriate number or letter designations of the irrigation controllers.

The color of low voltage neutral and control conductor insulation, except for the striped portions, shall be homogeneous throughout the entire thickness of the insulation.

Type "C," Type "S" or type "T" splices shall be used. Splices for low voltage control and neutral conductors shall conform to provisions in Section 86-2.09C, "Connectors and Terminals," 86-2.09D, "Splicing," and 86-2.09E, "splice Insulation," of the Standard Specifications, except type "S" splices shall be soldered.

Insulation for conductors may be UL listed polyethylene conforming to UL44 test standards with a minimum insulation thickness of 1.05 mm for wire sizes 10AWG and smaller.

Relief from maintenance and responsibility for electric automatic irrigation components will be granted in conformance with "Relief from Maintenance and Responsibility" of these special provisions. Before the Engineer grants relief from maintenance and responsibility, the functional test specified in Section 20-5.027J, "Testing," of the Standard Specifications shall be satisfactorily completed, and the manufacturer's written instructions shall be provided to the Engineer on the use and adjustment of the installed irrigation controllers.

**ARMOR-CLAD CONDUCTORS**

Armor-clad conductors shall be used in direct burial applications from pull boxes adjacent to irrigation controller to remote control valves and other irrigation facilities in conformance with the details shown on the plans and these special provisions.

Armor-clad conductors shall conform to the following:

A. Conductors shall be the proper size for the application, and shall be solid, uncoated copper with a conductor size not less than 90 percent of the AWG diameter required.
B. At the Contractor's option, conductor insulation coverings shall be either of the following:

    1. Polyvinyl chloride (PVC) conforming to UL style, Type UF 60°C, 600 V. Average thickness of insulation shall be not less than 1.52 mm, with a minimum thickness of 1.37 mm, or
    2. UL listed polyethylene conforming to UL44 test standards with a minimum insulation thickness of 1.05 mm for wire sizes 10AWG and smaller.

C. Armor shall be a minimum 0.13-mm thick by 12.7 mm wide Type 304 stainless steel tape that is helically wrapped over each conductor with a 33 percent minimum overlap.
D. Outer jacket for conductors shall be sunlight resistant PVC and shall conform to the Insulated Power Cable Engineer's Association (ICEA) S-61-402, NEMA Standard WC5, and UL Listing 1263. Nominal thickness of the outer jacket shall be 0.76-mm with a minimum thickness of 0.61-mm.

Conductors conforming to the provisions in Section 20-2.31D, "Conductors," of the Standard Specifications shall be used when the conductors are installed in an electrical conduit.

Armor-clad conductors will be measured and paid for as control and neutral conductors.

**IRRIGATION SYSTEMS FUNCTIONAL TEST**

Functional tests for the irrigation controllers and associated automatic irrigation systems shall conform to the provisions in Section 20-5.027J, "Testing," of the Standard Specifications and these special provisions.

Tests shall demonstrate to the Engineer, through one complete cycle of the irrigation controllers in the automatic mode, that the associated automatic components of the irrigation systems operate properly. If automatic components of the irrigation systems fail a functional test, these components shall be repaired at the Contractor's expense and the testing repeated until satisfactory operation is obtained.

Associated automatic components shall include, but not be limited to remote control valves.

Upon completion of work on an irrigation system, including correction of deficiencies and satisfactory functional tests for the systems involved, the plants to be planted in the area watered by the irrigation system may be planted provided the planting areas have been prepared as specified in these special provisions.

**PIPE**

**Plastic Pipe**

Plastic pipe supply lines shall be polyvinyl chloride (PVC) 1120 or 1220 pressure rated pipe with the minimum pressure rating of (PR200) unless otherwise specified below.

Plastic pipe supply lines that are larger than 40 mmin diameter shall be schedule 40 PVC pipe and shall conform to the requirements of ASTM designation: 1785.

Plastic pipe supply lines that are 65 mm in diameter shall be (PR) 315 pressure rated pipe. Plastic pipe supply lines shall have solvent cemented type joints. Primers shall be used on the solvent cemented type joints.

Fittings for plastic pipe supply lines with a pressure rating (PR) of 315 shall be Schedule 80.

**WATER METER**

Water meters for the irrigation systems will be furnished and installed by the serving utility at the locations shown on the plans.

Upon receipt of a written request from the Contractor, the Engineer will make arrangements with the serving utility to install the water meters. The State will pay the costs and fees charged by the serving utility for the installations.

**BACKFLOW PREVENTER ASSEMBLIES**

Backflow preventers shall conform to the provisions in Section 20-2.25, "Backflow Preventers," of the Standard Specifications and these special provisions.

Pressure loss through the backflow preventers shall not exceed the following:

| BACKFLOW PREVENTER SIZE (millimeters) | FLOW RATE (Liters per minute) | PRESSURE LOSS (kPa) |
|---|---|---|
| | | |
| | | |
| | | |
| | | |

Backflow preventer assemblies shall be painted with a minimum of 2 applications of a commercial quality enamel paint. The color of the paint shall be light brown.

**BACKFLOW PREVENTER ASSEMBLY ENCLOSURE**

Enclosures shall be fabricated of structural steel angles and flattened expanded metal and shall be installed over backflow preventer assemblies on a portland cement concrete pad as shown on the plans and in conformance with these special provisions.

Expanded metal for sides, ends and top panels shall be fabricated from 1.9 mm (14-gage), minimum thickness, sheet steel. The flattened expanded metal openings shall be approximately 20 mm by 45 mm in size.

Expanded metal panels shall be attached to the steel frames by a series of welds, not less than 6.4 mm in length and spaced not more than 100 mm on centers, along the edges of the enclosure.

Enclosure door handles shall have provisions for padlocking in the latched position. Padlocks will be State-furnished. Attention is directed to "State-furnished Materials" of these special provisions.

Enclosures shall be galvanized, after fabrication, in conformance with the provisions in Section 75-1.05, "Galvanizing," of the Standard Specifications.

Concrete for the concrete pad shall conform to the provisions in Section 20-2.26, "Concrete," of the Standard Specifications.

Hold down bolt assemblies shall be galvanized and shall be installed when the portland cement concrete pad is still plastic. Nuts shall be hexagonal and washers shall be the lock type.

Enclosures shall be painted with one application of a commercial quality pre-treatment, vinyl wash primer and a minimum of one application of a commercial quality, exterior enamel for metal. The finish color shall be light brown.

All parts of the backflow preventer assembly enclosure, including hold down assemblies, may be constructed of stainless steel instead of standard steel materials specified above. Stainless steel enclosures shall conform to the provisions herein except galvanizing, priming and painting shall not be required. Stainless steel enclosures shall be powder coated a light brown color by the manufacturer.

The minimum clearance between the backflow preventer assembly and the backflow preventer assembly enclosure shall be 50 mm. The concrete pad shall extend a minimum of 50 mm beyond the outer limits of the backflow preventer assembly enclosure, unless otherwise shown on the plans or specified in these special provisions.

The quantity of backflow preventer assembly enclosures will be measured by the unit as determined from actual count in place.

The contract unit price paid for the backflow preventer assembly enclosure shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing and installing a backflow preventer assembly enclosure, complete in place, including constructing the portland cement concrete pad, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

**TESTING NEW BACKFLOW PREVENTERS**

New backflow preventers shall be tested for proper operation in conformance with the provisions in Section 20-5.03J, "Check and Test Backflow Preventers," of the Standard Specifications and these special provisions.

Tests for new backflow preventers shall be satisfactorily completed after installation and before operation of the irrigation systems.

New backflow preventers shall be retested one year after the satisfactory completion of the previous test, and each year thereafter until the plant establishment period is completed. An additional test shall be provided not more than 10 days prior to acceptance of the contract.

**SPRINKLERS**

Sprinklers shall conform to the type, pattern, material, and operating characteristics listed in the "Sprinkler Schedule" shown on the plans.

**FINAL IRRIGATION SYSTEM CHECK**

A final check of existing and new irrigation facilities shall be performed not more than 20 working days prior to acceptance of the contract.

The length of watering cycles using potable water measured by water meters for the final check of irrigation facilities will be determined by the Engineer.

Remote control valves connected to existing and new irrigation controllers shall be checked for automatic performance when the controllers are in automatic mode.

Unsatisfactory performance of irrigation facilities installed or modified by the Contractor shall be repaired and rechecked at the Contractor's expense until satisfactory performance is obtained, as determined by the Engineer.

Repair or replacement of existing irrigation facilities due to unsatisfactory performance shall conform to the provisions in "Existing Highway Irrigation Facilities" of these special provisions.

Nothing in this section "Final Irrigation System Check" shall relieve the Contractor of full responsibility for making good or repairing defective work or materials found before the formal written acceptance of the entire contract by the Director.

Full compensation for checking the irrigation systems prior to the acceptance of the contract shall be considered as included in the contract lump sum price paid for plant establishment work and no additional compensation will be allowed therefor.

## SECTION 10-3. SIGNALS, LIGHTING AND ELECTRICAL SYSTEMS

### 10-3.01 DESCRIPTION

Modifying lighting and sign illumination, traffic monitoring stations, sprinkler control conduit and fiber optic system shall conform to the provisions in Section 86, "Signals, Lighting and Electrical Systems," of the Standard Specifications and these special provisions.

Lighting equipment is included in the following structures:

A. Wineville Road Undercrossing (Bridge No. 56-601)
B. Mira Loma Overcrossing (Bridge No. 56-602)
C. Etiwanda Ave Undercrossing (Bridge No. 56-603)
D. San Sevaine Channel (Bridge No. 56-645)
E. Cambell St. Undercrossing (Bridge No. 56-526)
F. Pyrite St. Undercrossing (Bridge No. 56-528)
G. Camino Real Undercrossing (Bridge No. 56-661)

Communication conduit is included in the following structures:

A. Wineville Road Undercrossing (Bridge No. 56-601)
B. Mira Loma Overcrossing (Bridge No. 56-602)
C. Etiwanda Ave Undercrossing (Bridge No. 56-603)
D. San Sevaine Channel (Bridge No. 56-645)
E. Cambell St. Undercrossing (Bridge No. 56-526)
F. Pyrite St. Undercrossing (Bridge No. 56-528)
G. Camino Real Undercrossing (Bridge No. 56-661)

Sprinkler control conduit is included in the following structures:

A. Wineville Road Undercrossing (Bridge No. 56-601)
B. Mira Loma Overcrossing (Bridge No. 56-602)
C. Etiwanda Ave Undercrossing (Bridge No. 56-603)
D. San Sevaine Channel (Bridge No. 56-645)
E. Cambell St. Undercrossing (Bridge No. 56-526)
F. Pyrite St. Undercrossing (Bridge No. 56-528)
G. Camino Real Undercrossing (Bridge No. 56-661)

### 10-3.02 COST BREAK-DOWN

Cost break-downs shall conform to the provisions in Section 86-1.03, "Cost Break-Down," of the Standard Specifications and these special provisions.

The Engineer shall be furnished a cost break-down for each contract lump sum item of work described in this Section 10-3.

The cost break-down shall be submitted to the Engineer for approval within 15 days after the contract has been approved. The cost break-down shall be approved, in writing, by the Engineer before any partial payment for the items of electrical work will be made.

The cost breakdown shall include the following items in addition to those listed in the Standard Specifications:

A. Fiber optic conduit.
B. Fiber optic inner duct
C. Fiber Optic Splice Vault

### 10-3.03 MAINTAINING EXISTING AND TEMPORARY ELECTRICAL SYSTEMS

Lighting system shutdowns shall be limited to periods between the hours of 9 a.m. and 3 p.m.

### 10-3.04 FOUNDATIONS

Reinforced cast-in-drilled-hole concrete pile foundations for traffic signal and lighting standards shall conform to the provisions in "Piling" of these special provisions.

## 10-3.05 STANDARDS, STEEL PEDESTALS, AND POSTS

Standards, steel pedestals, and posts for traffic signal and lighting standards shall conform to the provisions in Section 86-2.04, "Standards, Steel Pedestals and Posts," of the Standard Specifications, "Steel Structures" of these special provisions, and the following requirements.

Steel bolts not designated on the plans as high-strength (HS) or stainless steel bolts shall be for general applications and shall conform to the requirements in ASTM Designation: A 307.

Handhole reinforcement rings for standards, steel pedestals, and posts shall be continuous around the handholes.

## 10-3.06 CONDUIT

Conduit to be installed underground shall be Type 1 unless otherwise specified. Detector termination conduits shall be Type 3.

The conduit in a foundation and between a foundation and the nearest pull box shall be Type 1.

Conduit sizes shown on the plans and specified in the Standard Specifications and these special provisions are referenced to metallic type conduit. When rigid non-metallic conduit is required or allowed, the nominal equivalent industry size shall be used as shown in the following table:

| Size Designation for Metallic Type Conduit | Equivalent Size for Rigid Non-metallic Conduit |
|---|---|
| 21 | 20 |
| 27 | 25 |
| 41 | 40 |
| 53 | 50 |
| 63 | 65 |
| 78 | 75 |
| 103 | 100 |

After conductors have been installed, the ends of conduits terminating in pull boxes, service equipment enclosures, and controller cabinets shall be sealed with an approved type of sealing compound.

Conduit shall not installed by trenching method across freeways or ramps.

### STEEL SLEEVES

254 mm steel sleeves shall consist of welded steel pipe conduit conforming to the provisions of ASTM Designation: A 53. Welded steel pipe shall be either black or galvanized pipe and shall have welded or threaded joints. Minimum wall thickness shall be 6.3mm Installation of 254 mm steel sleeve shall conform to the provisions in Section 20-5.03B, "Conduit for Water Line Crossovers and Sprinkler Control Crossovers," of the Standard Specifications.

The ends of the sleeves shall be sealed with a 13.6 kg asphalt saturated felt paper layer and a 150 mm concrete cap.

### FIBER OPTIC CONDUIT

Fiber optic conduit is defined as conduit that will contain innerduct and/or fiber optic cable, as shown on the plans. Furnishing and installing fiber optic conduit shall conform to the provisions for other conduits, and the following.

All fiber optic conduit shall be either Type 1 or Type 3**.**

Conduit trenches in or adjacent to paved shoulders shall be backfilled within 3 calendar days. Conduit trenches in and across traffic lanes shall be backfilled during the same work period the trench is excavated except that the top 30 mm of asphalt shall be placed within 3 calendar days.

Type 1 conduit shall be used for conduit attached to the exterior of a bridge or for conduit between a bridge and an adjacent splice vault and for conduit installed under freeway entrance-and exit ramps.

Direct coupling of Type 1 to Type 3 fiber optic conduit will be permitted at underground locations by means of an industry standard rigid non-metallic conduit coupling. The coupling shall be the type for joining threaded conduit to solvent welded conduit.

Type 1 conduit shall be used for fiber optic conduit bends, except when using conduit with integral innerduct. Minimum conduit bend radius shall be 10 times trade diameter.

When fiber optic conduit is placed in a trench, that is not in a pavement area, the trench shall be backfilled with commercial quality colored concrete, as described elsewhere in these special provisions, containing not less than 250 kg of portland cement per cubic meter, to the dimensions shown on the plans. The trench shall be wide enough for a minimum of 25 mm of concrete between the wall of the trench and the side of the conduit.

Concrete used to backfill trenches shall have a 24-hour curing period. The trenches shall have barricades with "Open Trench" signs posted at the beginning of the trench and every 60 m.

All jacked conduit shall be Type 1. No trenching shall be allowed across freeways and ramps.

Immediately prior to installing innerduct, conduit shall be blown out with compressed air until all foreign material is removed.

After innerduct has been installed, the ends of conduits and innerduct shall be sealed with an approved type of conduit sealing plug.

**MULTIDUCT CONDUIT**

Where Size 103 conduit with innerduct is to be installed by trenching, a factory assembled conduit system with four innerducts will be allowed.

The conduit shall be Schedule 40 PVC. Each innerduct shall be Size 25(25 mm I.D. nominal), manufactured from polyethylene or PVC. Each innerduct shall be a different color and shall be consistent for the project. UL listing is not required.

Polyethylene innerduct shall conform to the special provisions described under "INNERDUCTS" and have longitudinally ribbed, with a minimum wall thickness of 1.9 mm.

PVC innerduct shall have a minimum wall thickness of 2.2 mm.

Straight segments of multiduct conduit shall be nominal 6.1 m lengths with a minimum 125 mm slip joint. Joints shall be keyed to mate the enclosed innerducts and shall lock together or be provided with a seating mark to verify proper assembly. The joint shall be solvent welded or sealed with a gasket as recommended by the manufacturer. Factory manufactured end sections shall be provided.

Bends shall be rigid factory assembled sections or shall be formed from factory assembled flexible sections, designed to fit the system.

Prior to joining the last sections of the conduit run, the innerduct colors at the ends shall be verified to be consistent.

**CONDUIT AND INNERDUCT SEALING PLUGS**

Except as otherwise noted, all fiber optic conduits and innerducts shall have their ends sealed with commercial preformed plugs which prevent the passage of gas, dust and water into these conduits and their included innerducts. Sealing plugs shall be installed within each splice vault

Sealing plugs shall be removable and reusable. Plugs sealing innerducts, shall be the split type that permits installation or removal without removing conductors or cables.

Sealing plugs that seal between the Size 103 fiber optic conduit and innerducts shall seal the conduit and all innerducts simultaneously with one self contained assembly having an adjustable resilient filler of polyurethane elastomer clamped between backing ends and compressed with stainless steel hardware.

Sealing plugs that seal the innerducts shall seal each innerduct individually with appropriate sizes and configuration to accommodate either empty ducts or those containing fiber optic cable. To provide suitable sealing between the varying size cables and the plugs, split polyurethane elastomer adapting sleeves, used singularly or in multiples, shall be inserted within the body of the plugs.

Sealing plugs used to seal Size 103 fiber optic conduit and innerducts shall be capable of withstanding a pressure of 34.5 kPa.

A sealing plug that seals an empty conduit or innerduct shall have an eye or other type of capturing device (on the side of the plug that enters the conduit) to attach onto the pull tape, so the pull tape will be easily accessible when the plug is removed.

**TRACER WIRE**

Tracer wire shall be provided and placed in fiber optic conduits.Tracer wire shall be a No. 12, minimum, solid copper conductor with Type TW, THW, RHW, or USE insulation. The tracer wire shall form a mechanically and electrically continuous line throughout the length of the trench. A minimum of 1 m of slack shall be extended into each splice vault from each direction.

Tracer wire may be spliced at intervals of not less than 150 m. Splices shall conform to Section 86-2.09, "Wiring," of the Standard Specifications.

**WARNING TAPE**

Warning tape shall be provided and placed in the trench over fiber optic conduits as shown on the plans. The warning tape shall be 100 mm wide with bold printed black letters of approximately 19 mm on bright orange color background, and contain the printed warning "CAUTION BURIED FIBER OPTIC CABLE - CALTRANS" repeated at approximately 760 mm intervals.

The printed warning shall be non-erasable and shall be rated to last with the tape for a minimum of 40 years.

The construction of the warning tape shall be such that it will not delaminate when it is wet. It shall be resistant to insects, acid, alkaline and other corrosive elements in the soil. It shall have a minimum of 712 N. tensile strength per 150 mm wide strip and shall have a minimum of 700 percent elongation before breakage.

**COLORED CONCRETE BACKFILL**

The concrete backfill for the installation of fiber optic conduits shall be a medium to dark, red or orange color to clearly distinguish the concrete backfill from other concrete and soil. The concrete shall be pigmented by the addition of commercial quality cement pigment to the concrete mix. The red or orange concrete pigment shall be LM Scofield Company; Orange Chromix Colorant; Davis Colors; or equal.

For trenches in pavement areas, only the top 102mm of concrete backfill will be required to be pigmented concrete. At the option of the Contractor, the full depth may have the pigment.

**INNERDUCT**

Innerduct shall be installed wherever fiber optic cable is installed in conduit.

The size and number of innerduct shall be as shown on the plans.

Innerduct consists of an extruded flexible annealed polyethylene tubing that is installed inside electrical conduit, and which in turn the fiber optic cable is installed. Innerduct within a conduit run shall be continuous without splices or joints. Innerduct for this project shall be continuous longitudinally ribbed inside and outside.

Unless otherwise shown on the plans, innerduct for this project shall be nominal 19 mm inside diameter, with wall thickness of 2000 μm ±80 μm, and shall meet the following requirements:

Polyethylene for innerduct shall have a density of 0.955 ±0.005 gm/cm$^3$ (ASTM Standard D-1505), and shall conform to the applicable portions of ASTM Designations: D 3485, D 3035, D 2239, and D 2447, and the applicable portions of NEMA TC7 and TC2. Tensile yield strength shall be 22.7 MPa, minimum (ASTM D-638).

The innerduct shall be shipped on reels marked with the manufacturer, the contract number, and the size and length of the innerduct. The product on reels shall be covered with aluminized material to protect colors from UV deterioration during shipment and storage.

Immediately prior to installing innerducts, all conduits shall be blown out with compressed air until all foreign material is removed. After cables, conductors and innerduct have been installed, the ends of innerducts shall be sealed with an approved type of sealing plugs.

A manufacturer recommended lubricant shall be applied between the innerducts and the conduit during installation to reduce friction.

Installation procedures shall conform to the procedures specified by the innerduct manufacturer. If the innerduct is installed using mechanical assistance, a dynamometer shall be used to record installation tension and a tension limiting device shall be used to prevent exceeding the maximum pulling tension during installation. The tension shall be set to the manufacturer's maximum limit. The maximum pulling tension shall be recorded for each innerduct run. The innerduct shall not be stressed beyond the minimum bending radius allowed by either the innerduct or fiber optic cable manufacturer.

Immediately prior to installing cables, innerduct shall be blown out with compressed air until all foreign material is removed. After cables have been installed, the ends of innerducts shall be sealed with an approved type of rubber conduit plug.

Each innerduct shall be one continuous unit within a conduit run.

**10-3.07 ROUND TRAFFIC FIBER OPTIC SPLICE VAULTS**

Fiber optic splice vaults shall conform to the Western Underground Committee Guide No. 3.6, "Nonconcrete Enclosures," except where differences are noted here or detailed on the plans. Dimensions of round traffic fiber optic splice vaults shall be as shown on the plans.

Fiber optic splice vault covers shall be rated for AASHTO HS 20-44 loading and shall be installed at the locations and in the manner shown on the plans. Concrete place around and under traffic splice vaults shall be minor concrete and shall contain not less than 325 kg of portland cement per cubic meter.

Hangers shall be made of a non-corroding material and be free of any sharp edges. A separate hanger shall be provided for each type of fiber optic cable and be securely fastened to the side wall of the vault allowing the slack fiber optic cable to be neatly coiled in a circular configuration.

Pulling eyes shall be installed as necessary to accommodate pulling of cables.

Tops of fiber optic vaults shall be installed at grade in paved areas and 25 mm above grade in unpaved areas.

**10-3.08 CONDUCTORS AND WIRING**

Splices shall be insulated by "Method B".

The minimum insulation thickness, at any point, for Type USE, RHH or RHW wire shall be 1.0 mm for conductor sizes No. 14 to No. 10, inclusive, and 1.3 mm for No. 8 to No. 2, inclusive. The minimum insulation thickness, at any point, for Type THW and TW wires shall be 0.69 mm for conductor sizes No. 14 to No. 10, inclusive, 1.02 mm for No. 8, and 1.37 mm for No. 6 to No. 2, inclusive.

### 10-3.09 BONDING AND GROUNDING

Bonding and grounding shall conform to the provisions in Section 86-2.10, "Bonding and Grounding," of the Standard Specifications and these special provisions.

Bonding jumpers in standards with handholes and traffic pull box lid covers shall be attached by a UL listed lug using 4.5-mm diameter or larger brass or bronze bolts and shall run to the conduit or bonding wire in the adjacent pull box. The grounding jumper shall be visible after the standard has been installed and the mortar pad and cap have been placed on the foundation.

Standards without handholes shall have bonding accomplished by jumpers attached to UL listed ground clamps on each anchor bolt.

For slip base standards or slip base inserts, bonding shall be accomplished by jumpers attached to UL listed ground clamps on each anchor bolt, or a UL listed lug attached to the bottom slip base plate with a 4.5-mm diameter or larger brass or bronze bolt.

Equipment bonding and grounding conductors are required in conduits, except when the conduits contain combinations of loop lead-in cable, fiber optic cable, or signal interconnect cable. A No. 8 minimum, bare copper wire shall run continuously in circuits, except for series lighting circuits, where No. 6 bare copper wire shall run continuously. The bonding wire size shall be increased to match the circuit breaker size in conformance with the Code, or shall be as shown on the plans. Conduits to be installed for future conductors, may omit the copper wire.

Bonding of metallic conduits in metal pull boxes shall be by means of bonding bushings and bonding jumpers connected to the bonding wire running in the conduit system.

### 10-3.10 SERVICE

Continuous welding of exterior seams in service equipment enclosures is not required.

Circuit breakers shall be the cable-in/cable-out type, mounted on non-energized clips. All circuit breakers shall be mounted vertically with the up position of the handle being the "ON" position.

The Contractor shall pay for all connection fees.

### 10-3.11 DETECTORS

Loop detector sensor units will be State-furnished in conformance with the provisions in "Materials" of these special provisions.

Loop wire shall be Type 2.

Loop detector lead-in cable shall be Type B.

Slots shall be filled hot-melt rubberized asphalt sealant.

### 10-3.12 TRAFFIC MONITORING STATION

Traffic monitoring station shall conform to the details shown on the plans and these special provisions.

The Type 334 cabinet and inductive loop detector sensor units, but without anchor bolts, will be State-furnished as provided under "Materials" of these special provisions.

The Contractor shall construct each controller cabinet foundation as shown on the standard plan ES-3C plans for Model 332 and 334 cabinets (including furnishing and installing anchor bolts), shall install the controller cabinet on the foundation, and shall make field wiring connections to the terminal blocks in the controller cabinet.

Inductive loop detectors for traffic monitoring station and the installation thereof shall conform to the provisions in "Detectors" of these special provisions.

Terminal strips, convenience outlet, lighting fixture, circuit protection device and switches shall be provided as detailed as directed by the engineer.

The exact location of the cabinet will be determined by the Engineer.

Sensor units shall be labeled in conformance with the provisions in Section 86-3.05A, "Labels," of the Standard Specifications.

### 10-3.13 LUMINAIRES

Ballasts shall be the lag regulatory type.

### 10-3.14 SIGN LIGHTING FIXTURES-INDUCTION

Induction sign lighting fixtures shall conform to the provisions for mercury sign lighting fixtures in Section 86-6.05, "Sign Lighting Fixtures-Induction Light," of the Standard Specifications and these special provisions.

Each fixture shall consist of a housing with door, a reflector, refractor or a lens, a lamp, a power coupler, a high frequency generator and a fuse block. Retrofit kits shall be installed as shown on the plans.

Fixtures shall have a minimum average rating of 60 000 hours. Fixtures shall be for a wattage of 87 W, 120/240 V (ac). The power factor of the fixtures shall be greater than 90 percent and the total harmonic distortion shall be less than 10 percent. Fixtures shall be Underwriter's Laboratories (UL) approved for wet locations and be Federal Communications Commission (FCC) Class A listed.

The weight of the fixture shall not exceed 20 kg. The manufacturer's brand name, trademark, model number, serial number and date of manufacture shall be located on the packaged assembly and permanently marked on the outside and inside of the housing.

**MATERIALS**

**Mounting Assembly**

The mounting assembly may be either cast aluminum, hot-dip galvanized steel plate or steel plate that has been galvanized and finished with a polymeric coating system or the same finish that is used for the housing.

**Housing**

Housings shall have a door designed to hold a refractor or lens. Housing doors shall be designed to be opened without the use of tools. Housings and doors shall have a powder coat or polyester paint finish of a gray color resembling unfinished fabricated aluminum.

**Refractor**

Refractors or lenses shall have smooth exteriors. Lenses shall be flat or convex. Convex lenses shall be made from heat resistant, high-impact resistant, tempered glass.

Convex lenses shall be designed or shielded so that no fixture luminance is visible when the fixture is approached directly from the rear and the viewing level is the bottom of the fixture. When a shield is used it shall be an integral part of the door casting.

**Lamp**

Each fixture shall be furnished with a 85-W induction lamp. Interior lamp walls shall be fluorescent phosphor coated. Lamp light output shall be at least 70 percent at 60 000 hours. Lamps shall have a minimum color-rendering index of 80. Lamps shall be rated at a color temperature of 4 000°C. Lamps shall be removable without the use of tools.

**Power Coupler**

Power couplers shall consist of a construction base with antenna, heat sink and electrical connection cable.

The power coupler shall be designed so that it can be removed with common hand tools.

**High Frequency Generator**

High frequency generators shall start and operate lamps at an ambient temperature of -25°C or greater for the rated life of the lamp.

Generator output frequency shall be 2.65 MHz +/- 10 percent. The generator radio frequency interference shall meet the requirements of the Federal Communications Commission Title 47, Part 18, regulations concerning harmful interference.

High frequency generators shall operate continuously at ambient air temperatures from -25°C to 25°C without reduction in generator life. High frequency generators shall have a design life of at least 100 000 hours at 55°C.

High frequency generators shall be capable of being replaced with common hand tools. Conductor terminals shall be identified as to the component terminal to which they connect.

High frequency generators shall be mounted to use the fixture upon which they are mounted as a heat sink.

A Certificate of Compliance conforming to the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications, and a copy of the high frequency generator test methods and results shall be submitted by the manufacturer with each lot of fixtures. The certificate shall state that the high frequency generators meet the requirements of this section and the generator specifications of the lamp manufacturer.

## 10-3.15 REMOVING, REINSTALLING OR SALVAGING ELECTRICAL EQUIPMENT

Salvaged electrical materials shall be hauled to 175 W. Cluster Street, San Bernardino, California 92401 and stockpiled.

The Contractor shall provide the equipment, as necessary, to safely unload and stockpile the material. A minimum of 2 working days' notice shall be given prior to delivery.

### 10-3.16 PAYMENT

The contract lump sum price paid for fiber optic system shall include full compensation for furnishing all labor, material, tools, equipment, and incidentals, and for doing all the work involved in modify and installing fiber optic system, complete in place, including conduit, innerduct, sealing plugs, color concrete backfill, tracer wire, warning tape, fiber optic splice vaults, and including all incidental items required to provide full equipment operation, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

The contract price paid per meter for sprinkler control conduit (bridge) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in sprinkler conduit (bridge), complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Full compensation for conduit placed on the bridge not covered per meter shall be considered as included in the contract lump sum price paid for the items involved and no separate payment/additional compensation will be made.

Full compensation for hauling and stockpiling electrical materials shall be considered as included in the contract price paid for the item requiring the material to be salvaged and no additional compensation will be allowed therefor.

## SECTION 11. (BLANK)

## SECTION 12. (BLANK)

## SECTION 13. RAILROAD RELATIONS

### 13-1.01 GENERAL

The term "Railroad" shall mean the Union Pacific Railroad Company.

It is expected that Railroad will cooperate with the Contractor to the end that the work may be handled in an efficient manner. However, except for the additional compensation provided for hereinafter for delays in completion of specific unit of work to be performed by Railroad, and except as provided in Public Contracts Code Section 7102, the Contractor shall have no claim for damages, extension of time, or extra compensation in the event its work is held up by railroad train operations or other work performed by Railroad.

The Contractor must understand the Contractor's right to enter Railroad's property is subject to the absolute right of Railroad to cause the Contractor's work on Railroad's property to cease if, in the opinion of Railroad, the Contractor's activities create a hazard to Railroad's property, employees, and operations.

The Contractor acknowledges its receipt from the State a copy of Railroad's form of "Contractor's Right of Entry Agreement". The Contractor agrees to execute and deliver to Railroad the "Contractor's Right of Entry Agreement" and to provide to the State and/or Railroad all insurance policies, binders, certificates or endorsements that are set forth in Exhibit C of the Contractor's Right of Entry Agreement.

### 13-1.02 RAILROAD REQUIREMENTS

The Contractor shall provide to Mr. Freddy Cheung, Manager Industry and Public Projects, 19100 Slover Avenue, Bloomington, CA 92316, Telephone (909) 879-6288, and the Engineer, in writing, the advance notice requirements set forth in Section 1 of Exhibit B of the Contractor's Right of Entry Agreement before performing any work on, or adjacent to the property or tracks of Railroad.

The Contractor shall cooperate with Railroad where work is over or under the tracks, or within the limits of Railroad property to expedite the work and avoid interference with the operation of railroad equipment.

The Contractor shall comply with the rules and regulations of Railroad or the instructions of its representatives in relation to protecting the tracks and property of Railroad and the traffic moving on such tracks, as well as the wires, signals and other property of Railroad, its tenants or licensees, at and in the vicinity of the work during the period of construction. The responsibility of the Contractor for safe conduct and adequate policing and supervision of its work at the job site shall not be lessened or otherwise affected by the presence at the work site of Railroad representatives, or by the Contractor's compliance with any requests or recommendations made by Railroad representatives.

The Contractor shall perform work so as not to endanger or interfere with the safe operation of the tracks and property of Railroad and traffic moving on such tracks, as well as wires, signals and other property of Railroad, its tenants or licensees, at or in the vicinity of the work.

The Contractor shall take protective measures to keep railroad facilities, including track ballast, free of sand or debris resulting from its operations. Damage to railroad facilities resulting from the Contractor's operations will be repaired or replaced by Railroad and the cost of such repairs or replacement shall be deducted from the Contractor's progress and final pay estimates.

The Contractor shall ensure its compliance with the fiber optic protection provisions contained in Section 5 of Exhibit B of the Contractor's Right of Entry Agreement.

The Contractor shall not pile or store any materials nor park any equipment closer than 7.62 meters (25'-0") to the centerline of the nearest track, unless directed by Railroad's representative.

The Contractor shall also abide by the following temporary clearances during the course of construction:

3.66 meters (12'-0") horizontally from centerline of track
6.40 meters (21'-0") vertically above top of rail

The temporary vertical construction clearance above provided will not be permitted until authorized by the Public Utilities Commission. It is anticipated that authorization will be received not later than 15 days after the approval of the contract by the Attorney General. In the event authorization is not received by the time specified, and, if in the opinion of the Engineer, the Contractor's operations are delayed or interfered with by reason of authorization not being received by the said time, the State will compensate the Contractor for such delay to the extent provided in Section 8-1.09, "Right of Way Delays," of the Standard Specifications and not otherwise.

Walkways with railing shall be constructed by the Contractor over open excavation areas when in close proximity of tracks, and railings shall not be closer than 2.60-meters (8'-6") horizontally from centerline of the nearest track, if tangent, or 2.90 meters (9'-6") if curved.

Infringement on the above temporary construction clearances by the Contractor's operations shall be submitted to Railroad by the Engineer, and shall not be undertaken until approved by Railroad, and until the Engineer has obtained any necessary authorization from any governmental body or bodies having jurisdiction thereover. No extension of time or extra compensation will be allowed in the event the Contractor's work is delayed pending Railroad approval and governmental authorization.

When the temporary vertical clearance is less than 6.86 meters (22'-6") above top of rail, Railroad shall have the option of installing tell-tales or other protective devices Railroad deems necessary for protection of Railroad trainmen or rail traffic.

Four sets of plans, in 279mm x 432mm (11" x 17") format, and two sets of calculations showing details of construction affecting Railroad's tracks and property not included in the contract plans, including but not limited to shoring and falsework, shall be submitted to the Engineer for review prior to submittal to Railroad for final approval. Falsework shall comply with Railroad guidelines. Demolition of existing structures shall comply with Railroad guidelines. Shoring shall be designed in accordance with Railroad's shoring requirement of Drawing No. 106613 and guidelines for shoring and falsework, latest edition, issued by Railroad's Office of Chief Engineer. Shoring and falsework plans and calculations shall be prepared and signed by a professional civil engineer registered in the State of California. This work shall not be undertaken until such time as Railroad has given such approval. Review by Railroad may take up to 6 weeks after receipt of all necessary information.

The Contractor shall notify the Engineer in writing, at least 25 calendar days but not more than 40 days in advance of the starting date of installing temporary work with less than permanent clearance at each structure site. The Contractor shall not be permitted to proceed with work across railroad tracks until this requirement has been met. No extension of time or extra compensation will be allowed if the Contractor's work is delayed due to failure to comply with the requirements in this paragraph.

Private crossings at grade over tracks of Railroad for the purpose of hauling earth, rock, paving or other materials will not be permitted. If the Contractor, for the purpose of constructing highway-railway grade separation structures, including construction ramps thereto, desires to move equipment or materials across Railroad's tracks, the Contractor shall first obtain permission from Railroad. Should Railroad approve the crossing, the Contractor shall execute Railroad's form of Contractor's Road Crossing Agreement. By this agreement, the Contractor shall bear the cost of the crossing surface, with warning devices that might be required. The Contractor shall furnish its own employees as flagmen to control movements of vehicles on the private roadway and shall prevent the use of such roadway by unauthorized persons and vehicles.

Blasting will not be permitted.

The Contractor shall, upon completion of the work covered by this contract to be performed by the Contractor upon the premises or over or beneath the tracks of Railroad, promptly remove from the premises of Railroad the Contractor's tools, implements and other materials, whether brought upon said premises by said Contractor or any subcontractor, employee or agent of said Contractor, and cause said premises to be left in a clean and presentable condition.

Under-track pipeline installations shall be constructed in accordance with Railroad's current standards which may be obtained from Railroad. The general guidelines are as follows:

Edges of jacking or boring pit excavations shall be a minimum of 6.10 meters (20 feet) from the centerline of the nearest track.

If the pipe to be installed under the track is 100 mm (4 inches) in diameter or less, the top of the pipe shall be at least 1.067 meters (42 inches) below base of rail.

If the pipe diameter is greater than 100 mm (4 inches) in diameter, it shall be encased and the top of the steel pipe casing shall be at least 1.60 meters (66 inches) below base of rail.

Installation of pipe or conduit under Railroad's tracks shall be done by dry bore and jack method. Hydraulic jacking or boring will not be permitted.

**13-1.03 PROTECTION OF RAILROAD FACILITIES**

Upon the advance notification provided to Railroad as set forth in Section 1 of Exhibit B of the Contractor's Right of Entry Agreement, Railroad representatives, conductors, flagmen or watchmen will be provided by Railroad to protect its facilities, property and movements of its trains or engines. Notice shall be made to Mr. Freddy Cheung of Railroad at telephone (909) 879-6288. At the time of notification, the Contractor shall provide Railroad with a schedule of dates that flagging services will be needed, as well as times, if outside normal working hours. Subsequent deviation from the schedule shall require the advance notice set forth in the Contractor's Right of Entry Agreement:

(a) When any part of any equipment is standing or being operated within 25 feet, measured horizontally, from centerline of any track on which trains may operate, or when any erection or construction activities are in progress within such limits, regardless of elevation above or below track.

(b) For any excavation below elevation of track subgrade if, in the opinion of Railroad's representative, track or other Railroad facilities may be subject to settlement or movement.

(c) During any clearing, grubbing, grading or blasting in proximity to Railroad which, in the opinion of Railroad's representative, may endanger Railroad facilities or operations.

(d) During any of the Contractor's operations when, in the opinion of Railroad's representatives, Railroad facilities, including, but not limited to, tracks, buildings, signals, wire lines or pipe lines, may be endangered.

The cost of flagging and inspection provided by Railroad during the period of constructing that portion of the project located on or near Railroad property, as deemed necessary for the protection of Railroad's facilities and trains, will be borne by the State for a period of 150 working days beginning on the date work commences on or near property of Railroad. The Contractor shall pay to the State liquidated damages in the sum of $500 per day for each day in excess of the above 150 working days the Contractor works on or near Railroad property, and which requires flagging protection of Railroad's facilities and trains.

**13-1.04 WORK BY RAILROAD**

The following work by Railroad will be performed by Railroad forces and is not a part of the work under this contract.

(a) Railroad will perform preliminary engineering and inspection (if any) and flagging as specified in Section 13-1.03, "Protection of Railroad Facilities," of these special provisions.

**13-1.05 DELAYS DUE TO WORK BY RAILROAD**

No delay due to work by Railroad is anticipated.

If delays due to work by Railroad occur, and the Contractor sustains loss which, in the opinion of the Engineer, could not have been avoided by the judicious handling of forces, equipment and plant, the amount of said loss shall be determined as provided in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

If a delay due to work by Railroad occurs, an extension of time determined pursuant to the provisions in Section 8-1.07, "Liquidated Damages," of the Standard Specifications will be granted.

**13-1.06 LEGAL RELATIONS**

The provisions of this section, "Railroad Relations," shall inure directly to the benefit of Railroad.

**CONTRACTOR'S RIGHT OF ENTRY AGREEMENT**

**THIS AGREEMENT** is made and entered into as of the ____ day of _____, 200___, by and between **UNION PACIFIC RAILROAD COMPANY**, a Delaware corporation (the "Railroad"); and _____

*(Name of Contractor)*

a _____ corporation (the "Contractor").
*(State of Incorporation)*

**RECITALS:**

Contractor has been hired by (the) ***State of California, Department of Transportation*** to perform work relating to the reconstruction & widening of the existing SR 60 (Pomona Freeway) overpass (the "work"), with all or a portion of such work to be performed on property of Railroad in the vicinity of Milepost 45.43 on Railroad's Los Angeles Subdivision, which work is the subject of a contract dated _____ between Railroad and (the) State of California, Department of Transportation.

Contractor has requested Railroad to permit it to perform the work on a portion of Railroad's property, and railroad is agreeable thereto, subject to the following terms and conditions.

**AGREEMENT:**

**NOW, THERERFORE**, it is mutually agreed by and between the Railroad and Contractor, as follows:

**ARTICLE 1 - DEFINITION OF CONTRACTOR**

For purposes of this agreement, all references in this agreement to the Contractor shall include the Contractor's subcontractors, officers, agents and employees, and others acting under its or their authority.

**ARTICLE 2 - RIGHT GRANTED; PURPOSE**

The Railroad hereby grants to the Contractor the right, during the term hereinafter stated and upon and subject to each and all of the terms, provisions and conditions herein contained, to enter upon and have ingress to and egress from the property described in the Recitals for the purpose of performing work described in the Recitals above. The right herein granted to Contractor is limited to those portions of the Railroad's property specifically described herein, or designated by the Railroad representative named in Article 4.

**ARTICLE 3 - TERMS AND CONDITIONS CONTAINED IN EXHIBITS A, B, C, AND D**

The terms and conditions contained in **Exhibit A, Exhibit B, Exhibit C** and **Exhibit D** attached hereto, are hereby made a part of this agreement.

**ARTICLE 4 - ALL EXPENSES TO BE BORNE BY CONTRACTOR; RAILROAD REPRESENTATIVE**

A. The Contractor shall bear any and all costs and expenses associated with any work performed by the Contractor, or any costs or expenses incurred by the Railroad relating to this agreement.

B. The Contractor shall coordinate all of its work with the following Railroad representative or his or her duly authorized representative (the "Railroad Representative"):

Carlos Torres
Manager of Track Maintenance
Union Pacific Railroad Company

17225 East Arenth
City Of Industry, CA 91748
Phone: (626) 935-7596
Cell: (213) 709-8369

C. The Contractor, at its own expense, shall adequately police and supervise all work to be performed by the Contractor and shall ensure that such work is performed in a safe manner as set forth in Section 7 of **Exhibit B**. The responsibility of the Contractor for safe conduct and adequate policing and supervision of the Contractor's work shall not be lessened or otherwise affected by the Railroad's approval of plans and specifications involving the work, or by the Railroad's collaboration in performance of any work, or by the presence at the work site of the Railroad Representative, or by compliance by the Contractor with any requests or recommendations made by the Railroad Representative.

**ARTICLE 5 - TERM; TERMINATION**

A. The grant of right herein made to Contractor shall commence on the date of this agreement, and continue until _____, unless sooner terminated as herein provided, or at such time as Contractor has completed its work on Railroad's property, whichever is earlier. Contractor agrees to notify the Railroad Representative in writing when it has completed its work on Railroad property.

B. This agreement may be terminated by either party on ten (10) days written notice to the other party.

**ARTICLE 6 - CERTIFICATE OF INSURANCE**

A. Before commencing any work, Contractor will provide Railroad with the insurance binders, policies, certificates and/or endorsements set forth in **Exhibit C** of this agreement.

B. All insurance correspondence, binders, originals or certificates shall be directed to:

Union Pacific Railroad Company
1800 Farnam Street
Omaha, Nebraska 68102
Attn: Director Contracts
Folder No.: 2074-34

**ARTICLE 7 - DISMISSAL OF CONTRACTOR/SUBCONTRACTOR EMPLOYEE**

At the request of Railroad, Contractor shall remove from Railroad property any employee of Contractor or any subcontractor who fails to conform to the instructions of the Railroad Representative in connection with the Work on Railroad's property, and any right of Contractor shall be suspended until such removal has occurred. Contractor shall indemnify Railroad against any claims arising from the removal of any such employee from Railroad property.

**ARTICLE 8 - ADMINISTRATIVE FEE**

Contractor shall pay to Railroad **FIVE HUNDRED DOLLARS ($500.00)** as reimbursement for clerical, administrative and handling expenses in connection with the processing of this agreement.

**ARTICLE 9 - CROSSINGS**

No additional vehicular crossings (including temporary haul roads) or pedestrian crossings over Railroad's trackage shall be installed or used by Contractor without the prior written permission of Railroad.

**ARTICLE 10 - EXPLOSIVES**

Explosives or other highly flammable substances shall not be stored on Railroad property without the prior written approval of the Railroad.

**IN WITNESS WHEREOF**, the parties hereto have executed this agreement in duplicate as of the date first herein written.

**UNION PACIFIC RAILROAD COMPANY**

By:_____
Manager Contracts

_____
*(Name of Contractor)*

WITNESS:

By: _____

_____

Title: _____

# LOCATION OF EXISTING GRADE SEPARATION RECONSTRUCTION & WIDENING PROJECT

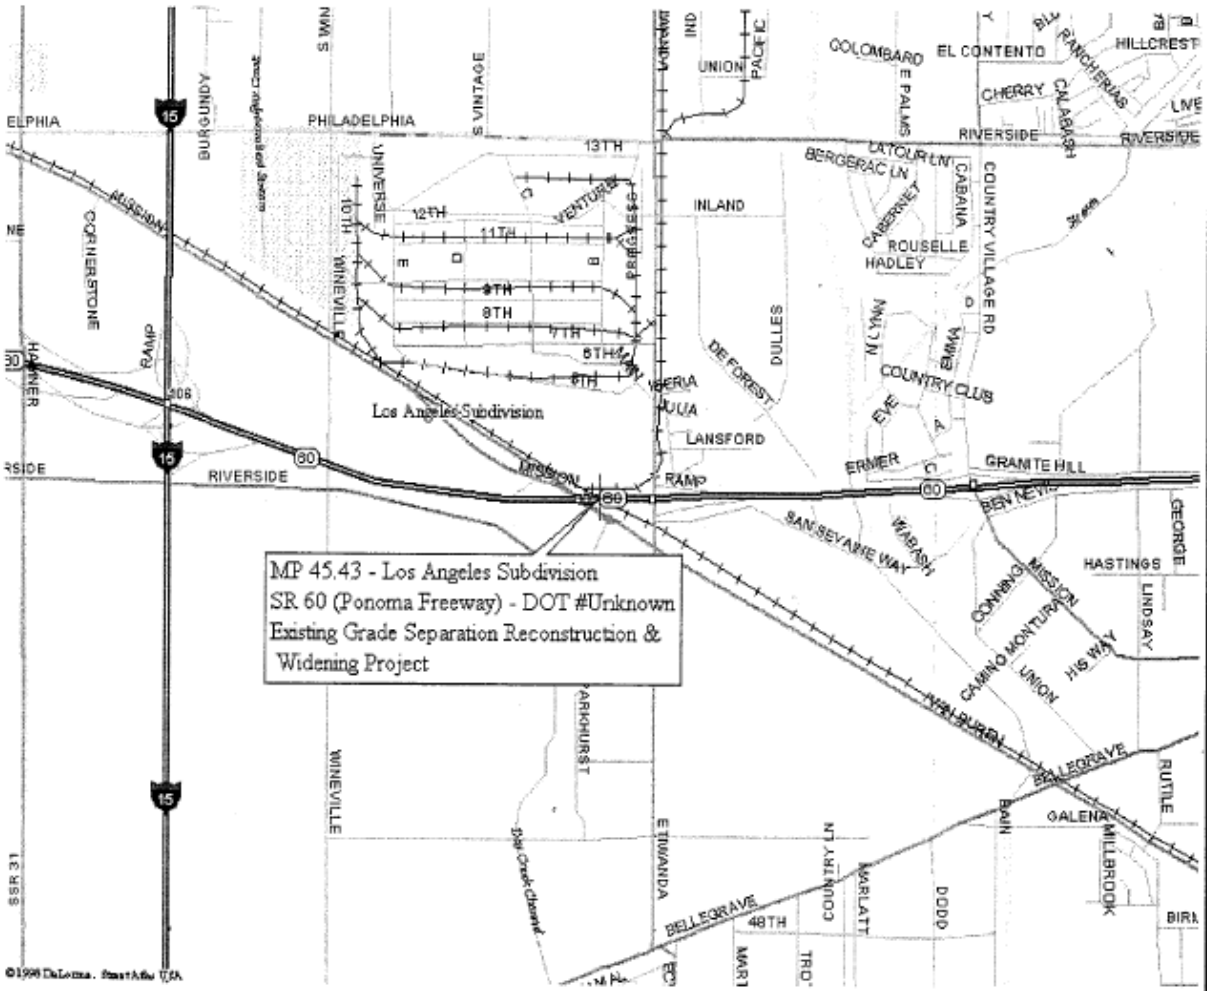


RAILROAD WORK TO BE PERFORMED:

1. Flagging.

**EXHIBIT "A"**

**UNION PACIFIC RAILROAD COMPANY**

LOS ANGELES SUBDIVISION
MILE POST 45.43
GPS: N 34° 01.108', W 117° 31.634'
MIRA LOMA, RIVERSIDE CO., CA.

Illustrative print showing location of existing grade separation reconstruction & widening project with the

**CALIFORNIA DEPARTMENT OF TRANSPORTATION.**

Folder No. 2074-34 Date: May 15, 2002

**WARNING**

IN ALL OCCASIONS, U.P. COMMUNICATIONS DEPARTMENT MUST BE CONTACTED IN ADVANCE OF ANY WORK TO DETERMINE EXISTENCE AND LOCATION OF FIBER OPTIC CABLE. PHONE: 1-(800) 336-9193

EXHIBIT B

TO CONTRACTOR'S RIGHT OF ENTRY AGREEMENT

Section 1. NOTICE OF COMMENCEMENT OF WORK - FLAGGING

The Contractor agrees to notify the Railroad Representative at least ten (10) working days in advance of Contractor commencing its work and at least ten (10) working days in advance of proposed performance of any work by the Contractor in which any person or equipment will be within twenty-five (25) feet of any track, or will be near enough to any track that any equipment extension (such as, but not limited to, a crane boom) will reach to within twenty-five (25) feet of any track. No work of any kind shall be performed, and no person, equipment, machinery, tool(s), material(s), vehicle(s), or thing(s) shall be located, operated, placed, or stored within twenty-five (25) feet of any of Railroad's track(s) at any time, for any reason, unless and until a Railroad flagman is provided to watch for trains. Upon receipt of such ten (10)-day notice, the Railroad Representative will determine and inform the Contractor whether a flagman need be present and whether the Contractor need implement any special protective or safety measures. If flagging or other special protective or safety measures are performed by the Railroad, such services will be provided at State's expense.

Section 2. LIMITATION AND SUBORDINATION OF RIGHTS GRANTED

A. The foregoing grant of right is subject and subordinate to the prior and continuing right and obligation of the Railroad to use and maintain its entire property including the right and power of the Railroad to construct, maintain, repair, renew, use, operate, change, modify or relocate railroad tracks, roadways, signal, communication, fiber optics, or other wirelines, pipelines and other facilities upon, along or across any or all parts of its property, all or any of which may be freely done at any time or times by the Railroad without liability to the Contractor or to any other party for compensation or damages.

B. The foregoing grant is also subject to all outstanding superior rights (including those in favor of licensees and lessees of the Railroad's property, and others) and the right of the Railroad to renew and extend the same, and is made without covenant of title or for quiet enjoyment.

Section 3. NO INTERFERENCE WITH OPERATIONS OF RAILROAD AND ITS TENANTS.

A. The Contractor shall conduct its operations so as not to interfere with the continuous and uninterrupted use and operation of the railroad tracks and property of the Railroad, including without limitation, the operations of the Railroad's lessees, licensees or others, unless specifically authorized in advance by the Railroad Representative. Nothing shall be done or permitted to be done by the Contractor at any time that would in any manner impair the safety of such operations. When not in use, Contractor's machinery and materials shall be kept at least fifty (50) feet from the centerline of the Railroad's nearest track, and there shall be no vehicular crossings of Railroads tracks except at existing open public crossings.

B. Operations of the Railroad and work performed by the Railroad personnel and delays in the work to be performed by the Contractor caused by such railroad operations and work are expected by the Contractor, and Contractor agrees that the Railroad shall have no liability to Contractor, its subcontractors or any other person or entity for any such delays. The Contractor shall coordinate its activities with those of the Railroad and third parties so as to avoid interference with railroad operations. The safe operation of the Railroad takes precedence over any work to be performed by the Contractor.

Section 4. LIENS.

The Contractor shall pay in full all persons who perform labor or provide materials for the work to be performed by Contractor. The Contractor shall not create, permit or suffer any mechanic's or materialmen's liens of any kind or nature to be created or enforced against any property of the Railroad for any such work performed. The Contractor shall indemnify and hold harmless the Railroad from and against any and all liens, claims, demands, costs or expenses of whatsoever nature in any way connected with or growing out of such work done, labor performed, or materials furnished. If the Contractor fails to promptly cause any lien to be released of record, the Railroad may, at its election, discharge the lien or claim of lien at Contractor's expense.

Section 5. PROTECTION OF FIBER OPTIC CABLE SYSTEMS.

A. Fiber optic cable systems may be buried on the Railroad's property. Protection of the fiber optic cable systems is of extreme importance since any break could disrupt service to users resulting in business interruption and loss of revenue and profits. Contractor shall telephone the Railroad during normal business hours (7:00 a.m. to 9:00 p.m. Central Time, Monday through Friday, except holidays) at 1-800-336-9193 (also a 24-hour, 7-day number for emergency calls) to determine if fiber optic cable is buried anywhere on the Railroad's premises to be used by the Contractor. If it is, Contractor will telephone the telecommunications company(ies) involved, make arrangements for a cable locator and, if applicable, for relocation or other protection of the fiber optic cable. The Contractor shall not commence any work until all such protection or relocation (if applicable) has been accomplished.

B. In addition to other indemnity provisions in this Agreement, the Contractor shall, pursuant to Cal. Gov. Code Section 14662.5, indemnify, defend and hold the Railroad harmless from and against all costs, liability and expense whatsoever (including, without limitation, attorneys' fees, court costs and expenses) arising out of any act or omission of the Contractor, its subcontractors, agents and/or employees, that causes or contributes to (1) any damage to or destruction of any telecommunications system on Railroad's property, and/or (2) any injury to or death of any person employed by or on behalf of any telecommunications company, and/or its Contractor, agents and/or employees, on Railroad's property. Contractor shall not have or seek recourse against Railroad for any claim or cause of action for alleged loss of profits or revenue or loss of service or other consequential damage to a telecommunication company using Railroad's property or a customer or user of services of the fiber optic cable on Railroad's property.

Section 6. PERMITS - COMPLIANCE WITH LAWS.

In the prosecution of the work covered by this agreement, the Contractor shall secure any and all necessary permits and shall comply with all applicable federal, state and local laws, regulations and enactment's affecting the work including, without limitation, all applicable Federal Railroad Administration regulations.

Section 7. SAFETY.

A. Safety of personnel, property, rail operations and the public is of paramount importance in the prosecution of the work performed by the Contractor. The Contractor shall be responsible for initiating, maintaining and supervising all safety operations and programs in connection with the work. The Contractor shall at a minimum comply with the Railroad's safety standards listed in Exhibit D, hereto attached, to ensure uniformity with the safety standards followed by the Railroad's own forces. As a part of the Contractor's safety responsibilities, the Contractor shall notify the Railroad if the Contractor determines that any of the Railroad's safety standards are contrary to good safety practices. The Contractor shall furnish copies of Exhibit D to each of its employees before they enter on the job site.

B. Without limitation of the provisions of paragraph A above, the Contractor shall keep the job site free from safety and health hazards and ensure that its employees are competent and adequately trained in all safety and health aspects of the job.

C. The Contractor shall have proper first aid supplies available on the job site so that prompt first aid services may be provided to any person injured on the job site. The Contractor shall promptly notify the Railroad of any U.S. Occupational Safety and Health Administration reportable injuries. The Contractor shall have a nondelegable duty to control its employees while they are on the job site or any other property of the Railroad, and to be certain they do not use, be under the influence of, or have in their possession any alcoholic beverage, drug or other substance that may inhibit the safe performance of any work.

D. If and when requested by the Railroad, the Contractor shall deliver to the Railroad a copy of the Contractor's safety plan for conducting the work (the "Safety Plan"). Railroad shall have the right, but not the obligation, to require the Contractor to correct any deficiencies in the Safety Plan. The terms of this agreement shall control if there are any inconsistencies between this agreement and the Safety Plan.

Section 8. INDEMNITY.

A. Pursuant to Cal. Gov. Code, Section 14662.5, the Contractor shall indemnify, defend and hold harmless the Railroad, its affiliates, and its and their officers, agents and employees ("Indemnified Parties") from and against any and all loss, damage, injury, liability, claim, demand, cost or expense (including, without limitation, attorney's, consultant's and expert's fees, and court costs), fine or penalty (collectively, "Loss") incurred by any person (including, without limitation, any Indemnified Party, the Contractor, or any employee of the Contractor or of any Indemnified Party) arising out of or in any

manner connected with (i) any work performed by the Contractor, or (ii) any act or omission of the Contractor, its officers, agents or employees, or (iii) any breach of this agreement by the Contractor.

B. The right to indemnity under this Section 8 shall accrue upon occurrence of the event giving rise to the Loss, and shall apply regardless of any negligence or strict liability of any Indemnified Party, except where the Loss is caused by the sole active negligence of an Indemnified Party as established by the final judgment of a court of competent jurisdiction. The sole active negligence of any Indemnified Party shall not bar the recovery of any other Indemnified Party.

C. The Contractor expressly and specifically assumes potential liability under this Section 8 for claims or actions brought by the Contractor's own employees. The Contractor waives any immunity it may have under worker's compensation or industrial insurance acts to indemnify the Railroad under this Section 8. Contractor acknowledges that this waiver was mutually negotiated by the parties hereto.

D. No court or jury findings in any employee's suit pursuant to any worker's compensation act or the Federal Employers' Liability Act against a party to this agreement may be relied upon or used by the Contractor in any attempt to assert liability against the Railroad.

E. The provisions of this Section 8 shall survive the completion of any work performed by the Contractor or the termination or expiration of this agreement. In no event shall this Section 8 or any other provision of this agreement be deemed to limit any liability the Contractor may have to any Indemnified Party by statute or under common law.

Section 9. RESTORATION OF PROPERTY.

In the event the Railroad authorizes the Contractor to take down any fence of the Railroad or in any manner move or disturb any of the other property of the Railroad in connection with the work to be performed by Contractor, then in that event the Contractor shall, as soon as possible and at Contractor's sole expense, restore such fence and other property to the same condition as the same were in before such fence was taken down or such other property was moved or disturbed. The Contractor shall remove all of Contractor's tools, equipment, rubbish and other materials from Railroad's property promptly upon completion of the work, restoring Railroad's property to the same state and condition as when Contractor entered thereon.

Section 10. WAIVER OF DEFAULT.

Waiver by the Railroad of any breach or default of any condition, covenant or agreement herein contained to be kept, observed and performed by the Contractor shall in no way impair the right of the Railroad to avail itself of any remedy for any subsequent breach or default.

Section 11. MODIFICATION - ENTIRE AGREEMENT.

No modification of this agreement shall be effective unless made in writing and signed by the Contractor and the Railroad. This agreement and the exhibits attached hereto and made a part hereof constitute the entire understanding between the Contractor and the Railroad and cancel and supersede any prior negotiations, understandings or agreements, whether written or oral, with respect to the work to be performed by the Contractor.

Section 12. ASSIGNMENT - SUBCONTRACTING.

The Contractor shall not assign or subcontract this agreement, or any interest therein, without the written consent of the Railroad. The Contractor shall be responsible for the acts and omissions of all subcontractors, and shall require all subcontractors to maintain the insurance coverage required to be maintained by the Contractor as provided in this agreement, and to indemnify the Contractor and the Railroad to the same extent as the Railroad is indemnified by the Contractor under this agreement.

EXHIBIT C

TO CONTRACTOR'S RIGHT OF ENTRY AGREEMENT

Union Pacific Railroad Company
Insurance Provisions For
Contractor's Right of Entry Agreement

Contractor shall, at its sole cost and expense, procure and maintain during the life of this Agreement the following insurance coverage:

A. Commercial General Liability insurance. This insurance shall contain broad form contractual liability with a single limit of at least $5,000,000 each occurrence or claim and an aggregate limit of at least $10,000,000. Coverage must be purchased on a post 1998 ISO or equivalent form, including but not limited to coverage for the following:

- Bodily injury including death and personal injury
- Property damage
- Fire legal liability (Not less than the replacement value of the portion of the premises occupied)
- Products and completed operations

The policy shall also contain the following endorsements which shall be indicated on the certificate of insurance:

- "For purposes of this insurance, Union Pacific Railroad payments related to the Federal Employers Liability Act or a Union Pacific Wage Continuation Program or similar programs are deemed not to be either payments made or obligations assumed under any Workers Compensation, disability benefits, or unemployment compensation law or similar law."
- The exclusions for railroads (except where the Job site is more than fifty feet (50') from any railroad including but not limited to tracks, bridges, trestles, roadbeds, terminals, underpasses or crossings), and explosion, collapse and underground hazard shall be removed.
- Coverage for Contractor's (and Railroad's) employees shall not be excluded
- Waiver of subrogation

B. Business Automobile Coverage insurance. This insurance shall contain a combined single limit of at least $5,000,000 per occurrence or claim, including but not limited to coverage for the following:

- Bodily injury and property damage
- Any and all motor vehicles including owned, hired and non-owned

The policy shall also contain the following endorsements which shall be indicated on the certificate of insurance:

- "For purposes of this insurance, Union Pacific Railroad payments related to the Federal Employers Liability Act or a Union Pacific Wage Continuation Program or similar programs are deemed not to be either payments made or obligations assumed under any Workers Compensation, disability benefits, or unemployment compensation law or similar law."
- The exclusions for railroads (except where the Job site is more than fifty feet (50') from any railroad including but not limited to tracks, bridges, trestles, roadbeds, terminals, underpasses or crossings), and explosion, collapse and underground hazard shall be removed.
- Motor Carrier Act Endorsement- Hazardous materials clean up (MCS-90) if required by law.

C. Workers Compensation and Employers Liability insurance including but not limited to:

- Contractor's statutory liability under the workers' compensation laws of the state(s) affected by this Agreement
- Employers' Liability (Part B) with limits of at least
  $500,000 each accident, $500,000 disease policy limit
  $500,000 each employee

If Workers Compensation insurance will not cover the liability of Contractor in states that require participation in state workers' compensation fund, Contractor shall comply with the laws of such states. If Contractor is self-insured, evidence of state approval must be provided along with evidence of excess workers compensation coverage.

Coverage shall include liability arising out of the U. S. Longshoremen's and Harbor Workers' Act, the Jones Act, and the Outer Continental Shelf Land Act, if applicable.

The policy shall also contain the following endorsement which shall be indicated on the certificate of insurance:

- Alternate Employer Endorsement

D. Umbrella or Excess Policies In the event Contractor utilizes Umbrella or excess policies, these policies shall "follow form" and afford no less coverage than the primary policy.

E. Railroad Protective Liability insurance naming only the Railroad as the insured with a combined single limit of $2,000,000 per occurrence with a $6,000,000 aggregate. The policy shall be broad form coverage for "Physical Damage to Property" (ISO Form CG 00 35 07 98 or equivalent). A binder stating the policy is in place must be submitted to the Railroad until the original policy is forwarded to the Railroad.

F. Punitive damage exclusion must be deleted, which deletion shall be indicated on the certificate of insurance.

G. Contractor agrees to waive its right of recovery, and its insurers, through policy endorsement, agree to waive their right of subrogation against Railroad. Contractor further waives its right of recovery, and its insurers also waive their right of subrogation against Railroad for loss of its owned or leased property or property under its care, custody and control. Contractor's insurance shall be primary with respect to any insurance carried by Railroad. All waivers of subrogation shall be indicated on the certificate of insurance.

H. All policy(ies) required above (excluding Workers Compensation) shall provide severability of interests and shall name Railroad as an additional insured. Severability of interest and naming Railroad as additional insured shall be indicated on the certificate of insurance.

I. Prior to commencing the Work, Contractor shall furnish to Railroad original certificate(s) of insurance evidencing the required coverage, endorsements, and amendments. The certificate(s) shall contain a provision that obligates the insurance company(ies) issuing such policy(ies) to notify Railroad in writing of any cancellation or material alteration. Upon request from Railroad, a certified duplicate original of any required policy shall be furnished.

J. Any insurance policy shall be written by a reputable insurance company acceptable to Railroad or with a current Best's Insurance Guide Rating of A- and Class VII or better, and authorized to do business in the state(s) in which the service is to be provided.

K. Contractor WARRANTS that this Agreement has been thoroughly reviewed by Contractor's insurance agent(s)/broker(s), who have been instructed by Contractor to procure the insurance coverage required by this Agreement and acknowledges that Contractor's insurance coverage will be primary.

L. The fact that insurance is obtained by Contractor or Railroad on behalf of Contractor shall not be deemed to release or diminish the liability of Contractor, including, without limitation, liability under the indemnity provisions of this Agreement. Damages recoverable by Railroad shall not be limited by the amount of the required insurance coverage.

EXHIBIT D

TO CONTRACTOR'S RIGHT OF ENTRY AGREEMENT

MINIMUM SAFETY REQUIREMENTS

The term "employees" as used herein refer to all employees of the Contractor as well as all employees of any subcontractor or agent of the Contractor.

I. Clothing

A. All employees of the Contractor will be suitably dressed to perform their duties safely and in a manner that will not interfere with their vision, hearing, or free use of their hands or feet.

Specifically, the Contractor's employees must wear:

(i) Waist-length shirts with sleeves.
(ii) Trousers that cover the entire leg. If flare-legged trousers are worn, the trouser bottoms must be tied to prevent catching.
(iii) Footwear that covers their ankles and has a defined heel. Employees working on bridges are required to wear safety-toed footwear that conforms to the American National Standards Institute (ANSI) and FRA footwear requirements.

B. Employees shall not wear boots (other than work boots), sandals, canvas-type shoes, or other shoes that have thin soles or heels that are higher than normal.

C. Employees must not wear loose or ragged clothing, neckties, finger rings, or other loose jewelry while operating or working on machinery.

II. Personal Protective Equipment

The Contractor shall require its employees to wear personal protective equipment as specified by Railroad rules, regulations, or recommended or requested by the Railroad Representative.

(i) Hard hat that meets the American National Standard (ANSI) Z89.1 – latest revision. Hard hats should be affixed with the Contractor's or subcontractor's company logo or name.
(ii) Eye protection that meets American National Standard (ANSI) for occupational and educational eye and face protection, Z87.1 – latest revision. Additional eye protection must be provided to meet specific job situations such as welding, grinding, etc.
(iii) Hearing protection, which affords enough attenuation to give protection from noise levels that will be occurring on the job site. Hearing protection, in the form of plugs or muffs, must be worn when employees are within:

- 100 feet of a locomotive or roadway/work equipment
- 15 feet of power operated tools
- 150 feet of jet blowers or pile drivers
- 150 feet of retarders in use (when within 10 feet, employees must wear dual ear protection – plugs and muffs)
-

(iv) Other types of personal protective equipment, such as respirators, fall protection equipment, and face shields, must be worn as recommended or requested by the Railroad Representative.

III. On Track Safety

The Contractor is responsible for compliance with the Federal Railroad Administration's Roadway Worker Protection regulations – 49CFR214, Subpart C and Railroad's On-Track Safety rules. Under 49CFR214, Subpart C, the Contractor is responsible for the training of their employees on such regulations. In addition to the instructions contained in Roadway Worker Protection regulations, all employees must:

(i) Maintain a distance of twenty-five (25) feet to any track unless the Railroad Representative is present to authorize movements.
(ii) Wear an orange, reflectorized workwear approved by the Railroad Representative.
(iii) Participate in a job briefing that will specify the type of On-Track Safety for the type of work being performed. The Contractor must take special note of limits of track authority, which tracks may or may not be fouled, and clearing the track. The Contractors will also receive special instructions relating to the work zone around machines and minimum distances between machines while working or traveling.

IV. Equipment

A. It is the responsibility of the Contractor to ensure that all equipment is in a safe condition to operate. If, in the opinion of the Railroad Representative, any of the Contractor's equipment is unsafe for use, the Contractor shall remove such equipment from the Railroad's property. In addition, the Contractor must ensure that the operators of all equipment are properly trained and competent in the safe operation of the equipment. In addition, operators must be:

- Familiar and comply with Railroad's rules on lockout/tagout of equipment.
- Trained in and comply with the applicable operating rules if operating any hy-rail equipment on-track.
- Trained in and comply with the applicable air brake rules if operating any equipment that moves rail cars or any other railbound equipment.

B. All self-propelled equipment must be equipped with a first-aid kit, fire extinguisher, and audible back-up warning device.

C. Unless otherwise authorized by the Railroad Representative, all equipment must be parked a minimum of twenty-five (25) feet from any track. Before leaving any equipment unattended, the operator must stop the engine and properly secure the equipment against movement.

D. Cranes must be equipped with three orange cones that will be used to mark the working area of the crane and the minimum clearances to overhead powerlines.

V. General Safety Requirements

A. The Contractor shall ensure that all waste is properly disposed of in accordance with applicable federal and state regulations.

B. The Contractor shall ensure that all employees participate in and comply with a job briefing conducted by the Railroad Representative, if applicable. During this briefing, the Railroad Representative will specify safe work procedures, (including On-Track Safety) and the potential hazards of the job. If any employee has any questions or concerns about the work, the employee must voice them during the job briefing. Additional job briefings will be conducted during the work as conditions, work procedures, or personnel change.

C. All track work performed by the Contractor meets the minimum safety requirements established by the Federal Railroad Administration's Track Safety Standards 49CFR213.

D. All employees comply with the following safety procedures when working around any railroad track:

(i) Always be on the alert for moving equipment. Employees must always expect movement on any track, at any time, in either direction.
(ii) Do not step or walk on the top of the rail, frog, switches, guard rails, or other track components.
(iii) In passing around the ends of standing cars, engines, roadway machines or work equipment, leave at least 20 feet between yourself and the end of the equipment. Do not go between pieces of equipment of the opening is less than one car length (50 feet).

(iv) Avoid walking or standing on a track unless so authorized by the employee in charge.
(v) Before stepping over or crossing tracks, look in both directions first.
(vi) Do not sit on, lie under, or cross between cars except as required in the performance of your duties and only when track and equipment have been protected against movement.

E. All employees must comply with all federal and state regulations concerning workplace safety.

## SECTION 14 FEDERAL REQUIREMENTS FOR FEDERAL-AID CONSTRUCTION PROJECTS

**GENERAL**.—The work herein proposed will be financed in whole or in part with Federal funds, and therefore all of the statutes, rules and regulations promulgated by the Federal Government and applicable to work financed in whole or in part with Federal funds will apply to such work. The "Required Contract Provisions, Federal-Aid Construction Contracts, "Form FHWA 1273, are included in this Section 14. Whenever in said required contract provisions references are made to "SHA contracting officer," "SHA resident engineer," or "authorized representative of the SHA," such references shall be construed to mean "Engineer" as defined in Section 1-1.18 of the Standard Specifications.

**PERFORMANCE OF PREVIOUS CONTRACT**.—In addition to the provisions in Section II, "Nondiscrimination," and Section VII, "Subletting or Assigning the Contract," of the required contract provisions, the Contractor shall comply with the following:

The bidder shall execute the CERTIFICATION WITH REGARD TO THE PERFORMANCE OF PREVIOUS CONTRACTS OR SUBCONTRACTS SUBJECT TO THE EQUAL OPPORTUNITY CLAUSE AND THE FILING OF REQUIRED REPORTS located in the proposal. No request for subletting or assigning any portion of the contract in excess of $10,000 will be considered under the provisions of Section VII of the required contract provisions unless such request is accompanied by the CERTIFICATION referred to above, executed by the proposed subcontractor.

**NON-COLLUSION PROVISION**.—The provisions in this section are applicable to all contracts except contracts for Federal Aid Secondary projects.

Title 23, United States Code, Section 112, requires as a condition precedent to approval by the Federal Highway Administrator of the contract for this work that each bidder file a sworn statement executed by, or on behalf of, the person, firm, association, or corporation to whom such contract is to be awarded, certifying that such person, firm, association, or corporation has not, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action in restraint of free competitive bidding in connection with the submitted bid. A form to make the non-collusion affidavit statement required by Section 112 as a certification under penalty of perjury rather than as a sworn statement as permitted by 28, USC, Sec. 1746, is included in the proposal.

**PARTICIPATION BY MINORITY BUSINESS ENTERPRISES IN SUBCONTRACTING**.—Part 23, Title 49, Code of Federal Regulations applies to this Federal-aid project. Pertinent sections of said Code are incorporated in part or in its entirety within other sections of these special provisions.

Schedule B—Information for Determining Joint Venture Eligibility

(This form need not be filled in if all joint venture firms are minority owned.)

1. Name of joint venture _____
2. Address of joint venture _____
3. Phone number of joint venture _____
4. Identify the firms which comprise the joint venture. (The MBE partner must complete Schedule A.) _____
   _____

   a. Describe the role of the MBE firm in the joint venture. _____
      _____
   b. Describe very briefly the experience and business qualifications of each non-MBE joint venturer: _____
      _____

5. Nature of the joint venture's business _____
   _____
6. Provide a copy of the joint venture agreement.
7. What is the claimed percentage of MBE ownership? _____
8. Ownership of joint venture: (This need not be filled in if described in the joint venture agreement, provided by question 6.).

   a. Profit and loss sharing.
   b. Capital contributions, including equipment.
   c. Other applicable ownership interests.

9. Control of and participation in this contract. Identify by name, race, sex, and "firm" those individuals (and their titles) who are responsible for day-to-day management and policy decision making, including, but not limited to, those with prime responsibility for:

   a. Financial decisions _____
   b. Management decisions, such as:

      (1) Estimating _____
      (2) Marketing and sales _____
      (3) Hiring and firing of management personnel _____
      _____
      (4) Purchasing of major items or supplies _____
      _____

   c. Supervision of field operations _____

Note.—If, after filing this Schedule B and before the completion of the joint venture's work on the contract covered by this regulation, there is any significant change in the information submitted, the joint venture must inform the grantee, either directly or through the prime contractor if the joint venture is a subcontractor.

**Affidavit**

"The undersigned swear that the foregoing statements are correct and include all material information necessary to identify and explain the terms and operation of our joint venture and the intended participation by each joint venturer in the undertaking. Further, the undersigned covenant and agree to provide to grantee current, complete and accurate information regarding actual joint venture work and the payment therefor and any proposed changes in any of the joint venture arrangements and to permit the audit and examination of the books, records and files of the joint venture, or those of each joint venturer relevant to the joint venture, by authorized representatives of the grantee or the Federal funding agency. Any material misrepresentation will be grounds for terminating any contract which may be awarded and for initiating action under Federal or State laws concerning false statements."

| | |
|---|---|
| Name of Firm | Name of Firm |
| Signature | Signature |
| Name | Name |
| Title | Title |
| Date | Date |

Date _____

State of _____

County of _____

On this ____ day of _____, 20___, before me appeared (Name) _____, to me personally known, who, being duly sworn, did execute the foregoing affidavit, and did state that he or she was properly authorized by (Name of firm) _____ to execute the affidavit and did so as his or her free act and deed.

Notary Public _____

Commission expires _____

[Seal]

Date _____

State of _____

County of _____

On this ___ day of _____, 20___, before me appeared (Name) _____ to me personally known, who, being duly sworn, did execute the foregoing affidavit, and did state that he or she was properly authorized by (Name of firm) _____ to execute the affidavit and did so as his or her free act and deed.

Notary Public _____

Commission expires _____

[Seal]

## REQUIRED CONTRACT PROVISIONS
## FEDERAL-AID CONSTRUCTION CONTRACTS

### I. GENERAL

1. These contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.

2. Except as otherwise provided for in each section, the contractor shall insert in each subcontract all of the stipulations contained in these Required Contract Provisions, and further require their inclusion in any lower tier subcontract or purchase order that may in turn be made. The Required Contract Provisions shall not be incorporated by reference in any case. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with these Required Contract Provisions.

3. A breach of any of the stipulations contained in these Required Contract Provisions shall be sufficient grounds for termination of the contract.

4. A breach of the following clauses of the Required Contract Provisions may also be grounds for debarment as provided in 29 CFR 5.12:

   Section I, paragraph 2;
   Section IV, paragraphs 1, 2, 3, 4, and 7;
   Section V, paragraphs 1 and 2a through 2g.

5. Disputes arising out of the labor standards provisions of Section IV (except paragraph 5) and Section V of these Required Contract Provisions shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the U.S. Department of Labor (DOL) as set forth in 29 CFR 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the DOL, or the contractor's employees or their representatives.

6. Selection of Labor - During the performance of this contract, the contractor shall not:

   a. discriminate against labor from any other State, possession, or territory of the United States (except for employment preference for Appalachian contracts, when applicable, as specified in Attachment A), or

   b. employ convict labor for any purpose within the limits of the project unless it is labor performed by convicts who are on parole, supervised release, or probation.

### II. NONDISCRIMINATION

(Applicable to all Federal-aid construction contracts and to all related subcontracts of $10,000 or more.)

1. **Equal Employment Opportunity:** Equal employment opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (28 CFR 35, 29 CFR 1630, and 41 CFR 60) and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140 shall constitute the EEO and specific affirmative action standards for the contractor's project activities under this contract. The Equal Opportunity Construction Contract Specifications set forth under 41 CFR 60-4.3 and the provisions of the American Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR 35 and 29 CFR 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:

   a. The contractor will work with the State highway agency (SHA) and the Federal Government in carrying out EEO obligations and in their review of his/her activities under the contract.

   b. The contractor will accept as his operating policy the following statement:

      "It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, color, national origin, age or disability. Such action

shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, preapprenticeship, and/or on-the-job training."

2. **EEO Officer:** The contractor will designate and make known to the SHA contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active contractor program of EEO and who must be assigned adequate authority and responsibility to do so.

3. **Dissemination of Policy:** All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:

   a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer.

   b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.

   c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minority group employees.

   d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.

   e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.

4. **Recruitment:** When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minority groups in the area from which the project work force would normally be derived.

   a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minority group applicants. To meet this requirement, the contractor will identify sources of potential minority group employees, and establish with such identified sources procedures whereby minority group applicants may be referred to the contractor for employment consideration.

   b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, he is expected to observe the provisions of that agreement to the extent that the system permits the contractor's compliance with EEO contract provisions. (The DOL has held that where implementation of such agreements have the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Executive Order 11246, as amended.)

   c. The contractor will encourage his present employees to refer minority group applicants for employment. Information and procedures with regard to referring minority group applicants will be discussed with employees.

5. **Personnel Actions:** Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, national origin, age or disability. The following procedures shall be followed:

   a. The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.

b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.

c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.

d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with his obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of his avenues of appeal.

6. **Training and Promotion:**

a. The contractor will assist in locating, qualifying, and increasing the skills of minority group and women employees, and applicants for employment.

b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship, and on-the-job training programs for the geographical area of contract performance. Where feasible, 25 percent of apprentices or trainees in each occupation shall be in their first year of apprenticeship or training. In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision.

c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.

d. The contractor will periodically review the training and promotion potential of minority group and women employees and will encourage eligible employees to apply for such training and promotion.

7. **Unions:** If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use his/her best efforts to obtain the cooperation of such unions to increase opportunities for minority groups and women within the unions, and to effect referrals by such unions of minority and female employees. Actions by the contractor either directly or through a contractor's association acting as agent will include the procedures set forth below:

a. The contractor will use best efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minority group members and women for membership in the unions and increasing the skills of minority group employees and women so that they may qualify for higher paying employment.

b. The contractor will use best efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, national origin, age or disability.

c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the SHA and shall set forth what efforts have been made to obtain such information.

d. In the event the union is unable to provide the contractor with a reasonable flow of minority and women referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, national origin, age or disability; making full efforts to obtain qualified and/or qualifiable minority group persons and women. (The DOL has held that it shall be no excuse that the union with which the contractor has a collective bargaining agreement providing for exclusive referral failed to refer minority employees.) In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the SHA.

8. **Selection of Subcontractors, Procurement of Materials and Leasing of Equipment:** The contractor shall not discriminate on the grounds of race, color, religion, sex, national origin, age or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment.

   a. The contractor shall notify all potential subcontractors and suppliers of his/her EEO obligations under this contract.

   b. Disadvantaged business enterprises (DBE), as defined in 49 CFR 23, shall have equal opportunity to compete for and perform subcontracts which the contractor enters into pursuant to this contract. The contractor will use his best efforts to solicit bids from and to utilize DBE subcontractors or subcontractors with meaningful minority group and female representation among their employees. Contractors shall obtain lists of DBE construction firms from SHA personnel.

   c. The contractor will use his best efforts to ensure subcontractor compliance with their EEO obligations.

9. **Records and Reports:** The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following completion of the contract work and shall be available at reasonable times and places for inspection by authorized representatives of the SHA and the FHWA.

   a. The records kept by the contractor shall document the following:

      (1) The number of minority and non-minority group members and women employed in each work classification on the project;

      (2) The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women;

      (3) The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minority and female employees; and

      (4) The progress and efforts being made in securing the services of DBE subcontractors or subcontractors with meaningful minority and female representation among their employees.

   b. The contractors will submit an annual report to the SHA each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on Form FHWA-1391. If on-the-job training is being required by special provision, the contractor will be required to collect and report training data.

## III. NONSEGREGATED FACILITIES

(Applicable to all Federal-aid construction contracts and to all related subcontracts of $10,000 or more.)

a. By submission of this bid, the execution of this contract or subcontract, or the consummation of this material supply agreement or purchase order, as appropriate, the bidder, Federal-aid construction contractor, subcontractor, material supplier, or vendor, as appropriate, certifies that the firm does not maintain or provide for its employees any segregated facilities at any of its establishments, and that the firm does not permit its employees to perform their services at any location, under its control, where segregated facilities are maintained. The firm agrees that a breach of this certification is a violation of the EEO provisions of this contract. The firm further certifies that no employee will be denied access to adequate facilities on the basis of sex or disability.

b. As used in this certification, the term "segregated facilities" means any waiting rooms, work areas, restrooms and washrooms, restaurants and other eating areas, time clocks, locker rooms, and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing facilities provided for employees which are segregated by explicit directive, or are, in fact, segregated on the basis of race, color, religion, national origin, age or disability, because of habit, local custom, or otherwise. The only exception will be for the disabled when the demands for accessibility override (e.g. disabled parking).

c. The contractor agrees that it has obtained or will obtain identical certification from proposed subcontractors or material suppliers prior to award of subcontracts or consummation of material supply agreements of $10,000 or more and that it will retain such certifications in its files.

## IV. PAYMENT OF PREDETERMINED MINIMUM WAGE

(Applicable to all Federal-aid construction contracts exceeding $2,000 and to all related subcontracts, except for projects located on roadways classified as local roads or rural minor collectors, which are exempt.)

1. **General:**

a. All mechanics and laborers employed or working upon the site of the work will be paid unconditionally and not less often than once a week and without subsequent deduction or rebate on any account [except such payroll deductions as are permitted by regulations (29 CFR 3)] issued by the Secretary of Labor under the Copeland Act (40 U.S.C. 276c) the full amounts of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment. The payment shall be computed at wage rates not less than those contained in the wage determination of the Secretary of Labor (hereinafter "the wage determination") which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor or its subcontractors and such laborers and mechanics. The wage determination (including any additional classifications and wage rates conformed under paragraph 2 of this Section IV and the DOL poster (WH-1321) or Form FHWA-1495) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers. For the purpose of this Section, contributions made or costs reasonably anticipated for bona fide fringe benefits under Section 1(b)(2) of the Davis-Bacon Act (40 U.S.C. 276a) on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of Section IV, paragraph 3b, hereof. Also, for the purpose of this Section, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs, which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in paragraphs 4 and 5 of this Section IV.

b. Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein, provided, that the employer's payroll records accurately set forth the time spent in each classification in which work is performed.

c. All rulings and interpretations of the Davis-Bacon Act and related acts contained in 29 CFR 1, 3, and 5 are herein incorporated by reference in this contract.

2. **Classification:**

a. The SHA contracting officer shall require that any class of laborers or mechanics employed under the contract, which is not listed in the wage determination, shall be classified in conformance with the wage determination.

b. The contracting officer shall approve an additional classification, wage rate and fringe benefits only when the following criteria have been met:

(1) the work to be performed by the additional classification requested is not performed by a classification in the wage determination;

(2) the additional classification is utilized in the area by the construction industry;

(3) the proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination; and

(4) with respect to helpers, when such a classification prevails in the area in which the work is performed.

c. If the contractor or subcontractors, as appropriate, the laborers and mechanics (if known) to be employed in the additional classification or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be

sent by the contracting officer to the DOL, Administrator of the Wage and Hour Division, Employment Standards Administration, Washington, D.C. 20210. The Wage and Hour Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

d. In the event the contractor or subcontractors, as appropriate, the laborers or mechanics to be employed in the additional classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Wage and Hour Administrator for determination. Said Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary

e. The wage rate (including fringe benefits where appropriate) determined pursuant to paragraph 2c or 2d of this Section IV shall be paid to all workers performing work in the additional classification from the first day on which work is performed in the classification.

3. **Payment of Fringe Benefits:**

a. Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor or subcontractors, as appropriate, shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly case equivalent thereof.

b. If the contractor or subcontractor, as appropriate, does not make payments to a trustee or other third person, he/she may consider as a part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, provided, that the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

4. **Apprentices and Trainees (Programs of the U.S. DOL) and Helpers:**

a. Apprentices:

(1) Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the DOL, Employment and Training Administration, Bureau of Apprenticeship and Training, or with a State apprenticeship agency recognized by the Bureau, or if a person is employed in his/her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Bureau of Apprenticeship and Training or a State apprenticeship agency (where appropriate) to be eligible for probationary employment as an apprentice.

(2) The allowable ratio of apprentices to journeyman-level employees on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any employee listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate listed in the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor or subcontractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman-level hourly rate) specified in the contractor's or subcontractor's registered program shall be observed.

(3) Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeyman-level hourly rate specified in

the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator for the Wage and Hour Division determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination.

(4) In the event the Bureau of Apprenticeship and Training, or a State apprenticeship agency recognized by the Bureau, withdraws approval of an apprenticeship program, the contractor or subcontractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the comparable work performed by regular employees until an acceptable program is approved.

b. Trainees:

(1) Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the DOL, Employment and Training Administration.

(2) The ratio of trainees to journeyman-level employees on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed.

(3) Every trainee must be paid at not less than the rate specified in the approved program for his/her level of progress, expressed as a percentage of the journeyman-level hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman-level wage rate on the wage determination which provides for less than full fringe benefits for apprentices, in which case such trainees shall receive the same fringe benefits as apprentices.

(4) In the event the Employment and Training Administration withdraws approval of a training program, the contractor or subcontractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

c. Helpers:

Helpers will be permitted to work on a project if the helper classification is specified and defined on the applicable wage determination or is approved pursuant to the conformance procedure set forth in Section IV.2. Any worker listed on a payroll at a helper wage rate, who is not a helper under an approved definition, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed.

5. **Apprentices and Trainees (Programs of the U.S. DOT):**
Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.

6. **Withholding:**
The SHA shall upon its own action or upon written request of an authorized representative of the DOL withhold, or cause to be withheld, from the contractor or subcontractor under this contract or any other Federal contract with the same prime contractor, or any other Federally-assisted contract subject to Davis-Bacon prevailing wage

requirements which is held by the same prime contractor, as much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainees, and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the SHA contracting officer may, after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

7. **Overtime Requirements:**
No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers, mechanics, watchmen, or guards (including apprentices, trainees, and helpers described in paragraphs 4 and 5 above) shall require or permit any laborer, mechanic, watchman, or guard in any workweek in which he/she is employed on such work, to work in excess of 40 hours in such workweek unless such laborer, mechanic, watchman, or guard receives compensation at a rate not less than one-and-one-half times his/her basic rate of pay for all hours worked in excess of 40 hours in such workweek.

8. **Violation:**
Liability for Unpaid Wages; Liquidated Damages: In the event of any violation of the clause set forth in paragraph 7 above, the contractor and any subcontractor responsible thereof shall be liable to the affected employee for his/her unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory) for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer, mechanic, watchman, or guard employed in violation of the clause set forth in paragraph 7, in the sum of $10 for each calendar day on which such employee was required or permitted to work in excess of the standard work week of 40 hours without payment of the overtime wages required by the clause set forth in paragraph 7.

9. **Withholding for Unpaid Wages and Liquidated Damages:**
The SHA shall upon its own action or upon written request of any authorized representative of the DOL withhold, or cause to be withheld, from any monies payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other Federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph 8 above.

## V. STATEMENTS AND PAYROLLS

(Applicable to all Federal-aid construction contracts exceeding $2,000 and to all related subcontracts, except for projects located on roadways classified as local roads or rural collectors, which are exempt.)

1. **Compliance with Copeland Regulations (29 CFR 3):**

The contractor shall comply with the Copeland Regulations of the Secretary of Labor which are herein incorporated by reference.

2. **Payrolls and Payroll Records:**

a. Payrolls and basic records relating thereto shall be maintained by the contractor and each subcontractor during the course of the work and preserved for a period of 3 years from the date of completion of the contract for all laborers, mechanics, apprentices, trainees, watchmen, helpers, and guards working at the site of the work.

b. The payroll records shall contain the name, social security number, and address of each such employee; his or her correct classification; hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalent thereof the types described in Section 1(b)(2)(B) of the Davis Bacon Act); daily and weekly number of hours worked; deductions made; and actual wages paid. In addition, for Appalachian contracts, the payroll records shall contain a notation indicating whether the employee does, or does not, normally reside in the labor area as defined in Attachment A, paragraph 1. Whenever the Secretary of Labor, pursuant to Section IV, paragraph 3b, has found that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in Section 1(b)(2)(B) of the Davis Bacon Act, the contractor and each subcontractor shall maintain records which show

that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, that the plan or program has been communicated in writing to the laborers or mechanics affected, and show the cost anticipated or the actual cost incurred in providing benefits. Contractors or subcontractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprentices and trainees, and ratios and wage rates prescribed in the applicable programs.

c. Each contractor and subcontractor shall furnish, each week in which any contract work is performed, to the SHA resident engineer a payroll of wages paid each of its employees (including apprentices, trainees, and helpers, described in Section IV, paragraphs 4 and 5, and watchmen and guards engaged on work during the preceding weekly payroll period). The payroll submitted shall set out accurately and completely all of the information required to be maintained under paragraph 2b of this Section V. This information may be submitted in any form desired. Optional Form WH-347 is available for this purpose and may be purchased from the Superintendent of Documents (Federal stock number 029-005-0014-1), U.S. Government Printing Office, Washington, D.C. 20402. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors.

d. Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his/her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:

(1) that the payroll for the payroll period contains the information required to be maintained under paragraph 2b of this Section V and that such information is correct and complete;

(2) that such laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in the Regulations, 29 CFR 3;

(3) that each laborer or mechanic has been paid not less that the applicable wage rate and fringe benefits or cash equivalent for the classification of worked performed, as specified in the applicable wage determination incorporated into the contract.

e. The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH-347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 2d of this Section V.

f. The falsification of any of the above certifications may subject the contractor to civil or criminal prosecution under 18 U.S.C. 1001 and 31 U.S.C. 231.

g. The contractor or subcontractor shall make the records required under paragraph 2b of this Section V available for inspection, copying, or transcription by authorized representatives of the SHA, the FHWA, or the DOL, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the SHA, the FHWA, the DOL, or all may, after written notice to the contractor, sponsor, applicant, or owner, take such actions as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

## VI. RECORD OF MATERIALS, SUPPLIES, AND LABOR

1. On all Federal-aid contracts on the National Highway System, except those which provide solely for the installation of protective devices at railroad grade crossings, those which are constructed on a force account or direct labor basis, highway beautification contracts, and contracts for which the total final construction cost for roadway and bridge is less than $1,000,000 (23 CFR 635) the contractor shall:

a. Become familiar with the list of specific materials and supplies contained in Form FHWA-47, "Statement of Materials and Labor Used by Contractor of Highway Construction Involving Federal Funds," prior to the commencement of work under this contract.

b. Maintain a record of the total cost of all materials and supplies purchased for and incorporated in the work, and also of the quantities of those specific materials and supplies listed on Form FHWA-47, and in the units shown on Form FHWA-47.

c. Furnish, upon the completion of the contract, to the SHA resident engineer on Form FHWA-47 together with the data required in paragraph 1b relative to materials and supplies, a final labor summary of all contract work indicating the total hours worked and the total amount earned.

2. At the prime contractor's option, either a single report covering all contract work or separate reports for the contractor and for each subcontract shall be submitted.

## VII. SUBLETTING OR ASSIGNING THE CONTRACT

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the State. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635).

   a. "Its own organization" shall be construed to include only workers employed and paid directly by the prime contractor and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor, assignee, or agent of the prime contractor.

   b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid on the contract as a whole and in general are to be limited to minor components of the overall contract.

2. The contract amount upon which the requirements set forth in paragraph 1 of Section VII is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3. The contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the SHA contracting officer determines is necessary to assure the performance of the contract.

4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the SHA contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the SHA has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract.

## VIII. SAFETY - ACCIDENT PREVENTION

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the SHA contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract.

2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 333).

3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of

compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 333).

## IX. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, the following notice shall be posted on each Federal-aid highway project (23 CFR 635) in one or more places where it is readily available to all persons concerned with the project:

**Notice To All Personnel Engaged On Federal-Aid Highway Projects**

18 U.S.C. 1020 READS AS FOLLOWS:

"Whoever being an officer, agent, or employee of the United States, or any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 1, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined not more that $10,000 or imprisoned not more than 5 years or both."

## X. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT

(Applicable to all Federal-aid construction contracts and to all related subcontracts of $100,000 or more.)

By submission of this bid or the execution of this contract, or subcontract, as appropriate, the bidder, Federal-aid construction contractor, or subcontractor, as appropriate, will be deemed to have stipulated as follows:

1. That any facility that is or will be utilized in the performance of this contract, unless such contract is exempt under the Clean Air Act, as amended (42 U.S.C. 1857 et seq., as amended by Pub.L. 91-604), and under the Federal Water Pollution Control Act, as amended (33 U.S.C. 1251 et seq., as amended by Pub.L. 92-500), Executive Order 11738, and regulations in implementation thereof (40 CFR 15) is not listed, on the date of contract award, on the U.S. Environmental Protection Agency (EPA) List of Violating Facilities pursuant to 40 CFR 15.20.

2. That the firm agrees to comply and remain in compliance with all the requirements of Section 114 of the Clean Air Act and Section 308 of the Federal Water Pollution Control Act and all regulations and guidelines listed thereunder.

3. That the firm shall promptly notify the SHA of the receipt of any communication from the Director, Office of Federal Activities, EPA, indicating that a facility that is or will be utilized for the contract is under consideration to be listed on the EPA List of Violating Facilities.

4. That the firm agrees to include or cause to be included the requirements of paragraph 1 through 4 of this Section X in every nonexempt subcontract, and further agrees to take such action as the government may direct as a means of enforcing such requirements.

## XI. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

1. **Instructions for Certification - Primary Covered Transactions:**
(Applicable to all Federal-aid contracts - 49 CFR 29)

a. By signing and submitting this proposal, the prospective primary participant is providing the certification set out below.

b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this covered transaction. The prospective participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective primary participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction.

c. The certification in this clause is a material representation of fact upon which reliance was placed when the department or agency determined to enter into this transaction. If it is later determined that the prospective primary participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause of default.

d. The prospective primary participant shall provide immediate written notice to the department or agency to whom this proposal is submitted if any time the prospective primary participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.

e. The terms "covered transaction," "debarred," "suspended," "ineligible," "lower tier covered transaction," "participant," "person," "primary covered transaction," "principal," "proposal," and "voluntarily excluded," as used in this clause, have the meanings set out in the Definitions and Coverage sections of rules implementing Executive Order 12549. You may contact the department or agency to which this proposal is submitted for assistance in obtaining a copy of those regulations.

f. The prospective primary participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction.

g. The prospective primary participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," provided by the department or agency entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions.

h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant may decide the method and frequency by which it determines the eligibility of its principals. Each participant may, but is not required to, check the nonprocurement portion of the "Lists of Parties Excluded From Federal Procurement or Nonprocurement Programs" (Nonprocurement List) which is compiled by the General Services Administration.

i. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph f of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default.

2. **Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion — Primary Covered Transactions:**

a. The prospective primary participant certifies to the best of its knowledge and belief, that it and its principals:

(1) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from covered transactions by any Federal department or agency;

(2) Have not within a 3-year period preceding this proposal been convicted of or had a civil judgement rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;

(3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph 1b of this certification; and

(4) Have not within a 3-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.

b. Where the prospective primary participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

3. **Instructions for Certification - Lower Tier Covered Transactions:**
(Applicable to all subcontracts, purchase orders and other lower tier transactions of $25,000 or more - 49 CFR 29)

a. By signing and submitting this proposal, the prospective lower tier is providing the certification set out below.

b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances.

d. The terms "covered transaction," "debarred," "suspended," "ineligible," "primary covered transaction," "participant," "person," "principal," "proposal," and "voluntarily excluded," as used in this clause, have the meanings set out in the Definitions and Coverage sections of rules implementing Executive Order 12549. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations.

e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.

f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions.

g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant may decide the method and frequency by which it determines the eligibility of its principals. Each participant may, but is not required to, check the Nonprocurement List.

h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

4. **Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion — Lower Tier Covered Transactions:**

a. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participation in this transaction by any Federal department or agency.

b. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

## XII. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

(Applicable to all Federal-aid construction contracts and to all related subcontracts which exceed $100,000 - 49 CFR 20)

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than $10,000 and not more than $100,000 for each such failure.

3. The prospective participant also agrees by submitting his or her bid or proposal that he or she shall require that the language of this certification be included in all lower tier subcontracts, which exceed $100,000 and that all such recipients shall certify and disclose accordingly.

## FEDERAL-AID FEMALE AND MINORITY GOALS

In accordance with Section II, "Nondiscrimination," of "Required Contract Provisions Federal-aid Construction Contracts" the following are the goals for female utilization:

Goal for Women (applies nationwide).....(percent) 6.9

The following are goals for minority utilization:

### CALIFORNIA ECONOMIC AREA

| | | Goal (Percent) |
|---|---|---|
| **174** | **Redding, CA:** | |
| | Non-SMSA Counties | 6.8 |
| | CA Lassen; CA Modoc;CA Plumas;CA Shasta; CA Siskiyou; CA Tehama. | |
| **175** | **Eureka, CA** | |
| | Non-SMSA Counties | 6.6 |
| | CA Del Norte; CA Humboldt; CA Trinity. | |
| **176** | **San Francisco-Oakland-San Jose, CA:** | |
| | SMSA Counties: | |
| | 7120 Salinas-Seaside-Monterey, CA | 28.9 |
| | CA Monterey. | |
| | 7360 San Francisco-Oakland | 25.6 |
| | CA Alameda; CA Contra Costa; CA Marin; CA San Francisco; CA San Mateo. | |
| | 7400 San Jose, CA | 19.6 |
| | CA Santa Clara. | |
| | 7485 Santa Cruz, CA. | 14.9 |
| | CA Santa Cruz. | |
| | 7500 Santa Rosa, CA | 9.1 |
| | CA Sonoma. | |
| | 8720 Vallejo-Fairfield- Napa, CA | 17.1 |
| | CA Napa; CA Solano | |
| | Non-SMSA Counties | 23.2 |
| | CA Lake; CA Mendocino; CA San Benito | |
| **177** | **Sacramento, CA**: | |
| | SMSA Counties: | |
| | 6920 Sacramento, CA | 16.1 |
| | CA Placer; CA Sacramento; CA Yolo. | |
| | Non-SMSA Counties | 14.3 |
| | CA Butte; CA Colusa; CA El Dorado; CA Glenn; CA Nevada; CA Sierra; CA Sutter; CA Yuba. | |
| **178** | **Stockton-Modesto, CA:** | |
| | SMSA Counties: | |
| | 5170 Modesto, CA | 12.3 |
| | CA Stanislaus. | |
| | 8120 Stockton, CA | 24.3 |
| | CA San Joaquin. | |
| | Non-SMSA Counties | 19.8 |
| | CA Alpine; CA Amador; CA Calaveras; CA Mariposa;CA Merced; CA Tuolumne. | |

| | | Goal (Percent) |
|---|---|---|
| **179** | **Fresno-Bakersfield, CA** | |
| | SMSA Counties: | |
| | 0680 Bakersfield, CA | 19.1 |
| | CA Kern. | |
| | 2840 Fresno, CA | 26.1 |
| | CA Fresno. | |
| | Non-SMSA Counties | 23.6 |
| | CA Kings; CA Madera; CA Tulare. | |
| **180** | **Los Angeles, CA:** | |
| | SMSA Counties: | |
| | 0360 Anaheim-Santa Ana-Garden Grove, CA | 11.9 |
| | CA Orange. | |
| | 4480 Los Angeles-Long Beach, CA | 28.3 |
| | CA Los Angeles. | |
| | 6000 Oxnard-Simi Valley-Ventura, CA | 21.5 |
| | CA Ventura. | |
| | 6780 Riverside-San Bernardino-Ontario, CA. | 19.0 |
| | CA Riverside; CA San Bernardino. | |
| | 7480 Santa Barbara-Santa Maria-Lompoc, CA | 19.7 |
| | CA Santa Barbara. | |
| | Non-SMSA Counties | 24.6 |
| | CA Inyo; CA Mono; CA San Luis Obispo. | |
| **181** | **San Diego, CA:** | |
| | SMSA Counties | |
| | 7320 San Diego, CA. | 16.9 |
| | CA San Diego. | |
| | Non-SMSA Counties | 18.2 |
| | CA Imperial. | |

In addition to the reporting requirements set forth elsewhere in this contract the Contractor and subcontractors holding subcontracts, not including material suppliers, of $10,000 or more, shall submit for every month of July during which work is performed, employment data as contained under Form FHWA PR-1391 (Appendix C to 23 CFR, Part 230), and in accordance with the instructions included thereon.

## FEDERAL REQUIREMENT TRAINING SPECIAL PROVISIONS

As part of the Contractor's equal employment opportunity affirmative action program, training shall be provided as follows:

The Contractor shall provide on-the-job training to develop full journeymen in the types of trades or job classification involved.

The goal for the number of trainees or apprentices to be trained under the requirements of this special provision will be 14.

In the event the Contractor subcontracts a portion of the contract work, he shall determine how many, if any, of the trainees or apprentices are to be trained by the subcontractor, provided however, that the Contractor shall retain the primary responsibility for meeting the training requirements imposed by this special provision. The Contractor shall also insure that this Training Special Provision is made applicable to such subcontract. Where feasible, 25 percent of trainees or apprentices in each occupation shall be in their first year of apprenticeship or training.

The number of trainees or apprentices shall be distributed among the work classifications on the basis of the Contractor's needs and the availability of journeymen in the various classifications within a reasonable area of recruitment. Prior to commencing work, the Contractor shall submit to the Department for approval the number of trainees or apprentices to be trained in each selected classification and training program to be used. Furthermore, the Contractor shall specify the starting time for training in each of the classifications. The Contractor will be credited for each trainee or apprentice employed by him on the contract work who is currently enrolled or becomes enrolled in an approved program and will be reimbursed for such trainees or apprentices as provided hereinafter.

Training and upgrading of minorities and women toward journeymen status is a primary objective of this Training Special Provision. Accordingly, the Contractor shall make every effort to enroll minority and women trainees or apprentices (e.g., by conducting systematic and direct recruitment through public and private sources likely to yield minority and women trainees or apprentices) to the extent such persons are available within a reasonable area of recruitment. The Contractor will be responsible for demonstrating the steps that he has taken in pursuance thereof, prior to a determination as to whether the Contractor is in compliance with this Training Special Provision. This training commitment is not intended, and shall not be used, to discriminate against any applicant for training, whether a member of a minority group or not.

No employee shall be employed as a trainee or apprentice in any classification in which he has successfully completed a training course leading to journeyman status or in which he has been employed as a journeyman. The Contractor should satisfy this requirement by including appropriate questions in the employee application or by other suitable means. Regardless of the method used the Contractor's records should document the findings in each case.

The minimum length and type of training for each classification will be as established in the training program selected by the Contractor and approved by both the Department and the Federal Highway Administration. The Department and the Federal Highway Administration will approve a program if it is reasonably calculated to meet the equal employment opportunity obligations of the Contractor and to qualify the average trainee or apprentice for journeyman status in the classification concerned by the end of the training period. Furthermore, apprenticeship programs registered with the U.S. Department of Labor, Bureau of Apprenticeship and Training, or with the State of California, Department of Industrial Relations, Division of Apprenticeship Standards recognized by the Bureau and training programs approved but not necessarily sponsored by the U.S. Department of Labor, Manpower Administration, Bureau of Apprenticeship and Training shall also be considered acceptable provided it is being administered in a manner consistent with the equal employment obligations of Federal-aid highway construction contracts. Approval or acceptance of a training program shall be obtained from the State prior to commencing work on the classification covered by the program. It is the intention of these provisions that training is to be provided in the construction crafts rather than clerk-typists or secretarial-type positions. Training is permissible in lower level management positions such as office engineers, estimators, timekeepers, etc., where the training is oriented toward construction applications. Training in the laborer classification may be permitted provided that significant and meaningful training is provided and approved by the division office. Some offsite training is permissible as long as the training is an integral part of an approved training program and does not comprise a significant part of the overall training.

Except as otherwise noted below, the Contractor will be reimbursed 80 cents per hour of training given an employee on this contract in accordance with an approved training program. As approved by the Engineer, reimbursement will be made for training of persons in excess of the number specified herein. This reimbursement will be made even though the Contractor receives additional training program funds from other sources, provided such other source does not specifically prohibit the Contractor from receiving other reimbursement. Reimbursement for offsite training indicated above may only be made to the Contractor where he does one or more of the following and the trainees or apprentices are concurrently employed on a Federal-aid project; contributes to the cost of the training, provides the instruction to the trainee or apprentice or pays the trainee's or apprentice's wages during the offsite training period.

No payment shall be made to the Contractor if either the failure to provide the required training, or the failure to hire the trainee or apprentice as a journeyman, is caused by the Contractor and evidences a lack of good faith on the part of the Contractor in meeting the requirements of this Training Special Provision. It is normally expected that a trainee or apprentice

will begin his training on the project as soon as feasible after start of work utilizing the skill involved and remain on the project as long as training opportunities exist in his work classification or until he has completed his training program. It is not required that all trainees or apprentices be on board for the entire length of the contract. A Contractor will have fulfilled his responsibilities under this Training Special Provision if he has provided acceptable training to the number of trainees or apprentices specified. The number trained shall be determined on the basis of the total number enrolled on the contract for a significant period.

Only trainees or apprentices registered in a program approved by the State of California's State Administrator of Apprenticeship may be employed on the project and said trainees or apprentices shall be paid the standard wage specified under the regulations of the craft or trade at which they are employed.

The Contractor shall furnish the trainee or apprentice a copy of the program he will follow in providing the training. The Contractor shall provide each trainee or apprentice with a certification showing the type and length of training satisfactorily completed.

The Contractor will provide for the maintenance of records and furnish periodic reports documenting his performance under this Training Special Provision.